


RetractaPost-GL 745 745mm **Stainless Steel**

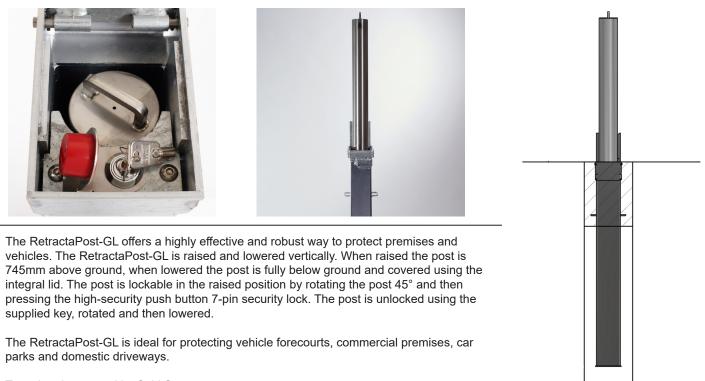

Tested and approved by Sold Secure.

This product has achieved Secure by Design status.

Description

76mm Stainless Steel

90mm Stainless Steel

101mm Stainless Steel

114mm Stainless Steel

<u>Lift Weight (kg)</u>	<u>Weight (kg)</u>
4kg	17kg
5kg	23kg
6kg	26kg

7kg



Part Number

138 130 389

138 130 429

138 130 439

138 130 448

Secured by Design

Police Preferred Specification

Product details

745mm (above ground when raised) Socket - 1070mm (below ground)

2mm wall thickness

- Red/white chevron tape available extra
- - Installation & use Bolt down to a suitable concrete surface.

27kg

Telescopic, removable and concrete in are supplied with welded fixing spikes to ensure firm ground anchorage into concrete. Telescopic, removable and concrete in require a suitable excavated hole for installing into concrete. Products are guaranteed for 12 months (if installed and used correctly).



www.autopa.co.uk +44 (0)1788 550556

AUTOPA Limited Cottage Leap, Rugby, Warwickshire CV21 3XP

