


## Domed Top Bollard 60mm, 76mm and 90mm Diameter Galvanised or Galvanised & Colour





The AUTOPA Domed Top Bollard combines mild steel tube with a high grade, impact resistant, malleable cast iron cap. The Domed Top Bollard is an elegantly simple bollard, ideal for providing protection against unauthorised parking or access. The Domed Top Bollard is ideal for use around pedestrian precincts, pavements, play and parking areas, as part of traffic calming measures, pedestrianisation schemes and as a deterrent to ram-raiders.

The Domed Top Bollard is available in galvanised and galvanised & coated finishes. It is also available Ragged for casting in to concrete, Flanged for bolting down or in Removable versions (price excludes fixing down bolts for flanged version and paclock to secure removable version).

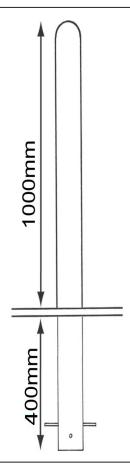

Part Number	<u>Description</u>	Weight (kg)
138 121 130	60mm, Galvanised - Concrete In	6kg
138 121 131	60mm, Galvanised & Colour - Concrete In	6kg
138 121 132	60mm, Galvanised - Bolt Down	6kg
138 121 133	60mm, Galvanised & Colour - Bolt Down	6kg
138 121 260	76mm, Galvanised - Concrete In	7kg
138 121 261	76mm, Galvanised & Colour - Concrete In	7kg
138 121 262	76mm, Galvanised - Bolt Down	7kg
138 121 263	76mm, Galvanised & Colour - Bolt Down	7kg
138 121 270	90mm, Galvanised - Concrete In	9kg
138 121 271	90mm, Galvanised & Colour - Concrete In	9kg
138 121 268	90mm, Galvanised - Bolt Down	9kg
138 121 269	90mm, Galvanised & Colour - Bolt Down	9kg

## **Product details**

- · 1000mm height above ground
- 3mm wall thickness

- Concrete in 400mm (below ground)
- · Price excludes fixing down bolts and padlock to secure

## Installation & use

Bolt down to a suitable concrete surface.

Telescopic, removable and concrete in are supplied with welded fixing spikes to ensure firm ground anchorage into concrete.

Telescopic, removable and concrete in require a suitable excavated hole for installing into concrete.

Products are guaranteed for 12 months (if installed and used correctly).



www.autopa.co.uk +44 (0)1788 550556

