

Mitre Top Bollard 1000mm Above Ground 76mm - 139mm Diameter Galvanised






The AUTOPA Mitre Top Bollard has a modern and striking design. Aesthetically pleasing, this simple, elegant bollard is perfect for preventing unauthorised vehicle access or parking in communal areas.

Manufactured from galvanised mild steel, it is designed to look good on even the busiest sites for many years. Supplied ragged as standard, flanged and removable are also available. Fixing bolts for the flanged version, and padlock to secure the removable version are available at an extra cost.

Colour coated versions are available upon request (please state RAL number at time of order).

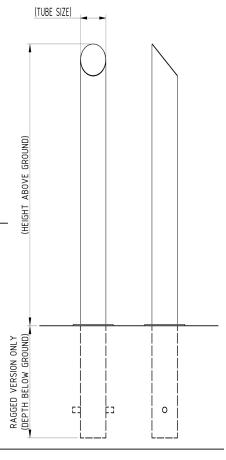

| Part Number | <u>Description</u> | Weight (kg) |
|-------------|--------------------------------|-------------|
| 138 121 225 | 76mm Galvanised - Concrete In | 7kg |
| 138 121 227 | 76mm Galvanised - Bolt Down | 7kg |
| 138 121 295 | 90mm Galvanised - Concrete In | 9kg |
| 138 121 297 | 90mm Galvanised - Bolt Down | 9kg |
| 138 121 315 | 101mm Galvanised - Concrete In | 10kg |
| 138 121 317 | 101mm Galvanised - Bolt Down | 10kg |
| 138 121 415 | 114mm Galvanised - Concrete In | 12kg |
| 138 121 416 | 114mm Galvanised - Bolt Down | 12kg |
| 138 121 515 | 127mm Galvanised - Concrete In | 13kg |
| 138 121 516 | 127mm Galvanised - Bolt Down | 13kg |
| 138 121 615 | 139mm Galvanised - Concrete In | 23kg |
| 138 121 616 | 139mm Galvanised - Bolt Down | 23kg |

Product details

- · 1000mm height above ground
- 3mm wall thickness 76mm 127mm and 152mm diameters
- Concrete in 400mm (below ground)
- 5mm wall thickness -139mm, and 168mm-193mm diameters

Installation & use

Bolt down to a suitable concrete surface.

Telescopic, removable and concrete in are supplied with welded fixing spikes to ensure firm ground anchorage into concrete.

Telescopic, removable and concrete in require a suitable excavated hole for installing into concrete.

Products are guaranteed for 12 months (if installed and used correctly).



www.autopa.co.uk +44 (0)1788 550556

