




Swing Height Restrictor 3m, 4m, 5m, 6m and 7m Galvanised and Colour

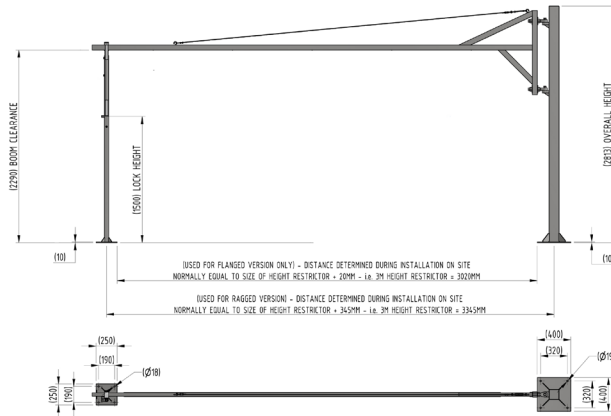

The AUTOPA Swing Height Restrictor has a standard clearance of 2.05m, limiting access to high sided vehicles and is perfect for use on commercial and industrial sites. The beam can be opened to allow full access when needed and can be locked in the open position if necessary using a second catch post.

Manufactured from galvanised mild steel, the body of the height restrictor is coated red as standard (other colours are available upon request; please state BS/RAL numbers at time of order). The AUTOPA Swing Height Restrictor is available ragged or flanged and as an optional extra can be fitted with a knocking bar and/or a maximum height warning sign upon request.

Knock bars to suit the barrier can be supplied at an extra cost.

The standard clearance is 2.05m with a knock bar, 2.2m without a knock bar.



| Part Number | Description |
|-------------|--|
| 138 106 634 | 3m Galvanised & Colour c/w catchpost - Bolt Down |
| 138 106 635 | 3m Galvanised & Colour c/w catchpost - Concrete In |
| 138 106 644 | 4m Galvanised & Colour c/w catchpost - Bolt Down |
| 138 106 645 | 4m Galvanised & Colour c/w catchpost - Concrete In |
| 138 106 654 | 5m Galvanised & Colour c/w catchpost - Bolt Down |
| 138 106 655 | 5m Galvanised & Colour c/w catchpost - Concrete In |
| 138 106 664 | 6m Galvanised & Colour c/w catchpost - Bolt Down |
| 138 106 665 | 6m Galvanised & Colour c/w catchpost - Concrete In |
| 138 106 674 | 7m Galvanised & Colour c/w catchpost - Bolt Down |
| 138 106 675 | 7m Galvanised & Colour c/w catchpost - Concrete In |

Product details

- Standard Clearance: 2.2m (without a knock bar)
- Standard Clearance: 2.05m (with a knock bar) - **Optional Extra**
- Main Body: 90mm x 90mm square tube
- Main Gate Arm: 60mm x 60mm square tube
- 3mm wall thickness
- Concrete in 600mm (below ground)

Installation & use

Bolt down Height Restrictors require bolting down to a suitable concrete surface (no less than 600mm³) by means of four M16 bolts per leg. Concrete in Height Restrictors require an excavated hole (no less than 600mm³) for installation. It is recommended that suitable signs are installed to ensure vehicles are aware of the obstruction. This product is guaranteed for 12 months (if installed and used correctly).



www.autopa.co.uk
+44 (0)1788 550556

AUTOPA Limited
Cottage Leap, Rugby, Warwickshire CV21 3XP

