

Plain Round Bollard 1000mm Above Ground 129mm - 204mm Diameter Stainless Steel






AUTOPA's range of Plain Round Stainless Steel Bollards is a simple and elegant way of controlling vehicle parking and access. Plain Round Stainless Steel Bollards are ideal for use around pedestrian precincts, shops, pavements, play and parking areas, as part of traffic calming measures, pedestrianisation schemes and as a deterrent to ram-raiders.

The complete range of Plain Round Stainless Steel Bollards are available in diameters from 60mm to 204mm in Grade 304 or Grade 316 and available with extended legs for casting into concrete or with a flange plate for bolting down.

Removable versions are also available.

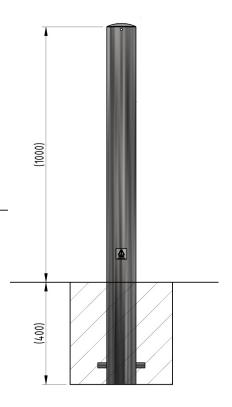

Part Number	<u>Description</u>	Weight (kg)
138 125 129	129mm Stainless Steel Grade 304 - Concrete In	9kg
138 125 130	129mm Stainless Steel Grade 304 - Bolt Down	9kg
138 125 139	139mm Stainless Steel Grade 304 - Concrete In	9kg
138 125 137	139mm Stainless Steel Grade 304 - Bolt Down	9kg
138 125 154	154mm Stainless Steel Grade 304 - Concrete In	10kg
138 125 153	154mm Stainless Steel Grade 304 - Bolt Down	10kg
138 125 168	168mm Stainless Steel Grade 304 - Concrete In	11kg
138 125 173	168mm Stainless Steel Grade 304 - Bolt Down	11kg
138 125 204	204mm Stainless Steel Grade 304 - Concrete In	14kg
138 125 206	204mm Stainless Steel Grade 304 - Bolt Down	14kg

Product details

- · 2mm wall thickness
- Concrete in 400mm (below ground)
- 3 bolts required per bollard (bolt down)

- Round flange plate 200mm x 5mm 129mm and 139mm diameters
- Round flange plate 250mm x 5mm 154mm and 168mm diameters
- Round flange plate 305mm x 5mm 204mm diameter

Installation & use

Bolt down to a suitable concrete surface.

Telescopic, removable and concrete in are supplied with welded fixing spikes to ensure firm ground anchorage into concrete.

Telescopic, removable and concrete in require a suitable excavated hole for installing into concrete.

Products are guaranteed for 12 months (if installed and used correctly).



www.autopa.co.uk +44 (0)1788 550556

