

Gofer Power Solutions, a modern approach to generator & electrical distribution rental.

Our professional rental solutions provide full technical support covering installations, logistics planning, fuel management, 24/7 service & breakdown cover.

Industries Served:



- Events & Entertainment
- Construction
- Utilities
- Manufacturing
- Telecoms
- Facilities Management
- Recycling

Gofer Ltd

Unit 7
Arkwright Road
Hadleigh Road Ind. Est.
Ipswich
Suffolk
IP2 0UB

T: 01473 282530

F: 01473 282531

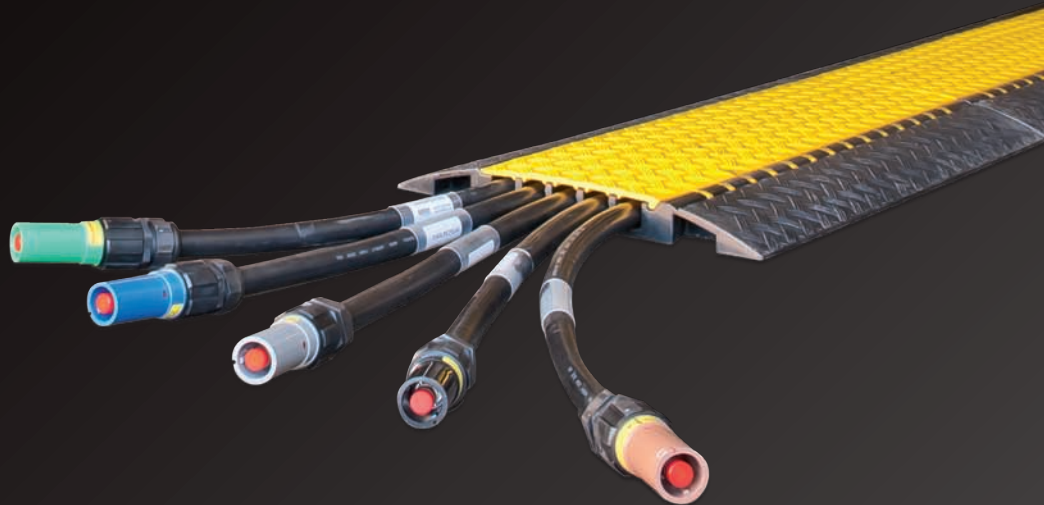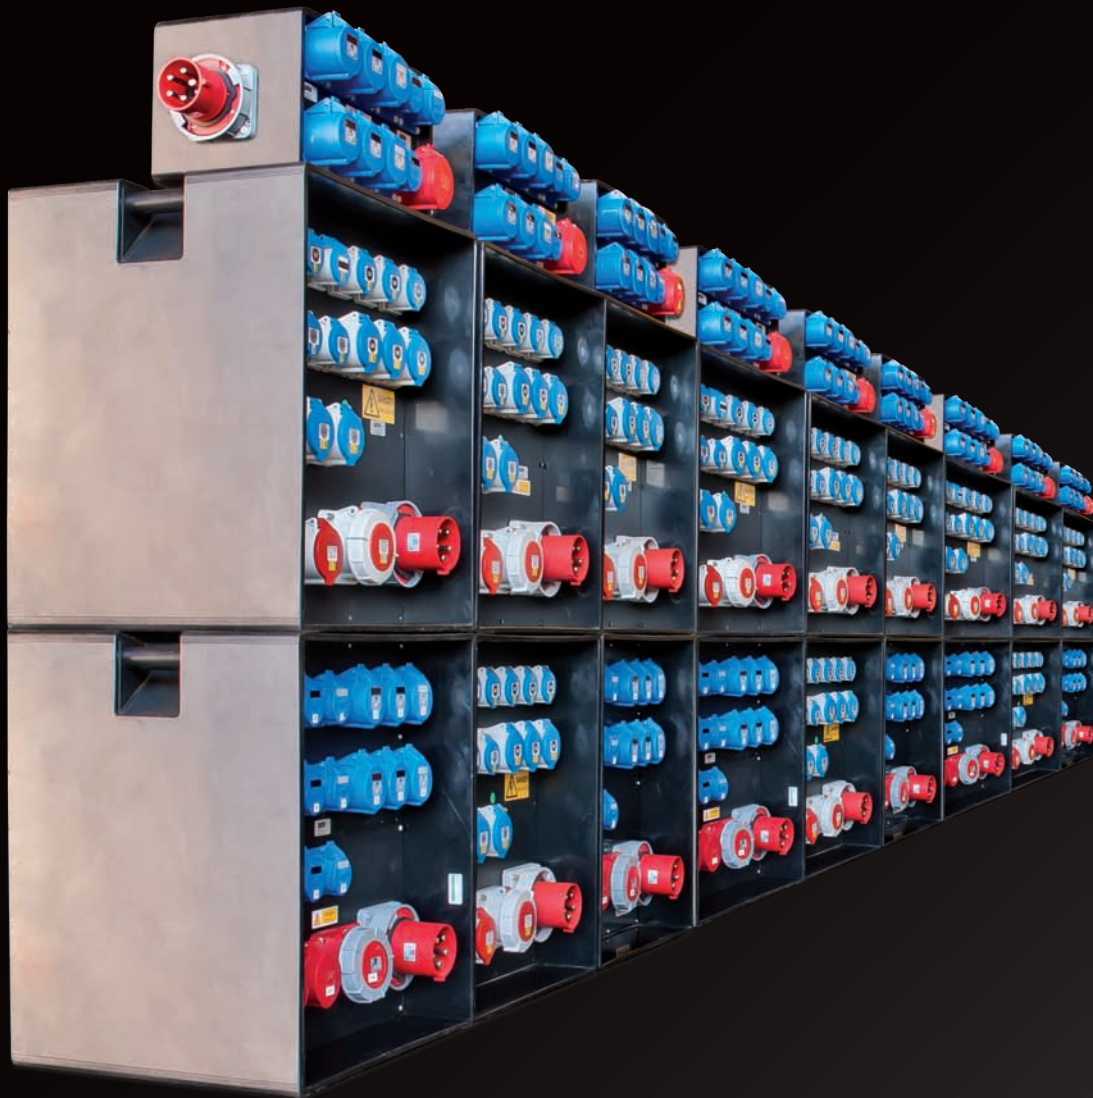

Gofer Power Solutions...

About Gofer...

Gofer have been supplying temporary electrical systems to the event and entertainment industry for over 25 years, from the largest festivals in the country to the most perfectly planned weddings.

As well as events, Gofer support a wide range of industrial and commercial applications across the UK with service and hire.

▶ Contents

- 3 **Electrical Cable**
- 4 **Electrical Distribution**
- 8 **Generators**
- 9 **Fuel Tanks & Bowers**
- 10 **Site Lighting**
- 11 **Cable Ramp**



How to request a quotation.

1. Contact us.

Start by calling our office on 01473 282530 or emailing us on admin@gofer.co.uk

2. The Hire Details.

- What would you like to hire?
- The hire period, when you would like to collect and return?
- If you would like us to manage the transport, when would you like us to deliver and collect?
- Please advise delivery address and contact details if necessary.

3. Your Company Details.

- Company Name.
- Company Address.
- Company Telephone Number and email.
- Contact Name of the person responsible for the hire.

Payment & Invoicing

For new clients, we can accept Cash, Cheque or Debit/Credit Card in advance of the hire starting.

Account holders, please issue an official purchase order number along with the details of the hire when placing an order.

Opening an account.

To open an account simply fill out and return our account application form. Once the application has been received we will then process the application and be in contact. Application forms can be requested from our office.

Defender Midi Cable Ramp

We hold large stocks of Cable Ramp, our 5 channel Midi system will ensure safe cable management throughout your event. The Defender Midi System features 5 cable ducts, moulded connectors, and supports up to Approx 5 tons per typical tyre imprint.

Length: approx. 900mm




Width: approx. 500mm

Ducts: 5 cable ducts

Width: approx. 32mm

Height: approx. 35mm

Weight: approx. 10-12 KG

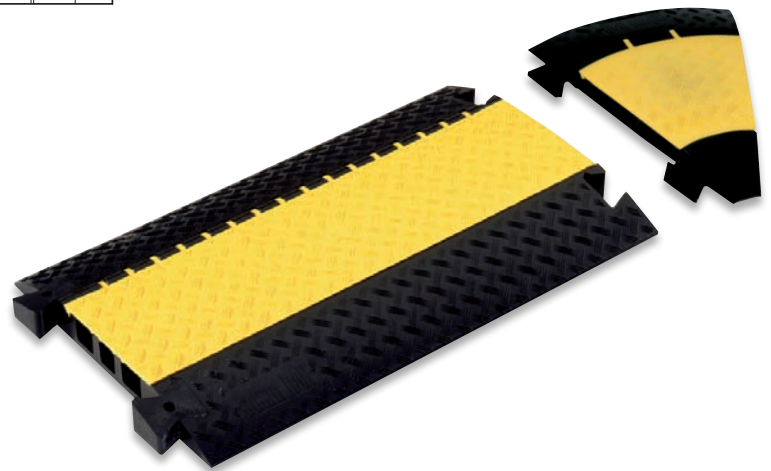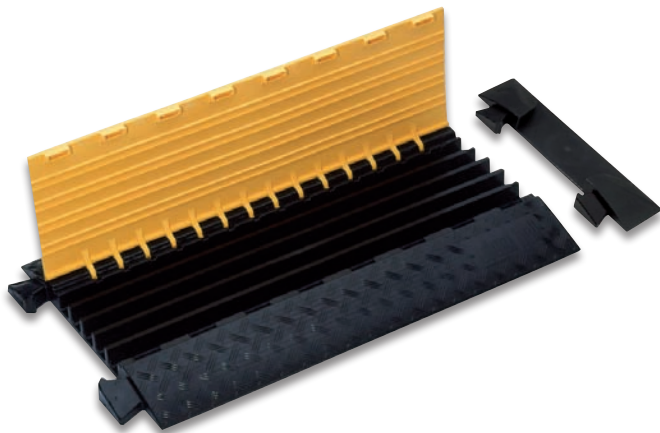

Defender Wheel Chair Ramp

Professional cable protection combined with a practical solution to make the Defender MIDI cable crossovers suitable for wheelchairs, walking frames and trolleys.



Rubber Matting Cable Cover

- Fine-grooved rubber mat black
- 3mm thick
- Width 700mm
- Length 10M
- Non-slip
- Weather proof
- Lays flat
- Coarsely patterned underside




Site Lighting

Our extensive lighting range consists of internal and external units. All fittings are pre-wired with 16a cee-form connectors.


Metal Halide Flood Light

Available with Green, Blue, Magenta or White lamps.
70w to 400w




Fluorescent Lighting

4' and 5' single and twin models.




Sodium Flood Lights

Yellow 70w to 400w




Festoon

1m, 2m, 3m & 5m Spacings.




Halogen Flood Lights

Halogen Flood Lights
White 150w to 1500w.




Twin Head Emergency Lights

Non-maintained.



Emergency & Exit lights

3Hr Maintained and non-maintained.



Tower Lights

Our self generating units are housed in silent, road towable canopies. Suitable for many outdoor applications such as: construction, security, car parks, emergency incidents; plus event and sporting fixtures.

Key features include:

- 4 x 1000w Metal halide lamps
- Vertical hydraulic mast
- 360° Rotation
- Fully automated mast deployment
- Variable height to 9 meters
- 140 litre fuel tank
- 85 Hours running
- Auxillary 240v sockets
- Noise level 59 dB @ 7 meters
- Bio-degradable hydraulic oil



Single & Multi Core Cables

Gofer has a large stock of cables and electrical adapters, both Single and Three phase. Bespoke lengths and configurations are available upon request.

16a 240v 2.5mm 1P+N+E CEE Form plug & socket.



32a 240v 6.0mm 1P+N+E CEE Form plug & socket.



63a 240v 16mm 1P+N+E CEE Form plug & socket.



125a 240v 25mm 1P+N+E CEE Form plug & socket.



32a 415v 6.0mm 3P+N+E CEE Form plug & socket.



63a 415v 16mm 3P+N+E CEE Form plug & socket.



125a 415v 35mm 3P+N+E CEE Form plug & socket.



Individual Single Core Cables available as:

- Lug to Lug.
- Power Lock to Power Lock.
- Lug to Power Lock.

50mm – 5, 10, 15, 25, 50 & 100 metres

70mm – 5, 10, 15, 25 & 50 metres

95mm – 5, 10, 15, 25 & 50 metres

120mm – 5, 10, 15, 25 & 50 metres

240mm – 5, 10, 15, 25 & 50 metres

Multi-Core Cable Lengths						
	5m	10m	15m	25m	50m	100m
16a	•	•	•	•	•	•
32a	•	•	•	•	•	•
63a	•	•	•	•	•	
125a	•	•	•	•	•	
32a	•	•	•	•	•	•
63a	•	•	•	•	•	•
125a	•	•	•	•	•	



GDO1

INPUT
63A 1ø 230V

Overall RCD Protection.
MCB Protection on
each outlet.

OUTPUT
2 x 32A 1ø 230V
4 x 16A 1ø 230V



GDO6

INPUT
63A 3ø 400V

RCD Protection
Each Phase.

OUTPUT
1 x 32A 3ø 400V
3 x 32A 1ø 230V
12 x 16A 1ø 230V



GDO2

INPUT
63A 3ø 400V

Individual
RCBO Protection.

OUTPUT
3 x 32A 1ø 230V
6 x 16A 1ø 230V



GDO7

INPUT
32A 3ø 400V

Overall RCD Protection.
MCB Protection on
each outlet.

OUTPUT
3 x 32A 1ø 230V



GDO3

INPUT
63A 3ø 400V

Individual
RCBO Protection.

OUTPUT
1 x 32A 3ø 400V
2 x 32A 1ø 230V
2 x 16A 1ø 230V



GDO8

INPUT
63A 3ø 400V

MCB Protection
on each outlet.

OUTPUT
2 x 32A 3ø 400V



GDO4

INPUT
32A 1ø 230V

Overall RCD Protection.
MCB Protection on each
outlet.

OUTPUT
4 x 16A 1ø 230V



GDO9

INPUT
63A 1ø 230V

OUTPUT
2 x 16A 1ø 230V (RCBO)
2 x 32A 1ø 230V (RCBO)



GDO5

INPUT
63A 3ø 400V

Individual
RCBO Protection.

OUTPUT
1 x 32A 3ø 400V
2 x 32A 1ø 230V
6 x 16A 1ø 230V



GDO10 mk1

INPUT
32A 1ø 230V

Overall RCD
Protection.
MCB Protec-

OUTPUT
6 x 16A 1ø 230V



Fuel Tanks and Bowsers

Long range bunded metal tanks are available to extend onsite fuel storage. These tanks can be piped into our generators which makes fuel handling cleaner, more manageable and environmentally friendly. Towable bowsers to the same specification are also available for distributing fuel around your site.

Fuel Management

We can oversee your project if required by arranging your re-fuelling logistics and scheduling.

Fuel Tanks & Bowsers Available

10TCG – 990 Litre (L1150 x W1150 x H1320mm)
Weight unladen 550kg.

20TCG – 2000 Litre (L2300 x W1150 x H1320mm)
Weight unladen 862kg.

H10TCG – 1000 Litre (L3020 x W1720 x H1755mm)
Weight unladen 923kg.

Transcube Global (TCG) fuel tanks are bunded to COP regulations to ensure full environmental compliance with Pollution Prevention Guidelines PPG2.

- Stackable 2 high full or 3 high empty to reduce space.
- Full load lifting eyes, fork lift pockets & internally baffled to allow handling of the TCG full of fuel.
- Electric 12V fuel delivery pump with refuelling nozzle.
- 10TCG & H10TCG can be transported full without the need for ADR certification.

Highway tow fuel bowser UN approved IBC (Intermediate Bulk Container) for the transport of fuel under the ADR regulations.



10TCG – 990 Litre Fuel Tank.



H10TCG – 1000 Litre Fuel Bowser.



Event Power Generation

Gofer's event generator fleet supply instant power wherever you need it. Sets range from 20kVA to 150kVA and each set is trailer mounted for fast deployment, difficult access or sensitive areas with electrical distribution mounted onboard for ease of use.

We know how important it is that you have peace of mind at your event. To ensure a stable power supply we have a selection of AMF (Automatic Mains Failure) and synchronised systems available.



Industrial Power Application

Industrial application generator sets are available from 4kVA through to 1250kVA with a selection of AMF (Automatic Mains Failure) and synchronised systems available.

Industries served:

- Construction
- Utilities
- Telecoms
- Recycling
- Agricultural
- Residential
- Facilities Management
- Manufacturing



GDQ10 mk2

INPUT
32A 3ø 400V

OUTPUT
6 X 16A 1ø 230V

Overall RCD Protection.
MCB Protection on each outlet.



GD3

INPUT
125A 3ø 400V

OUTPUT
3 x 125A 1ø 230V (MCB)



GDQ11

INPUT
63A 3ø 400v

OUTPUT
6 X 32A 1ø 230V

Individual RCBO Protection.



GD4

INPUT
63A 3ø 400V

OUTPUT
3 x 63A 1ø 230V (MCB)



GD1 mk1

INPUT
125A 3ø 400V

OUTPUT
2 X 63A 1ø 230V (MCB)
1 x 32A 3ø 400V (MCB)
3 x 32A 1ø 230V (RCBO)
4 x 16A 1ø 230V (RCBO)



GD5

INPUT
125A 3ø 400V

OUTPUT
2 x 63A 3ø 400V (MCB)
3 X 63A 1ø 230V (MCB)



GD1 mk2

INPUT
125A 3ø 400V

OUTPUT
1 x 63A 3ø 400V (MCB)
1 X 63A 1ø 230V (MCB)
1 x 32A 3ø 400V (MCB)
3 x 32A 1ø 230V (RCBO)
4 x 16A 1ø 230V (RCBO)



GD6

INPUT
125A 1ø 230V

OUTPUT
2 x 63A 1ø 230V (MCB)



GD2

INPUT
125A 3ø 400V

OUTPUT
2 x 63A 3ø 400V (MCB)



GD8

INPUT
125A 3ø 400V

OUTPUT
4 x 32A 3ø 400V (MCB)



GD11

INPUT
63A 3ø 400V

OUTPUT
1 x 32A 3ø 400V (MCB)
6 x 32A 1ø 230V (RCBO)
3 x 16A 1ø 230V (RCBO)



GD12

INPUT
125A 3ø 400V

OUTPUT
1 x 63A 3ø 400V (MCB)
2 x 32A 3ø 400V (MCB)
6 x 32A 1ø 230V (RCBO)
9 x 16A 1ø 230V (RCBO)



GD CSPLIT

INPUT
32A 1ø 230V

OUTPUT
2 x 16A 1ø 230V (MCB)



GDL5633

INPUT
400A Power Lock

OUTPUT
1 x 125A 3ø 400V (MCB)
5 x 63A 3ø 400V (RCD)



GDL4 125

INPUT
400A Power Lock

OUTPUT
4 x 125A 3ø 400V (MCB)



GDL600

INPUT
600A Power Lock

OUTPUT
2 x 125A 3ø 400V (MCB)
4 x 63A 3ø 400V (RCD)



GDL1

INPUT
400A Power Lock

OUTPUT
3 x 63A 3ø 400V (MCB)
3 x 63A 1ø 230V (MCB)



GDL4 Trip

INPUT
400A Power Lock

OUTPUT
400A Power Lock

Variable RCD Protection



GDL2

INPUT
400A Power Lock

OUTPUT
1 x 125A 3ø 400V (MCB)
2 x 63A 3ø 400V (MCB)
2 x 32A 3ø 400V (MCB)
6 x 32A 1ø 230V (RCBO)



GD1175

INPUT
Busbar 3ø 400V 1175A Max

OUTPUT
2 x 400A Power Lock Vairable RCD
3 x 125A 3ø 400V Vairable RCD



GDL4633

INPUT
400A Power Lock

OUTPUT
4 x 63A 3ø 400V



GDM2432

INPUT
Busbar 3ø 400V

OUTPUT
24 x 32A 1ø 230V
1 x 63A 3ø 400V



GD TRIPS


We have a large range of variable RCD units from 16A 1ø 230V to 400A 3ø 400V



GD PLUG BOARDS

INPUT
16A OR 32A 240V

OUTPUT
13A 1ø 230V



Splitters & Adaptors

A wide range of splitters and adaptors are available for hire.



Transformers

5kVA 240v 32a 1P+N+E incoming supply to 110v output.

- 4 x 16a 110v sockets.
- 2 x 32a 110v sockets.
- Sockets protected with MCB's.
- Size (L545 x W430 x H370mm).
- Heavy duty steel enclosure.

10kVA 415v 32a 3P+N+E incoming supply to 110v output.

- 4 x 16a 110v sockets
- 2 x 32a 110v sockets

Automatic Mains Failure Panels (AMF)

These panels are designed for backing up an electrical supply which may be unreliable or it is critical to maintain continuity of service. (This is not a seamless change over.



- 125A
- 250A
- 400A
- 800A
- 1600A
- 2000A

