

LED Panels

Main Benefits



White powder coated frames – to match ceiling grids.



Instant start



1-10V dimmable option



External drivers – plug-and-play



Emergency packs available




Occupancy detector compatible



Up to 50% energy saving



5 year warranty

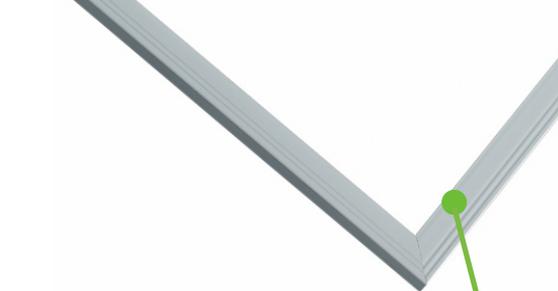

White powder coated frame



Suspension kit



Emergency pack



Surface mounting frame

Product Specifications

Item	600x600mm / 40W	300x1200mm / 40W	600x1200mm / 70W
Rated Power	40W	40W	70W
LED Quantity	224 pcs	224 pcs	476 pcs
LuminousFlux	typ.4000	typ.4000	typ.7000
Wattage	40±5%	40±5%	70±5%
Product Dimensions	595mm x 595mm x 10mm	295mm x 1195mm x 10mm	595mm x 1195mm x 10mm
LED Type	Epistar 4014		
Power Factor	PF>0.95		
LuminousEfficiency	typ.100lm/W		
Color Temperature	4000K, 5000K & 6000K		
Color Index	Ra >80		
Input/workingvoltage	AC90-277V		
Switching cycles before failure	>200,000		
Starting time	<0.5s		
Viewing Angle	120 degree		
Housing Material	White powder coated aluminium frame		
Life Time	Up to 30,000 Hours		
Protection Class	IP20		
Warranty	5 years		
Fire Rating	V-0		