


**dual
pumps**



Zeta



Diesel

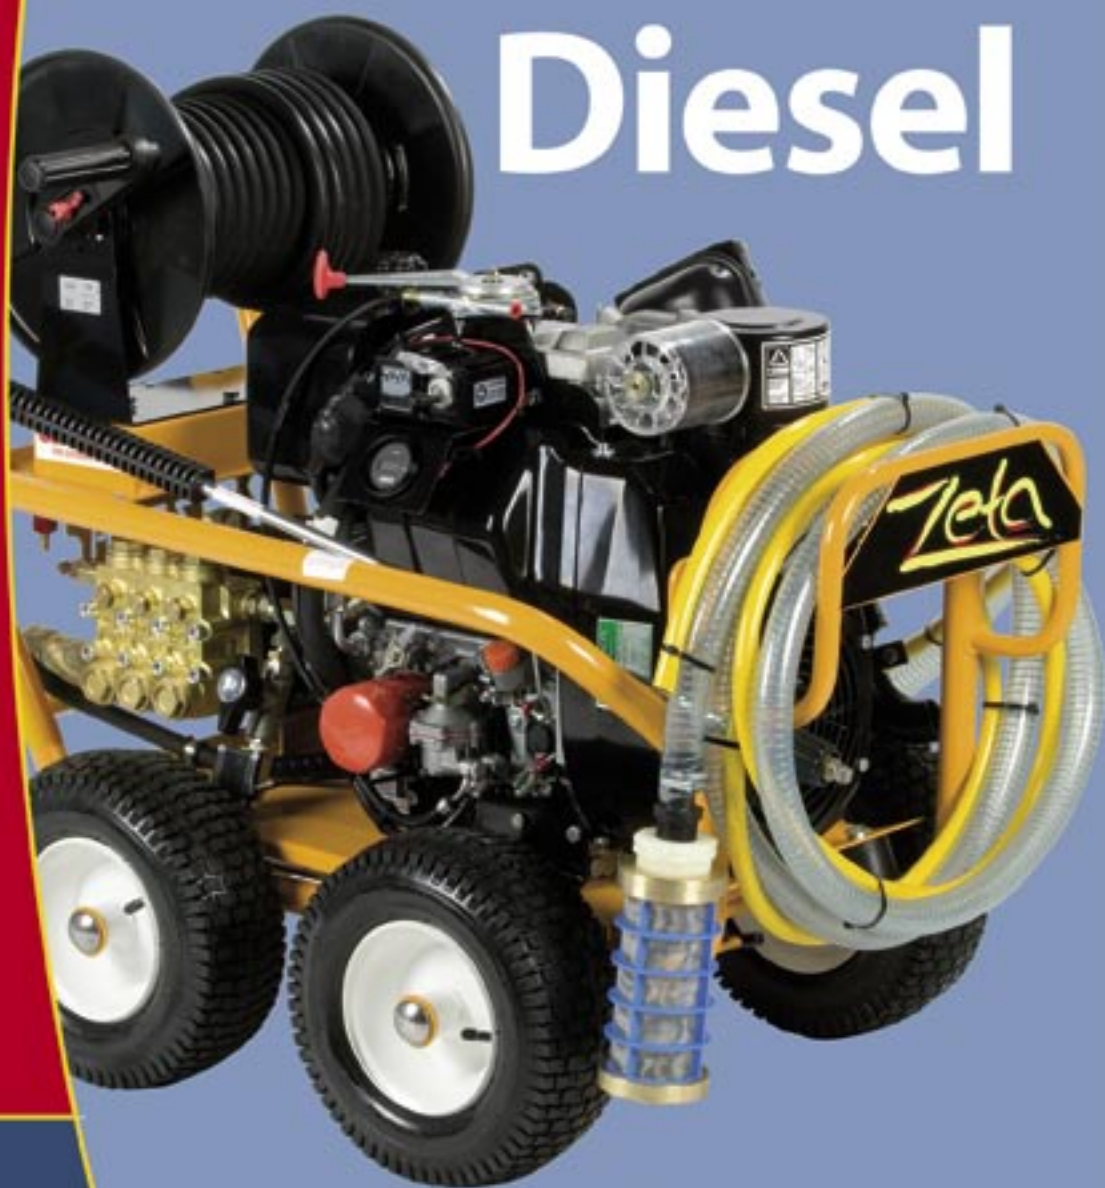

Designed for
professional users
the Zeta packs
a powerful punch

**30 Lpm
200 Bar**

**dual
pumps**

Diesel

Zeta

Designed for professional users the Zeta packs a powerful punch. With its massive 200 bar at 30 litres a minute it delivers an outstanding cleaning performance.

The Zeta's amazing cleaning power is achieved by combining a world leading Interpump 66 Series with a rugged 19 Hp Lombardini twin cylinder air-cooled diesel engine.

Driven via a 2:1 ratio gearbox the pump is fitted as standard with an automatic speed controller, allowing the engine to run at idle when off-load, reducing noise & fuel consumption. For total flexibility a manual over-ride hand throttle is also fitted to the engine.



An easily accessible control panel is fitted with twin high pressure outlets allowing multiple operators to simultaneously harness the Zeta's amazing power.

With its incredible power & exclusive features the Zeta is invaluable for all cleaning applications where you need a powerful, compact & portable cleaning source.

General	
Weight	170kg
Dimensions	L1200 W600 H860 mm
Noise level	LWA 117dB
HP hose	10m with quick release couplings
Suction hose	4m with 50 mesh weighted filter
Lance	1m single with high-low pressure
Pump	
Type	Interpump W2030
Flow	30 Lpm
Pressure	200 Bar
Lubrication	Oil splash type
Speed	1450 Rpm
Drive	Via 2:1 reduction gearbox
Engine	
Type	Twin Cyl. Lombardini 25LD425
Power	19 Hp
Fuel tank Cap.	6 Litres
Lubrication	Gear pump / Oil cooler
Cooling	Forced air system
Fuel system	Direct injection - auto bleeding
Starting System	Electric with 12V charging system

Engine

- Lombardini air-cooled 19 Hp twin cylinder diesel
- Electric start with charging system
- Maintenance free pure lead dry battery
- Selectable throttle mode: manual or automatic
- Electronic hour clock
- Integrated oil cooler

Pump

- Triplex Interpump 66 Series
- Ceramic plungers & brass manifold
- Gearbox driven at 1450 Rpm
- Adjustable pressure regulating valve
- Independent return to tank by-pass

Safety

- Factory set pressure relief valve
- Wheel brake with spring loaded lock
- Four frame lifting point eyes
- Complies with CE noise regulations

Equipment

- 10 metre high-pressure hose
- Manual hose reel with 40 metre capacity
- Single lance with high-low pressure facility
- Low-pressure chemical induction
- Twin high-pressure outlet ports
- 4 metre anti-kink suction hose with weighted filter