




# Wheel Guide 76 & 90 1500mm or 2000mm Galvanised or Galvanised & Colour

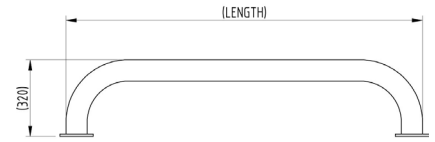

The AUTOPA Wheel Guide is ideal for providing guidance for reversing vehicles in loading bays. The Wheel Guide is available in 76mm, 90mm, 139mm and 168mm outside diameter mild steel galvanised tube which can be coated yellow to increase visibility. The Wheel Guide is available in two lengths, 1500mm or 2000mm.

All products in the range are galvanised mild steel, ensuring their longevity and are designed to take the knocks and bumps that occur in the warehouse and factory environment. The Wheel Guide is also suitable for us as a low level protection rail.

<u>Part Number</u>	<u>Description</u>	<u>Weight (kg)</u>
138 177 920	76mm x 1500mm Galvanised	12kg
138 177 921	76mm x 1500mm Galvanised & Yellow	12kg
138 177 930	90mm x 1500mm Galvanised	14kg
138 177 931	90mm x 1500mm Galvanised & Yellow	14kg
138 177 925	76mm x 2000mm Galvanised	15kg
138 177 926	76mm x 2000mm Galvanised & Yellow	15kg
138 177 935	90mm x 2000mm Galvanised	17kg
138 177 936	90mm x 2000mm Galvanised & Yellow	17kg

## Product details

- Available bolt down only
- Square flange plate – 140mm sq x 10mm
- 8 x 12mm bolts required per wheel guide
- 320mm height
- 3mm wall thickness

## Installation & use

Bolt down to a suitable concrete surface.  
Telescopic, removable and concrete in are supplied with welded fixing spikes to ensure firm ground anchorage into concrete.  
Telescopic, removable and concrete in require a suitable excavated hole for installing into concrete.  
Products are guaranteed for 12 months (if installed and used correctly).



[www.autopa.co.uk](http://www.autopa.co.uk)  
+44 (0)1788 550556

AUTOPA Limited  
Cottage Leap, Rugby, Warwickshire CV21 3XP

