


Pressure Swing Dryers

Pressure Swing dryers provide a source of very dry compressed air for use as a zero gas in humidity calibration systems, or for general laboratory applications.

PSD2 & PSD4 Pressure Swing Dryers



Dimensions - PSD2

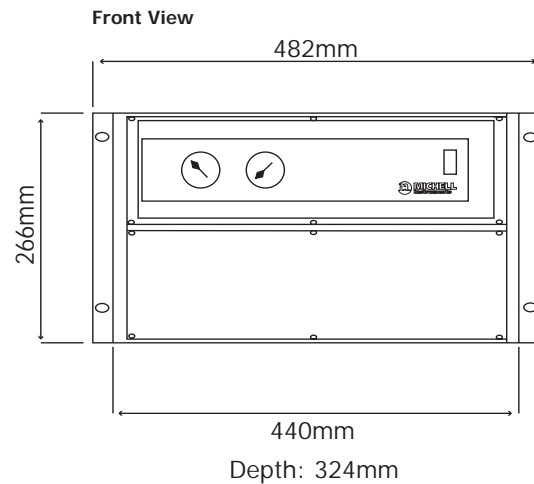

The Michell PSD Series Pressure Swing Dryers use two columns filled with 4Å molecular sieve desiccant, which are used alternately on a two-minute switching cycle. The PSD dryers are designed to operate continuously, using a small proportion of the dried air, to regenerate the offline column - generally giving desiccant life in excess of five years. This type of heatless regeneration also uses significantly less energy than a 'heated' type of dryer.


The PSD2 is fitted with inlet and outlet pressure regulation, and delivers up to 7 NI/min (14.8 scfh) of dry air at 1ppm_v or better.

The PSD4 is supplied with stainless steel internals and larger volume desiccant columns. These factors, combined with high integrity VCR couplings, deliver an output of up to 90 NI/min (optional) at better than 13ppb_v.

Highlights

- Excellent long term stability
- Maintenance free except for a desiccant change once every 5 years
- Completely self-contained
- Low power consumption

Dimensions - PSD4

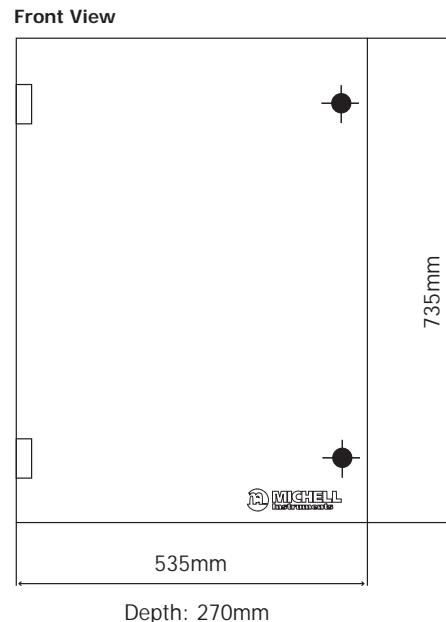

Issue No: PSD2 and PSD4_97160_V3_UK_0517

Please note: Michell Instruments adopts a continuous development program which sometimes necessitates specification changes without notice. Please contact us for latest version.

Pressure Swing Dryers

Technical Specifications

Model	PSD2	PSD4-STD (Standard)	PSD4-HFV (High flow volume)	PSD4-HPO (High pressure output)
Performance				
Gas output				
Flow	7 NI/min (14.8 scfh)	30 NI/min (63.6 scfh)	90 NI/min (109.7 scfh)	30 NI/min (63.6 scfh)
Pressure	0.5 barg (7 psig)		User-settable up 8 barg (116 psig)	
Moisture content	<1ppm _v		<13ppb _v	
Input Requirements				
Gas supply				
Flow	10 NI/min (21.2 scfh)	30 NI/min (63.6 scfh)	90 NI/min (109.7 scfh)	30 NI/min (63.6 scfh)
Pressure	5 to 7 barg (70 to 100 psig)		6 to 10 barg (87 to 145 psig)	
Moisture content	Oil and liquid water-free		<16ppm _v	
Electrical Input				
Power	100 to 115 OR 220 to 240 VAC, 50/60Hz			
Power connection	IEC (3 pin female c13) input socket			
Environmental Conditions				
Operating temperature	+5 to +35°C (+41 to +95°F)		+10 to +40°C (+50 to +104°F)	
Storage temperature	-40 to +35°C (-40 to +95°F)		-40 to +50°C (-40 to +122°F)	
Mechanical Specifications				
Type	Twin column desiccant, pressure swing			
Desiccant	4 Ångström Molecular sieve bead (4-8 mesh)			
Timer	Motorized cam			
Gas connections				
Inlet	Swagelok® ¼"		¼" VCR Swagelok®	
Outlet	Swagelok® ¼"	¼" VCR Swagelok®	½" VCR Swagelok®	¼" VCR Swagelok®
Filters				
Outlet	None	Millipore Wafergard IIF Micro Inline (sealed type) with PTFE membrane element rated at >99.999% retention of 0.003µm particles		
Vent	None	Bonded glass microfiber rated at >99.999% retention of 0.1µm particles		
Construction	Rack mount: 19" x 6U x 324mm (12.8")		GRP wall mounting enclosure: 735 x 535 x 270mm (29 x 21 x 10.5")	
Weight	12.5kg (27.5lbs)	25kg (55lbs)	30kg (66lbs)	26kg (57lbs)

Please note: Michell Instruments adopts a continuous development program which sometimes necessitates specification changes without notice. Please contact us for latest version.