
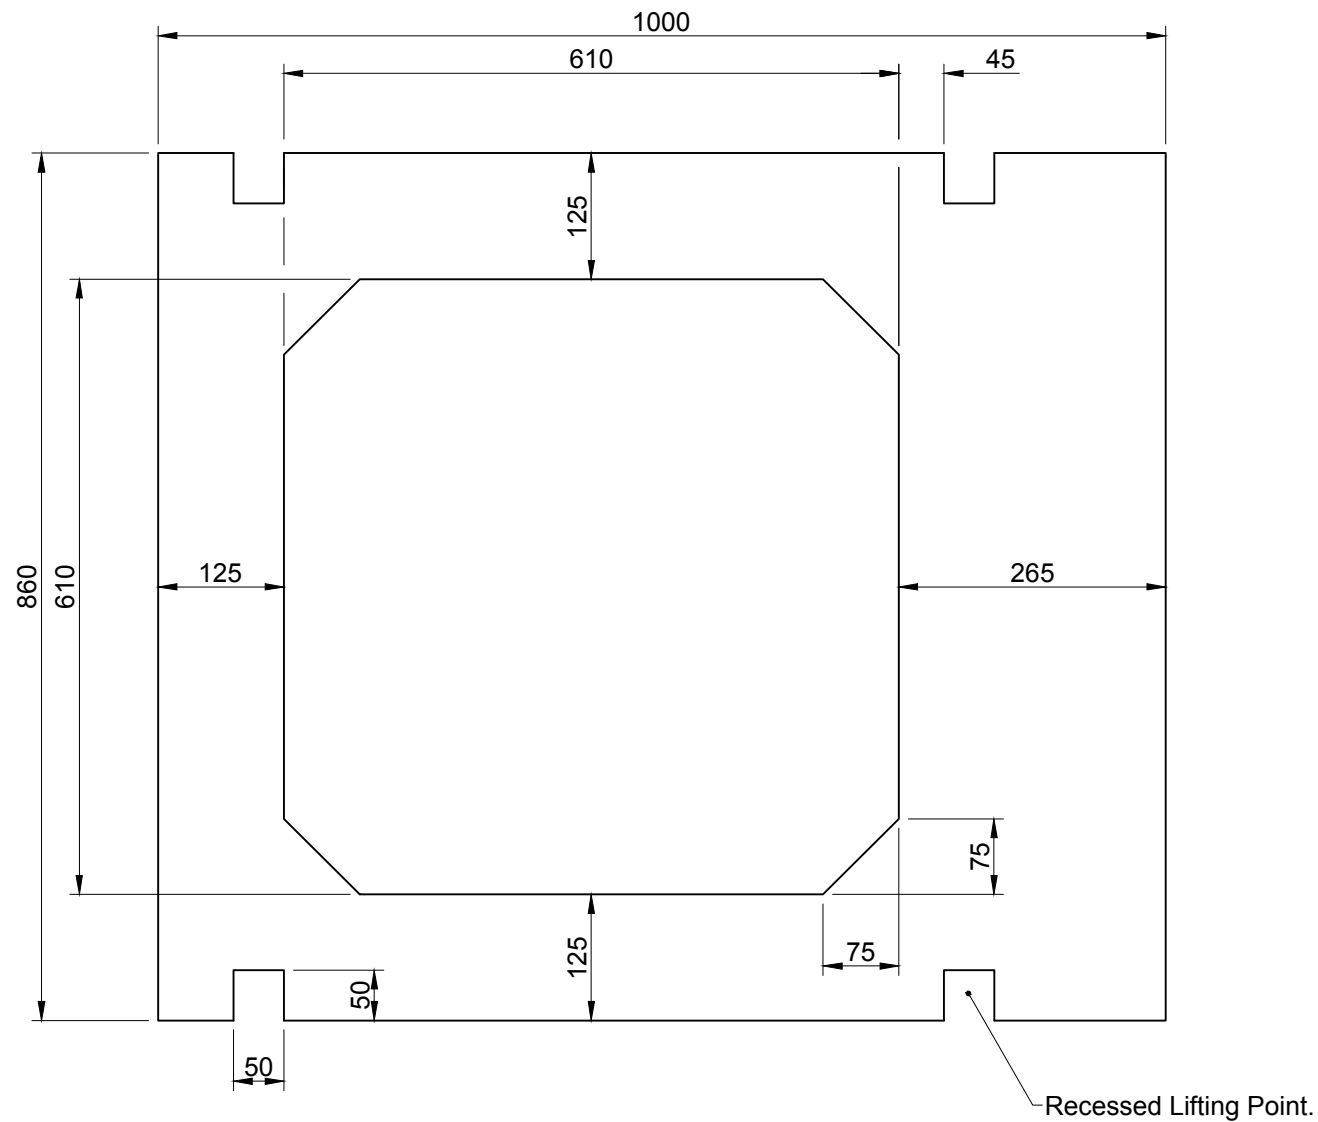
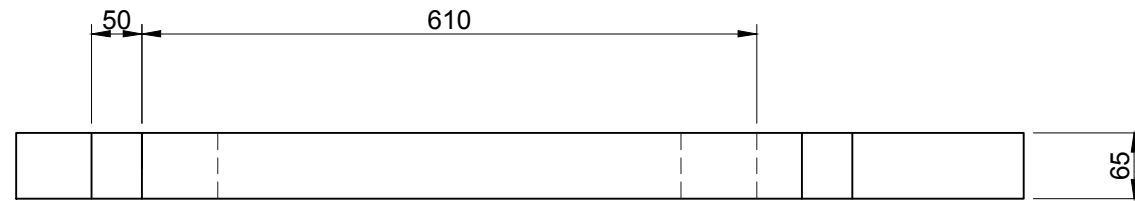


PROJECTION



Recessed Lifting Point.

Notes


Tolerances to BS EN 1917 & BS 5911 part 3

Minimum cover = 25mm

Weight = 78 Kg

Thickness = 65mm

Reinforcement shall comply with the requirements of BS 4449-2005. Minimum yield strength 500MPa & BS4482

					A	06.03.14	Notes Added & Title Block Updated.	CTC	RD
					O	08.03.10	For Information	CTC	RD
REV	DATE	REASON FOR ISSUE	DRN	APP	REV	DATE	REASON FOR ISSUE	DRN	APP
TITLE :					ELITE PRECAST CONCRETE LIMITED				
Eccentric Seating Ring / Corbel Slab					HALESFIELD 9, TELFORD				
(CPM Type) 600 x 600					SHROPSHIRE TF7 4QW				
Elite Product Code : -									
DRN :	CTC	CHKD :	RD	DATE :	08-03-10	DRG SIZE :	A3	SCALE :	1:7.5
				DRG	015	REV	A		