



Compact Cassette Awning




S BRACCIO S ARM S BRAS S ARM S BRAZO	COMPACT	
	S	L MIN
150	173	193
200	223	249
250	273	297

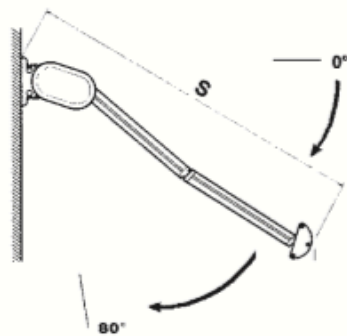

MOTORIZZATA
L min = - 3 cm

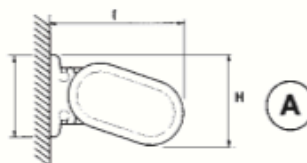

PARETE / WALL/
PAROI/WAND / PARED
A l= 16,5 Min., 23,5 Max.
H= 12 Min., 20 Max.

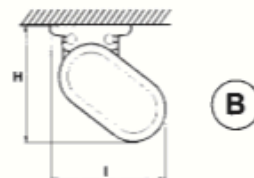

SOFFITTO / CEILING/ PLAFOND
DECKE / TECHO
B l= 12 Min., 20 Max.
H= 16,5 Min., 23,5 Max.

Compact Cassette Awning



Front view



Opening

Compact Cassette Awning

Technical features

Maximum Dimensions


To cover an area of 480 x 273 cm

Operating System

Can be manual with a handle or tubular motor with a switch

Framework Colour

White colour RAL 9016 as standard,
Special powder coating available in other RAL
colours (price increase)

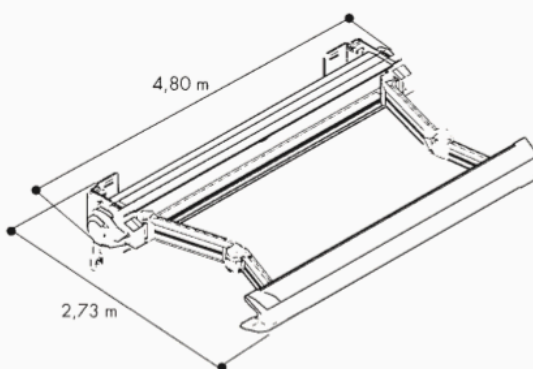

AWNING'S MAXIMUM DIMENSIONS -

Larghezza Tenda Width Largeur Breite in m Ancho Toldo	N. Bracci Nr. of Arms N. Bras Gelenkarme N. Brazos	N. Supporti Nr. of Supports N. Support Träger N. Soportes	ø Rullo Avvolgitore ø Take up Roller ø Ruleau ø Tuchwelle ø Rodillo de Arrolamiento
193 → 480	2	2	7 (12/10)

Ceiling fitting



Wall fitting



Manual operating

