


IT'S HERE

FAST 6%

Range 153 - 937 mm (6" - 36")

The new FAST 6 36 is the latest radical innovation from GBC. It has a revolutionary self-centring system. Set up time is reduced and production time increased. The **FAST 6_36** pipe cutting and bevelling machine utilises the same split frame design as the popular MCA range for ease of positioning.



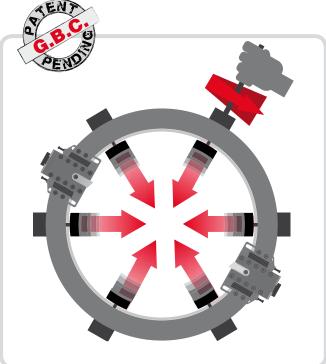

The **FAST 6 36**, is available in three different pneumatic motorizations (electric, hydraulic), and in its standard equipment also lists two copier tool holders for the compensation of eventual irregularities caused by ovalization of the pipe.




Copier toolbox



High resistance clamping pad

FAST 6 %

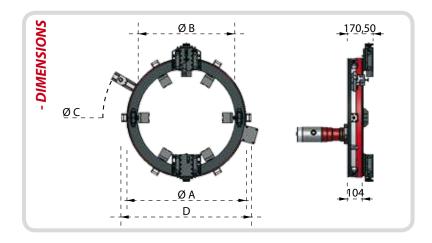

RANGE	DIMEN:	DIMENSIONS (mm)						
	ØA	ØB	ØC	D				
06" - 12"	515	370	860	580				
12" - 18"	665	520	1010	730				
18" - 24"	815	670	1160	880				
24" - 30"	965	820	1310	1030				
30" - 36"	1115	970	1460	1180				

TECHNICAL FEATURES		Pneu.	Elec.	Hyd.
Motor Power	hp W	3 2200		15 11025
Air Consumption	L/min <i>cfm</i>	3000 100/110		
Working Pressure	Bar <i>psi</i>	6 90		100 1500
Electric Motor Power	HP <i>W</i>		1,33 1020	
Power Supply (Frequency)	V (Hz)		230 (50/60)	
Working Power	HP <i>W</i>			8 5880
Oil Flow	Lt/min			40
Tool Holders Stroke	mm inch		60 2,36	
Tool Radial Feeding	mm inch		0,075 0,003	
Machine Idle Speed	rpm		23	
Weight	Kg Ibs		90 ÷ 145	
Acoustic Emissions	dB		75 ÷ 78	