01844 201555

HEXSAW

HEAT EXCHANGER CUTTING BANDSAW

The HEXSAW replaces the slow flame cutting process, elimates pollution and the danger of gas combustion.

Use of the HEXSAW makes removing tube stubs from the tube plate a much easier task.


The HEXSAW improves productivity and removes a bottleneck in the heat exchanger refurbishment process.

Manufactured in the EU to EC standards.

	HECB 2000	HECB 3000
Ømax. (mm)	2000	3000
☐length (mm)	700	800
min. (mm)	300	1000
m/min.	15 - 105	15 - 105
<u></u> h	600	700
	8670 x 54 x 1,6	10670 x 54 x 1,6
Kw.	12 Kw	15 Kw
Kg.	8000	12000
cm.	5200x3600x2400	6200x4800x2600



HYDRAULIC BANDSAW

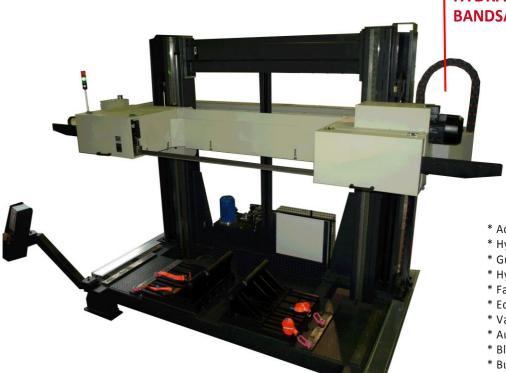

- * Adjustable speed and cutting pressure
- * Hydraulic positioning of arms
- * Guiding of head by linea guides
- * Hydraulic blade tensioning
- * Fast lift head
- * Ecological coolant device (mist coolant)
- * Variable blade speed from 15 to 105 m/min
- * Automatic stop at end of cut
- * Blade cleaning brush
- * Built according to EC standards


HEAT EXCHANGER CUTTING BANDSAW



- * Independant feed and pressure regulator with manual control of cut according to section and hardness of material
- * Automatic arm adjustment control (optional)



- * B & R CNC
- * Alarm control
- * Cutting statistics: Counter, blades, times, ...







- * Adjustable clamps for different diameters * Material clamping through slings * Laser drop control (optional)