


SUPERMAXI 4-16

Range Ø 94.5– 418.0mm (3.7”-16.0”)

New generation machine equipped with an innovative 6 points of contact locking system able to grant stability and absence of vibrations during the operations.

The installation and centering are extremely easy, precise and functional.

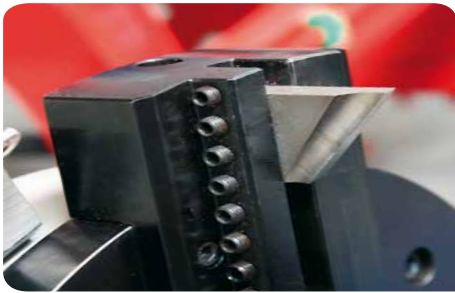

The unit is equipped with easily interchangeable tools for any angle of bevel which come in various hardness scales in relation to the material typology:

- 8% cobalt
- titanium coated
- tip of hard metal



SUPERMAXI 4-16



		<i>PNEUMATIC</i>	<i>HYDRAULIC</i>	<i>ELECTRIC</i>
<i>locking range</i>	mm inches	94.5 - 418.0 3,72 - 16.0	94.5 - 418.0 3,72 - 16.0	94.5 - 418.0 3,72 - 16.0
<i>no-load speed</i>	rpm	19	18	17
<i>axial stroke</i>	mm inches	50 1,97	50 1,97	50 1,97
<i>pneumatic motor power</i>	hp w	3 2200	-	-
<i>air consumption</i>	l/min cfm	1800 63.56	-	-
<i>air pressure</i>	bar psi	6 87,02	-	-
<i>air connection</i>	inches	3/4"	-	-
<i>hydraulic motor power</i>	hp w	-	6,8 5000	-
<i>max operating pressure</i>	bar psi	-	100 1450	-
<i>erogation oil</i>	l/min cfm	-	30 1,06	-
<i>electric motor power</i>	hp w	-	-	2,95 2200
<i>/tension</i>	volt	-	-	110/220
<i>/frequency</i>	hz	-	-	50
<i>max acoustic emission</i>	db	75	75	75
<i>machine weight</i>	Kg	80	80	80
<i>machine "A" ø</i>	mm	330 (426 opt)	330 (426 opt)	330 (426 opt)
<i>machine "B" ø</i>	mm	365 (475opt)	365 (475opt)	365 (475opt)
<i>machine "C" Length</i>	mm	750	610	630

