

SUPERMAXI 7-24

Range Ø 180-590 mm (7,08" – 24")



New generation machine equipped with an innovative 6 points of contact locking system able to grant stability and absence of vibrations during the operations.





The installation and centering are extremely easy, precise and functional.



The unit is equipped with easily interchangeable tools for any angle of bevel which come in various hardness scales in relation to the material typology:

- 8% cobalt
- titanium coated
- tip of hard metal

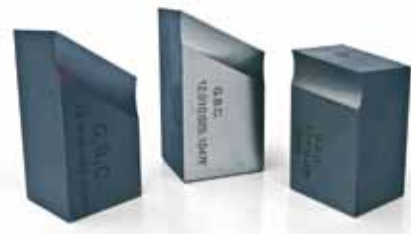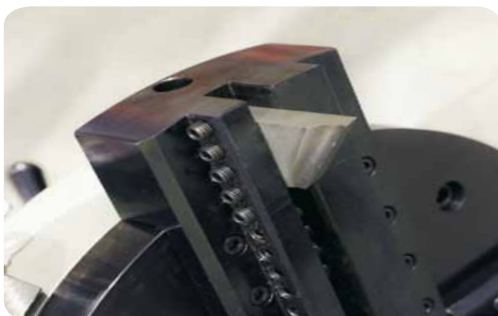

SUPERMAXI 7-24



		PNEUMATIC	HYDRAULIC	ELECTRIC
<i>locking Range</i>	mm inches	180-590 7,08-19,84	180-590 7,08-19,84	180-590 7,08-19,84
<i>idle speed</i>	rpm	11	15	18
<i>axial stroke</i>	mm inches	50 1,96	50 1,96	50 1,96
<i>pneumatic motor power</i>	hp w	4 2940	-	-
<i>air consumption</i>	l/min cfm	2690 95	-	-
<i>air pressure</i>	bar psi	6 90	-	-
<i>air hose connection</i>	pollici inches	3/4"	-	-
<i>hydraulic motor power</i>	hp w	-	6,8 5000	-
<i>max oil pressure</i>	bar psi	-	100 1450	-
<i>oil flow rate</i>	l/min gpm	-	30 7,8	-
<i>electric motor power</i>	hp w	-	-	3,2 2400
<i>voltage</i>	volt	-	-	110 / 220
<i>frequency</i>	hz	-	-	50 / 60
<i>max acoustic emission</i>	db	75	75	75
<i>machine weight</i>	kgs	245	245	245
<i>machine "A" ø</i>	mm inches	630 24,80	630 24,80	630 24,80
<i>machine "B" Length</i>	mm inches	880 34,64	830 32,68	800 31,5

We guarantee we have successfully passed the electric and immunity safety test, internal tests, and to be compliant with the European Norms in force.

