



Best performance for your lab.



**Professional  
High-Performance  
Fluoroplastic Labware**

PTFE | PFA | FEP

EDITION  
E700

All information in our catalogue E700 is based on our current technical knowledge and experience as well as on available literature and data provided by the manufacturers of the raw materials and semi-finished products used. BOHLENDER does not take any responsibility on the currentness, accuracy and the completeness of the data and information provided.

Generally, BOHLENDER cannot be held liable for any claims for material and/or non-material damages caused by the use or not-use of the provided information respectively by using incomplete or incorrect data except BOHLENDER can be blamed for negligence or culpable negligence.

It is the user's task to check the suitability of our products and the used material for his special application. Properties or possible applications cannot be derived neither express nor implied from the descriptions and data in this catalogue.

This catalogue and all products are subject to modifications and amendments without prior notice.

All specifications regarding pressure refer to an utilisation at +20 °C. Diminutions have to be considered for deviating temperature conditions.

All specifications on the thermal resistance refer to the used raw material, respectively to the lowest common working temperature if the final product is made of different materials.

The following are the registered trademarks of the respective organisations:

Chemraz®	by Greene Tweed	Lemo®	by Lemo
Halar®	by DuPont	Prominent®	by Prominent Dosiertechnik
Hastelloy®	by Haynes International	Tygon®	by Saint Gobain
Kalrez®	by DuPont	Viton®	by DuPont



New products are shown with this icon.



The FDA icon means that all parts coming into contact with the fluid are from materials that correspond to FDA requirements. A certificate of conformity is included with each shipment.



Volume/Quantity discount available.



Our best-sellers



These products are conform to the CE regulations. A certificate is supplied with our operating instructions upon delivery.

Copyright BOHLENDER GmbH. All rights reserved. Copies of this catalogue, in whole or in parts are only permitted with BOHLENDER GmbH's prior written consent. The pictured persons and their statements in our testimonials are fictitious provided we do not state the person's name and organisation.

**Dear Customers and Partners,**

I am happy to present you the latest edition of the BOLA catalogue.

Besides our successful best-sellers and classics it includes also many new developed or enhanced products that enlarge our product range.

You will find all our novelties in the attached flyer. We now offer an enlarged choice of products for protection against static charging which can be found in a separate chapter.

Completely new products like our screw joint system for reactor lids and the components for Tri-Clamp connections complement our current delivery programme. And of course, our experts give again additional advice with helpful practical tips as well as further technical information in the appendix at the end of this catalogue.

We are looking forward to meet your special ideas and requirements. As a manufacturer, we are able to offer custom made products as per your specification. This is easier than you may expect - already starting with 1 piece.

Our experts are keen to manage your challenges!

Best regards,

A handwritten signature in blue ink, appearing to read 'V. Bohlender'.

Volker Bohlender

Managing Director

BOLA stands for well-proven, sophisticated and nearly indestructible labware made of high-performance plastics.

Developed by our specialists, manufactured in-house.

With accuracy and attention to detail.

On request even custom made.

**Welcome to BOLA!**



# What you should know about BOLA



6

FREQUENTLY ASKED QUESTIONS

1

## Why shall I use Labware made of high-performance plastics?

Fluoroplastics such as PTFE and other offer unique properties such as universal chemical resistance, unbreakable, easy to clean, can be sterilized....ideal for the work in the lab!

2

## What kind of products can I expect here?

E. g. stirrer shafts, screw joints, tubing, ground joint components, and many more. Optimally adapted to the needs in chemistry, pharmacy and industry.

3

## What makes BOLA and BOLA products particular?

The fabrication in-house permits constantly high quality. We know our customers' business and answer fast to new requirements.

4

## Where and how do you manufacture the products?

At our headquarters in Grünsfeld, Southern Germany. Experienced staff and modern production technology are the key for progressive products.

5

## Who stands behind BOLA?

BOLA stands for Bohlender lab equipment – family operated in second generation by Volker Bohlender. Team spirit and fairness are practised at BOLA.



6

### **Can I get customized products as well?**

Of course – your special requirements are welcome! No matter if you need a modification or a completely new item: Just provide a simple sketch and we produce to your requirements!

7

### **How do you get the BOLA products?**

You place your order by fax, phone, letter, e-mail or in our online shop. Orders are executed by our distributors for labware. General lead times: 1 working day within Germany, 3-5 working days within the EU.

8

### **What happens if I should not be happy with the product?**

Give us a call, send a fax or drop an e-mail. We take immediately care of your request and will arrange either a fast exchange or rework. It can be necessary to return the product for further examination.

9

### **Where can I get more information?**

See our homepage [www.bola.de](http://www.bola.de) or ask for our regular e-mail newsletter for latest information on our products

10

### **Are there any discounts...?**

Good question: For bulk orders we grant discounts and special prices (except for customized items). Please contact us.

# Content



## 10 COMPANY

## 17 STIRRING AND MIXING

- 20 Stirrer Shafts, Stirrer Couplings
- 33 Stirrer Blades » 38 Stirrer Bearings » 42 Magnetic Stirrer Heads
- 43 Magnetic Stirrer Couplings
- 48 Stirrer Blades » 51 Magnetic Stirring Bars » 65 Culture Bottles

## 67 SCREW JOINTS AND COMPONENTS WITH GL THREAD

- 71 Laboratory Screw Joints
- 76 Multiple Distributors for Bottles
- 84 Distributors for Reaction Vessels
- 88 Distributors for Canisters
- 90 Distributors for Barrels
- 96 Screw Caps » 99 Gaskets, Screw Thread Adaptor Couplings » 106 Tube Fittings » 110 Stopcocks and Valves
- 114 Hose Connectors

## 117 SCREW JOINTS / COMPONENTS FOR EX-PROTECTION

- 119 Laboratory Screw Joints EX
- 126 Tubing EX » 128 Stirrer Shafts EX » 129 Temperature Probes EX
- 130 Reactor Lids EX

## 137 SCREW JOINTS FOR PRESSURE UP TO 5 BAR

- 138 Tube Fittings » 142 Stopcocks and Valves » 146 Hose Connectors

## 149 TUBING, FILMS, TILES

- 150 Tubing » 162 Tiles, Films
- 164 Sealing Accessories
- 167 Screws, Balls, Boiling Stones

## 171 GROUND JOINT COMPONENTS

- 172 Sleeves » 175 Bellows
- 176 Stoppers » 180 O-Rings
- 181 Tri Clamp Fittings





## 185 TEMPERATURE MEASUREMENT

- 189 Temperature Probes
- 192 Immersion Probes
- 198 Adaptors for Temperature Probes

## 199 VESSELS AND DISTILLATION EQUIPMENT

- 200 Scrubber Bottles and Columns
- 201 Bottles » 203 Round Bottom Flasks » 205 Jars » 207 Beakers
- 209 Dishes » 212 Test Tubes, Centrifuge Tubes » 215 Digestion Vessels for Microwave Ovens
- 218 Reactor Lids » 226 Distillation Apparatus

## 237 SCREW JOINTS FOR HPLC

- 238 Distributors » 242 Flanged Tubing
- 243 Couplings and Stopcocks
- 245 Pressure Relief Valves
- 248 Tube End Fittings and Thermoelectric Flanging Tools
- 252 Fittings, Screw Joints

## 257 FILTRATION

- 259 Scrubber Adaptors and Gas Distributors » 262 Filters
- 267 Filtering Membranes, Discs and Tiles

## 269 PUMPS

- 270 Cordless Pumps
- 272 Micro Magnet for Glass Pumps

## 273 TECHNICAL INFORMATION

- 274 Materials » 279 Chemical resistance » 281 Physical Properties » 282 Cleaning, Heating, Safety » 284 Tubing
- 290 Stirrer Shafts » 293 Magnetic Stirring » 294 Determination of Threads » 298 Our Commitment

# BOLA – Best performance for your lab.

10



## More flexibility.



Having design and production in house makes it possible to realise your requirements efficiently. We are open to any special requests. Please send us a drawing or sketch and our design department will start work.

## More service.



Some enquiries are urgent. We are well prepared and keep the majority of our extensive product range in stock. Our efficient, well-established workflow assures shipment of your order at short notice. Waiting times and unnecessary shut downs can be prevented. You have no time to lose? We are here to help.

## More expertise.



Each of our products has been designed by ourselves, thoroughly tried and tested as well as continuously improved and adapted to your everyday needs. Should you have any questions or requests, our professionals will give you expert advice.



## Our **quality** commitment

BOLA products are manufactured in-house and are made of high-performance plastics with best material properties. We thoroughly control the quality of the raw materials.

Production is exclusively made by experienced and qualified staff at our headquarters in Grünsfeld, Southern Germany.

During the complete manufacturing process we strictly observe the standards of DIN EN ISO 9001.

As to products marked as FDA conform, we assure that all parts coming into contact with the medium are made of materials that correspond to FDA requirements.

All employees and I guarantee for the high quality of the complete range of BOLA products.

Thank you for your trust.

Volker Bohlender

Managing Director



Grünsfeld, April 2016



# Made to measure.

12



## BOLA offers custom manufacture.

Every lab is different. By offering an extensive range of established and sophisticated standard solutions, we take into account the varied requirements of the respective branches and sectors.

But maybe you are looking for something special? Something that is not included in our standard product range?

In that case we are able to offer an individual custom manufacture. This is easier and faster than you may expect. Discuss your idea with our professionals. They will give advise and support during design. Finally, your idea will become real: We produce as per your requirements and in compliance with the chosen raw materials – already from 1 piece.

We only need a drawing (a sketch is sufficient) and some further information


### » You have a special request?

Give us a call: +49 (0) 93 46-92 86-0.

Or complete the attached form for custom enquiries including your contact details and return it by fax. We will be in touch to discuss details and provide you with a free quotation.

### Checklist for your custom product.

- » Please describe the product required.
- » What is the application?
- » Which are the critical dimensions and tolerances?
- » Please specify material requirements.
- » Please specify the operating temperature range.
- » What is the chemical load?
- » Please state quantities?
- » What is the budgetary price range per piece?



This icon marks products which are especially suitable for individual modification.

## Standard plus: our modifications...

The BOLA range already offers a huge choice of products and a wide range of accessories for different applications. Moreover, we offer you to adapt our standard products according to your requirements. Sometimes it is only a small detail that has to be modified or added - such as another thread size or a smaller bore diameter.

Your benefit is an individual product as well as fast availability due to short-term realization of the modification. And what is your special request? We will be pleased to assist you: Just give us a call **+49 (0) 9346 9286-0** or send us the enclosed „Made to measure“ form by fax.

Standard


Modification



Additional sealing: The o-ring provides better sealing and strong seating in the ground joint cone.



Belly-shaped bottles provide additional capacity. At the same time, the dimensions of the lid remain unchanged so that existing equipment can be used for filling and emptying.

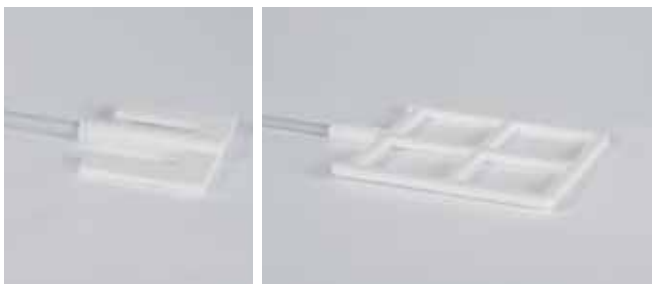

A standard U-shaped blade has been enlarged to a window-shaped blade for improved mixing.



Female, male or vice versa? We are able to offer a counterpart to all our standard components, no matter whether you need a thread or a ground joint to be modified.





## » One contact person for all your questions.

Highly qualified staff and continuous product training assure professional consultancy also for technical problems.

## » Fast and reliable delivery.

Our modern production technology combined with optimised processes from production planning up to despatch assure a fast execution of your order.

## » Accuracy is our passion.

We have great experience in all kind of processing of fluoroplastics in house. Continuous quality assurance from choosing suitable raw materials and throughout the whole manufacturing process.

## » Everything for the modern lab.

Extensive range of lab equipment to meet the requirements of modern labs for nearly every application.

## » Virtually all your desires will be fulfilled.

We can make products to your specification starting with 1 piece up to large-scale production. A sketch or drawing is sufficient. Reproducibility is assured by accurate technical documentation.

## » We understand your requirements.

Many years of experience with processing of fluoroplastics.





# Stirring and Mixing



Magnetic stirring bars and stirrer shafts have to feature many different qualities since they are used with many different products and in different vessels. The comprehensive BOLA range is offering the best possible solution – if not, we will manufacture according to your specifications.

## PRODUCT TIPS



Page 51  
Magnetic Stirring Bars



Page 18  
Stirrer Shaft



Page 43  
Stirrer Coupling

## BOLA Stirrer Shafts



### What you should know about BOLA Stirrer Shafts

BOLA Stirrer Shafts consist of a PTFE-jacketed stainless steel shaft and a stirrer blade made of solid PTFE. The stainless steel core provides high mechanical stability and allows a safe fixing in the agitator.

#### Unbreakable

All glass stirrer shafts which are commonly used in laboratories are very fragile. Dropping, stirring solid materials or too much power transmitted from the agitator to the product can cause broken glass. Due to their solid stainless steel core, BOLA Stirrer Shafts are protected against all these possibilities of breaking.

#### Universal chemical resistance

Due to the thick PTFE-jacket, the product which is stirred is only exposed to PTFE. This assures an almost universal chemical resistance. PTFE-jacketed stirrer shafts can be used whenever stirrer shafts made of PP (polypropylene), glass or stainless steel are not sufficient.

#### Temperature resistance

Stirrer shafts made of PP (polypropylene) are deformed at temperatures exceeding +100°C and cannot be used any longer. All BOLA PTFE-jacketed stirrer shafts can be used at temperatures of up to +250°C without any negative effects on their chemical resistance.

#### Non-adhesive

The surfaces of glass and stainless steel stirrer shafts allow adhesion of products (in particular such as dyes and glues). BOLA PTFE Stirrer Shafts, however, are non-adhesive and therefore eliminate adhesion of dyes and glues.

#### Interchangeability

At present, most stirrer shafts used in laboratories are made of glass. All BOLA Stirrer Shafts are available with the same diameters, lengths and surface qualities (KPG) as stirrer shafts made of glass. Thus, the user can easily replace the glass stirrer shaft with a PTFE-jacketed stirrer shaft and does not have to change agitators, couplings and guiding devices.

#### Safe fixing

The upper end of the BOLA Stirrer Shaft is not jacketed with PTFE and can therefore be fixed safely into the agitator or the stirrer coupling.

#### Solid stirrer blade

The stirrer blade is fixed tightly to the stirrer shaft and cannot be loosened by the product which is still turning after switching off the agitator. The stirrer shafts are suitable for clockwise and counterclockwise rotation.





### Frequently asked: Why don't you coat stirrer shafts?

Coating with PTFE only provides a thin plastic layer. This layer can be damaged very easily by aggressive products, friction or rough handling during storage. A possible consequence is that parts of the layer are peeled off.



**The BOLA solution:** A solid PTFE jacket together with solid stirrer blades. BOLA Stirrer Shafts provide a long durability and an excellent mechanical resistance.

### Results of stirring – tested for you

In order to help you choose the suitable stirrer shaft for your application, we have made tests with typical data. These graphs shall give you an indication for the stirring effects of the BOLA Stirrer Shafts.

- » Speed: 500 rpm
- » Volume: 2.000 ml
- » Product: water
- » Temperature: 20°C
- » Vessel: glass beaker



### Suitable chucking diameter of stirrer shafts

Very long stirrer shafts need to have suitable diameters to be stable enough. All BOLA Stirrer Shafts have adequate diameters and lengths. If the chucking diameter of a stirrer shaft is too big, it can mostly be reduced by machining. This machining has to be made totally self-centring to avoid eccentricity of the stirrer shaft.

Please contact us if you need a reduced chucking diameter (see page 36).



## BOLA Propeller Stirrer Shafts

**BESTSELLER**

Material: PTFE      Temperature resistance: from -200 °C to +250 °C      Chemical resistance: +++ universal      Stirring effect: bottom-up

Product description:



PTFE-jacketed stainless steel shaft, propeller completely made of PTFE with three 45° angled round or angular blades. Universal chemical resistance since the product is only exposed to PTFE.

FDA conform

	Length mm	Shaft dia. mm	Chucking dia. mm	Dimensions according to drawing			Cat. No.:
				A	B	C mm	
<b>A</b>	250	6	4	50	18	1,5	C 378-04
	350	6	4	50	18	1,5	C 378-06
	450	6	4	50	18	1,5	C 378-08
<b>B</b>	350	8	6,5	75	18	3,0	C 378-12
	450	8	6,5	75	18	3,0	C 378-14
	600	8	6,5	75	18	3,0	C 378-16
	450	10	8,0	50	18	3,0	C 378-17
	450	10	8,0	75	18	3,0	C 378-18
	600	10	8,0	75	18	3,0	C 378-20
	800	10	8,0	75	18	3,0	C 378-22

Applications:

The product is sucked bottom-up, good axial flow with low shear force.

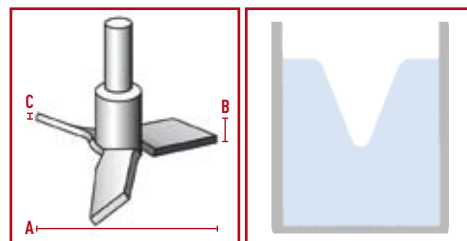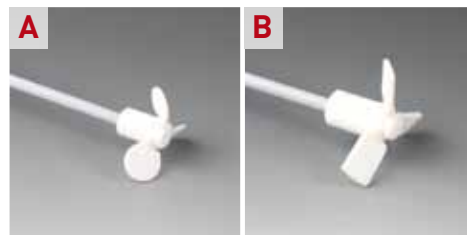

**NEW**

## BOLA Moon-Shaped Stirrer Shafts

Material: PTFE      Temperature resistance: from -200 °C to +250 °C      Chemical resistance: +++ universal

Product description:


PTFE-jacketed stainless steel shaft, tilting half-moon stirrer blade with double-sided groove and access for the stirrer shaft completely made of PTFE. Universal chemical resistance since the product is only exposed to PTFE.

FDA conform

	Length mm	Shaft dia. mm	Chucking dia. mm	For ground joint NS	Dimensions according to drawing			Cat. No.:
					A	B	C mm	
	350	8	6,5	24/29	65	18	3	C 376-02
	450	8	6,5	24/29	65	18	3	C 376-04
	350	8	6,5	29/32	90	24	3	C 376-06
	450	8	6,5	29/32	90	24	3	C 376-08
	600	8	6,5	29/32	90	24	3	C 376-10
<b>NEW</b>	450	8	6,5	45/40	125	35	3	C 376-54
<b>NEW</b>	800	8	6,5	45/40	125	35	3	C 376-58
	350	10	8,0	29/32	90	24	3	C 376-12
	450	10	8,0	29/32	90	24	3	C 376-14
<b>NEW</b>	450	10	8,0	45/40	125	35	3	C 376-64
	510	10	8,0	29/32	90	24	3	C 376-16
	600	10	8,0	29/32	90	24	3	C 376-18
<b>NEW</b>	800	10	8,0	45/40	125	35	3	C 376-68
	1.000	10	8,0	29/32	90	24	3	C 376-19
	600	16	14,0	45/40	125	35	3	C 376-20
	800	16	14,0	45/40	125	35	3	C 376-22

Applications:

Tangential flow with little turbulence. The tilting half-moon blade is ideal for stirring in round-bottom flasks with ground joint necks. Blades (see Cat. No. C 400-... on page 49) are available separately and can be mounted additionally.

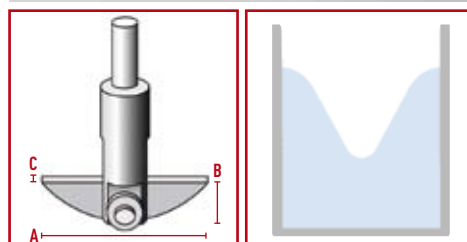

**NEW**

**NEW**

**NEW**

**NEW**



**HELPFUL: page 128**  
Stirrer shafts made of static dissipative PTFE-EX

## BOLA Double-Moon-Shaped Stirrer Shafts

Material: PTFE Temperature resistance: from -200 °C to +250 °C Chemical resistance: +++ universal

Product description:


PTFE-jacketed stainless steel shaft, two each tilting half-moon stirrer blades with double-sided groove and access for the stirrer shaft completely made of PTFE. Universal chemical resistance since the product is only exposed to PTFE.

FDA conform

Length mm	Shaft dia. mm	Chucking dia. mm	For ground joint NS	Dimensions according to drawing				Cat. No.:
				A	B	C	D	
350	10	8,0	29/32	90	24	3	140	C 374-12
450	10	8,0	29/32	90	24	3	140	C 374-14
600	10	8,0	29/32	90	24	3	140	C 374-18

### Applications:

Tangential flow with little turbulence. Ideal for high and narrow vessels. The tilting half-moon blade is ideal for stirring in round-bottom flasks with ground joint neck. Blades (see Cat. No. C 400-.. on page 49) are available separately and can be mounted additionally.

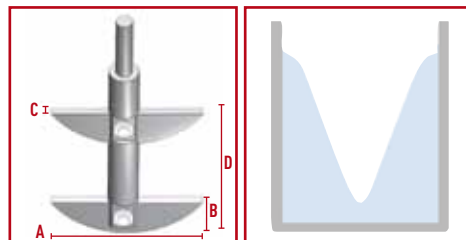

## BOLA INNOVATION

### Stirrer Shafts – solid and chemically resistant

Glass stirrer shafts can break, metal stirrer shafts are not chemically resistant. In comparison, BOLA Stirrer Shafts with stainless steel core are unbreakable and have an almost universal chemical resistance.



SUITABLE: page 38  
Stirrer bearings for  
BOLA stirrer shafts

## BOLA Stirrer Shafts with One Paddle

Material: PTFE Temperature resistance: from -200 °C to +250 °C Chemical resistance: +++ universal Stirring effect: bottom-up

Product description:


PTFE-jacketed stainless steel shaft, paddle completely made of PTFE with two 45° angled blades. Universal chemical resistance since the product is only exposed to PTFE.

FDA conform

Length mm	Shaft dia. mm	Chucking dia. mm	Dimensions according to drawing			Cat. No.:
			A	B	C	
450	8	6,5	80	18	4	C 379-02
600	8	6,5	80	18	4	C 379-04
800	8	6,5	80	18	4	C 379-06
600	10	8	110	20	5	C 379-08
800	10	8	110	20	5	C 379-10
1.000	10	8	110	20	5	C 379-12
1.000	16	14	140	25	12	C 379-18

### Applications:

The product is sucked bottom-up, very good axial flow with low shear force.

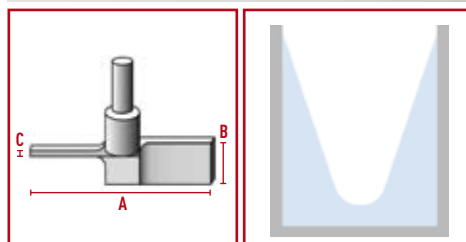

## BOLA U-Shaped Stirrer Shafts

**BESTSELLER**

Material:  
PTFE

Temperature resistance:  
from -200 °C to +250 °C

Chemical resistance:  
+++ universal

Product description:



PTFE-jacketed stainless steel shaft, u-shaped stirrer blade completely made of PTFE. Universal chemical resistance since the product is only exposed to PTFE.

FDA conform

Length mm	Shaft dia. mm	Chucking dia. mm	Dimensions according to drawing				Cat. No.:
			A	B	C	D mm	
350	8	6,5	40	35	20	26	C 384-01
350	8	6,5	60	40	25	30	C 384-02
450	8	6,5	60	40	25	30	C 384-04
450	8	6,5	80	50	30	44	C 384-06
600	8	6,5	80	50	30	44	C 384-08
600	8	6,5	100	60	35	56	C 384-10
800	8	6,5	60	40	25	30	C 384-11
350	10	8,0	80	50	30	44	C 384-16
450	10	8,0	80	50	30	44	C 384-17
450	10	8,0	100	60	35	56	C 384-07
450	10	8,0	130	80	55	80	C 384-19
600	10	8,0	80	50	30	44	C 384-22
600	10	8,0	100	60	35	56	C 384-24
800	10	8,0	100	60	35	56	C 384-28
1.000	10	8,0	100	60	35	56	C 384-32
1.200	10	8,0	100	60	35	56	C 384-40
600	10	8,0	130	80	55	80	C 384-44
800	10	8,0	130	80	55	80	C 384-48
1.000	16	14,0	130	80	55	80	C 384-50
800	16	14,0	150	120	90	90	C 384-52
1.000	16	14,0	150	120	90	90	C 384-58
1.200	16	14,0	150	120	90	90	C 384-64
1.600	16	14,0	180	140	100	110	C 384-74
1.600	16	14,0	240	180	140	170	C 384-80

Applications:

Strong, tangential flow with high shear rate in the margin area, little sediments on the wall of the vessel. Ideal for mixing viscous liquids.



**NEW**

**NEW**  
**NEW**  
**NEW**

**NEW**  
**NEW**



SUITABLE: page 33  
Additional stirrer blades



**BOLA**  
**Practical Tip**

Marion Hammerich » construction

**Big effective circular diameter, but small vessel neck?**

No problem if you use our tilting moon-shaped or centrifugal stirrer shafts.

see pages 20 and 25



**HELPFUL: page 128**  
Stirrer shafts made of static dissipative PTFE-EX

## BOLA BENEFITS

- » very low centrifugal forces due to low weight
- » suitable for both left- and right-handed rotation (except for GL 10 thread: no left-handed rotation possible)
- » no resonance
- » simple assembly by means of screw joints with clamp rings
- » pivot (length 90 mm) can be shortened by the user

## BOLA Globe Stirrer Couplings

**BESTSELLER**

Material: **POM**      Temperature resistance: **from -30 °C to +100 °C**      Chemical resistance: **++ very good**

### Product description:


Made of POM, a plastic material with a good mechanical strength, powerful transmission of up to 300 Ncm, suitable for a speed of up to 1.200 rounds per minute, maximum misalignment of axes 10 mm.

**NEW**

	Opening for stirrer shaft mm	Upper dia. mm	Total length mm	Cat. No.:
<b>A</b>	Ø 4,0	10	190	<b>C 398-04</b>
<b>B</b>	Ø 6,5 and 10	10	190	<b>C 398-08</b>
<b>C</b>	Ø 8 and 10	10	190	<b>C 398-12</b>
<b>D</b>	Inner square SW6	SW8	180	<b>C 399-12</b>
<b>E</b>	GL 10	10	170	<b>C 393-12</b>

### Applications:

Ideal for balancing misalignment of axes between agitator and stirrer shaft, suitable for glass, metal or BOLA stirrer shafts.

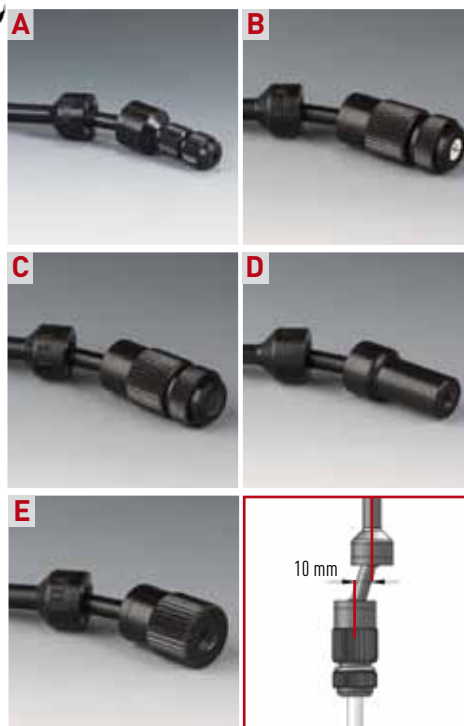

## BOLA INNOVATION

### Globe Stirrer Coupling

The BOLA Globe Stirrer Coupling is made of a light-weight but robust plastic. It only produces a very low centrifugal force, its vibrations are damped so that it runs very smoothly.



## BOLA Maxi Propeller Stirrer Shafts

**BESTSELLER**

Material: **PTFE**    Temperature resistance: **from -200 °C to +250 °C**    Chemical resistance: **+++ universal**    Stirring effect: **bottom-up**

Product description:


PTFE-jacketed stainless steel shaft, propeller completely made of PTFE with three 45° angled blades. Universal chemical resistance since the product is only exposed to PTFE.

FDA conform

Length mm	Shaft dia. mm	Chucking dia. mm	Dimensions according to drawing			Cat. No.:
			A	B	C mm	
450	10	8	140	20	4	C 392-28
600	10	8	140	20	4	C 392-34
800	10	8	140	20	4	C 392-40
1.200	10	8	140	20	4	C 392-42
800	16	14	140	26	6	C 392-44
1.000	16	14	140	26	6	C 392-46
600	16	14	200	26	6	C 392-52
800	16	14	200	26	6	C 392-58
1.000	16	14	200	26	6	C 392-64
1.200	16	14	200	26	6	C 392-70
1.600	16	14	200	26	6	C 392-74
1.200	16	14	280	26	8	C 392-80
1.200	16	14	400	26	8	C 392-90
1.600	16	14	400	26	8	C 392-94

### Applications:

The product is sucked bottom-up, very good axial flow with low local shear force.

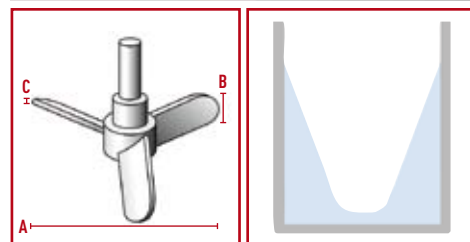

« »  
Special Request?  
+49 (0) 93 46-92 86-0

### Stirrer Shafts

»» At BOLA we get custom made stirrer shafts with exactly the dimensions that we require. This way we achieve optimal mixing of our products in glass reactors.

««

Dieter Waldhaus » Merck KGaA



## BOLA Impeller Stirrer Shafts

Material: PTFE  
 Temperature resistance: from -200 °C to +250 °C  
 Chemical resistance: +++ universal

Product description:



PTFE-jacketed stainless steel shaft, impeller completely made of PTFE with three blades bent backwards, lower side of impeller either even or 15° angled. Universal chemical resistance since the product is only exposed to PTFE

FDA conform

	Length mm	Shaft dia. mm	Chucking dia. mm	Angle	Dimensions according to drawing			Cat. No.:
					A mm	B mm	C mm	
<b>A</b>	350	10	8	15°	45	22	5	C 389-18
	350	10	8	15°	60	25	5	C 389-20
	450	10	8	15°	60	25	5	C 389-22
<b>B</b>	350	10	8	0°	100	25	5	C 389-24
	450	10	8	0°	100	25	5	C 389-28
	600	10	8	0°	100	25	5	C 389-32
	800	10	8	0°	100	25	5	C 389-36
	600	10	8	0°	150	25	5	C 389-62
	800	10	8	0°	150	25	5	C 389-66

Applications:

Very good and gentle stirring due to blades which are bent backwards, low shear force. The 15° angled impellers are ideal for stirring in vessels with round bottom.

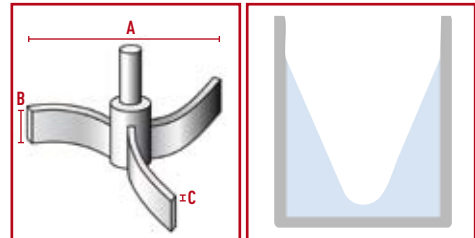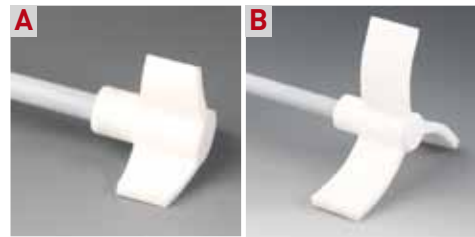

## BOLA Centrifugal Stirrer Shafts

Material: PTFE  
 Temperature resistance: from -200 °C to +250 °C  
 Chemical resistance: +++ universal

Product description:


PTFE-jacketed stainless steel shaft, stirring unit (movable paddles, bolt and receiver for paddles) completely made of PTFE. The paddles open up at increasing speed. Universal chemical resistance since the product is only exposed to PTFE.

FDA conform

	Length mm	Shaft dia. mm	Chucking dia. mm	Dimensions according to drawing			Cat. No.:
				A mm	B mm	C mm	
	350	6	4	50	17	2,0	C 377-04
	350	8	6,5	90	17	2,0	C 377-08
	450	8	6,5	90	17	2,5	C 377-10
	350	10	8,0	90	17	2,5	C 377-12
	450	10	8,0	90	17	2,5	C 377-14
	600	10	8,0	90	17	2,5	C 377-16

Applications:

The stirrer shaft can be used for stirring in narrow mouth vessels or in vessels with ground joint opening (starting at size NS 24).

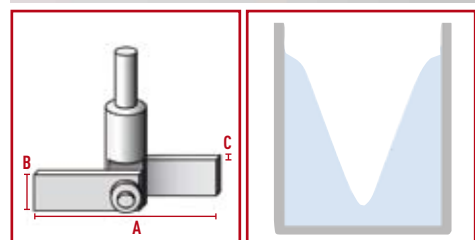

For ground joint Starting at NS 24



SUITABLE: page 50  
 Additional stirrer paddles

## BOLA Gassing Stirrer

Material:	Temperature resistance:	Chemical resistance:	Vacuum:	autoclave:
PTFE	from -200 °C to +250 °C	+++ universal	suitable	121°

### Product description:


PTFE-jacketed stainless steel shaft, propeller with four blades completely made of PTFE. Clockwise rotation of the shaft produces a vacuum behind the stirrer blades. By this vacuum, the gas is transported from the gas compartment through the hollow shaft and into the product. The rotation speed depends on the fluid level and the immersion depth: e. g. 430 rpm are necessary at 150mm, and 690 rpm are necessary at 350 mm. The length of the shaft and the suction pipe can be adapted individually. Minimum one baffle is imperative for proper operation (Cat.No. C 490-..). Universal chemical resistance, the product is only exposed to PTFE.

FDA conform

Length mm	Shaft dia. mm	Chucking dia. mm	Dimensions according to drawing				Cat. No.
			A	B	C	D	
484	10	8	72	12	20	187	C 488-08
559	10	8	72	12	20	272	C 488-14
657	10	8	72	12	20	387	C 488-20

### Applications:

Reduced reduction times compared to stirring without gassing due to high aeration of the product. Strong radial flow, ideal for gassing of liquids.

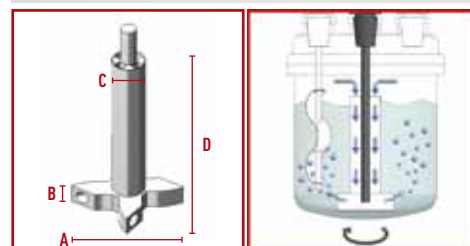

## BOLA Slip-On Baffle

Material:	Temperature resistance:	Chemical resistance:	Vacuum:	autoclave:
PTFE	from -200 °C to +250 °C	+++ universal	suitable	121°

### Product description:

Completely made of PTFE, supporting ring made of PFA. The baffle can be mounted at any position on a temperature probe or a solo stirrer shaft. Design based on DIN 28131. Universal chemical resistance, the product is only exposed to PTFE.

FDA conform

For ground joint NS	Width mm	For shaft dia. mm	Fitting length mm ca.	Cat.No.:
19/26	15	8	125	C 490-10
29/32	23	8	125	C 490-12

### Applications:

Prevents rotation of the stirring products and provides an axial flow for better mixing. For gassing stirrers, one baffle is imperative. The position in the reactor can be optimized with BOLA Swivelling Screw Fittings (see Cat.No. D 690-.. and D 692-..).



**SUITABLE:** page 185  
BOLA temperature probes for assembly  
of a baffle.

## BOLA Stirrer Shafts with Blade


Material: PTFE  
 Temperature resistance: from -200 °C to +250 °C  
 Chemical resistance: +++ universal

Product description:  
 PTFE-jacketed stainless steel shaft, blade completely made of PTFE.  
 Universal chemical resistance since the product is only exposed to PTFE.

FDA conform

Length mm	Shaft dia. mm	Chucking dia. mm	Dimensions according to drawing			Cat. No.:
			A mm	B mm	C mm	
450	8	6,5	90	20	5	C 381-04
600	8	6,5	90	20	5	C 381-06
450	10	8,0	120	30	5	C 381-08
600	10	8,0	120	30	5	C 381-10
800	10	8,0	120	30	5	C 381-12
1.000	16	14,0	150	50	5	C 381-18

**Applications:**  
 Tangential flow with little turbulence, gentle stirring.

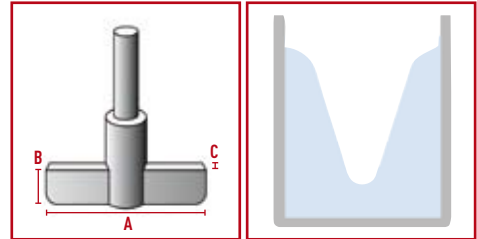

**HELPFUL:** page 292  
 Information on maximum revolutions per minute for BOLA stirrer shafts



## BOLA offers custom manufacture.

Every lab is different. By offering an extensive range of established and sophisticated standard solutions we take into account the varied requirements of the respective branches and sectors.

But maybe you are looking for something special? Something that is not included in our standard product range?

In that case we are able to offer an individual custom manufacture. This is easier and faster than you may expect. Discuss your idea with our professionals. They will give advise and support during design. Finally, your idea will become real: We produce as per your requirements and in compliance with the chosen raw materials – already from 1 piece.

We only need a drawing (a sketch is sufficient) and some further information

» **You have a special request?**  
 Give us a call: +49 (0) 93 46-92 86-0.

Hotline +49 (0) 93 46-92 86-0

## BOLA Stirrer Shafts with Two Paddles

Material: PTFE      Temperature resistance: from -100 °C to +240 °C      Chemical resistance: +++ universal      Stirring effect: bottom-up

Product description:


PTFE-jacketed stainless steel shaft, two PTFE paddles arranged crosswise at 90°. Upper paddle is fixed by means of clamp screws made of PEEK compound.

FDA conform

Length mm	Shaft dia. mm	Chucking dia. mm	Distance of blades mm	Dimensions according to drawing			Cat. No.:
				A mm	B mm	C mm	
450	8	6,5	50	80	18	4	C 380-02
600	8	6,5	50	80	18	4	C 380-04
800	8	6,5	50	80	18	4	C 380-06
600	10	8,0	100	110	20	5	C 380-08
800	10	8,0	100	110	20	5	C 380-10
1.000	10	8,0	100	110	20	5	C 380-12
600	16	14,0	150	140	25	12	C 380-14
800	16	14,0	150	140	25	12	C 380-16
1.000	16	14,0	150	140	25	12	C 380-18
1.200	16	14,0	150	140	25	12	C 380-20

Applications:

The product is sucked bottom-up, very good axial flow with low local shear force. The upper paddle can be positioned individually.

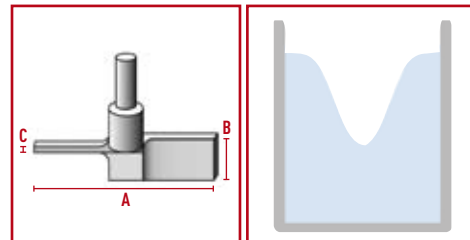

## BOLA Fan-Shaped Stirrer Shafts

Material: PTFE      Temperature resistance: from -200 °C to +250 °C      Chemical resistance: +++ universal

Product description:


PTFE-jacketed stainless steel shaft, fan-shaped stirring unit completely made of PTFE.

FDA conform

Length mm	Shaft dia. mm	Chucking dia. mm	For ground joint NS	Dimensions according to drawing		Cat. No.:
				A mm	B mm	
300	8	6,5	29/32	24	35	C 382-02
300	8	6,5	45/40	38	45	C 382-06
450	8	6,5	45/40	38	45	C 382-08
450	10	8	60/46	53	55	C 382-12
600	10	8	60/46	53	55	C 382-14

Applications:

The mixture is drawn off from the bottom. Ideal mixing due to centrifugal forces. Ideal for stirring in narrow mouth vessels or in vessels with ground joint openings.

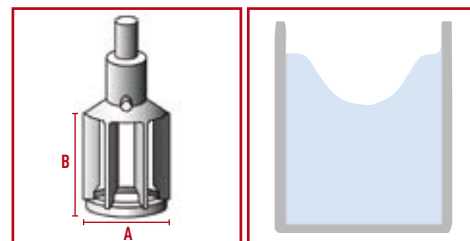

SUITABLE: page 23  
Globe stirrer couplings

## BOLA Discs Stirrer Shafts

Material: PTFE  
 Temperature resistance: from -200 °C to +250 °C  
 Chemical resistance: +++ universal

Product description:

PTFE-jacketed stainless steel shaft, discoidal stirrer blade with six radial paddles completely made of PTFE, similar to a "Rushton Turbine" stirrer shaft. Universal chemical resistance since the product is only exposed to PTFE.



FDA conform

NEW  
NEW

Length mm	Shaft dia. mm	Chuck- ing dia. mm	Suitable for		Dimensions according to drawing				Cat. No.:
			NS	NW	A	B	C	D mm	
350	6	4	29/32		25	5	2	6,3	C 598-12
350	6	4	45/40		38	8	2	10	C 598-16
450	6	4	45/40		38	8	2	10	C 598-18
600	6	4	45/40		38	8	2	10	C 598-19
350	10	8		60	50	10	2	12,5	C 598-22
600	10	8		60	50	10	2	12,5	C 598-26
350	10	8		100	75	15	3	18,8	C 598-32
600	10	8		100	75	15	3	18,8	C 598-36
600	10	8		150	140	28	4	35	C 598-42
1.000	10	8		150	140	28	4	35	C 598-46
1.000	10	8		200	180	36	4	45	C 598-56
1.200	16	14		200	180	36	4	45	C 598-66

Applications:

Axial suction of mixture, strong radial flow. Ideal for aerating liquids.



**Big effective circular diameter, but small vessel neck?**

No problem if you use our tilting moon-shaped or centrifugal stirrer shafts.

see pages 20 and 25

## BOLA Double Impulse Stirrer Shafts

Material: PTFE  
 Temperature resistance: from -100 °C to +240 °C  
 Chemical resistance: +++ universal  
 Stirring effect: bottom-up

Product description:



PTFE-jacketed stainless steel shaft, two paddles arranged crosswise at 90° completely made of PTFE. Upper paddle is fixed by means of clamp screws made of PEEK compound. Universal chemical resistance since the product is only exposed to PTFE.

FDA conform

Length mm	Shaft dia. mm	Chuck- ing dia. mm	Distance of blades mm	Dimensions according to drawing			Cat. No.:
				A	B	C mm	
600	10	8	150	140	34	19	C 391-18
800	16	14	150	140	34	19	C 391-28
1.200	16	14	300	240	56	32	C 391-34

Applications:

The inner stirring surfaces provide an upswing, while the parallel paddle ends provide a downward movement. Even viscous liquids are mixed ideally. The upper paddle can be positioned individually.





## BOLA Propeller Stirrer Shafts with 4 Blades

Material: PTFE    Temperature resistance: from -200 °C to +250 °C    Chemical resistance: +++ universal    Stirring effect: bottom-up

### Product description:

PTFE-jacketed stainless steel shaft, propeller completely made of PTFE with four 45° angled angular blades. Universal chemical resistance since the product is only exposed to PTFE.


FDA conform

	Length mm	Shaft dia. mm	Chucking dia. mm	Dimensions according to drawing			Cat. No.:
				A	B	C mm	
	350	8	6,5	50	18	4	C 484-18
<b>NEW</b>	600	8	6,5	100	20	5	C 484-22
<b>NEW</b>	450	10	8,0	75	20	5	C 484-32
<b>NEW</b>	600	10	8,0	75	20	5	C 484-34
	600	10	8,0	100	20	5	C 484-36
<b>NEW</b>	800	10	8,0	140	22	6	C 484-40
<b>NEW</b>	1000	10	8,0	100	20	5	C 484-44
<b>NEW</b>	1000	16	14,0	200	25	8	C 484-50

### Applications:

The product is sucked bottom-up, good axial flow with low shear force.

« »  
Special Request?  
+49 (0) 93 46-92 86-0

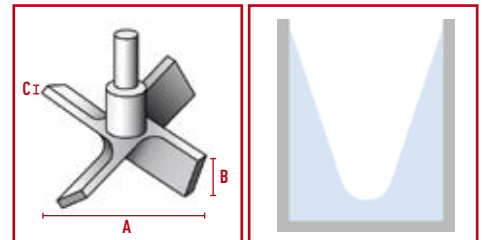

## BOLA Mini-Propeller Stirrer Shafts

Material: PTFE      Temperature resistance: from -200 °C to +250 °C      Chemical resistance: +++ universal      Stirring effect: bottom-up

Product description:

PTFE-jacketed stainless steel shaft, propeller completely made of PTFE with three 45° angled angular blades. Universal chemical resistance since the product is only exposed to PTFE.

FDA conform


NEW

NEW

Length mm	Shaft dia. mm	Chucking dia. mm	Suitable for NS	Dimensions according to drawing			Cat. No.:
				A	B	C	
200	6	4	29/32	25	8	2	C 482-08
350	6	4	29/32	25	8	2	C 482-12
200	6	4	45/40	40	12	2	C 482-20
350	6	4	45/40	40	12	2	C 482-24

### Applications:

The product is sucked bottom-up, good axial flow with low shear force. The small stirring diameter allows stirring in narrow mouth vessels or in vessels with ground joint openings.



## BOLA Micro Surface Stirrer Shafts

Material: PTFE      Temperature resistance: from -200 °C to +250 °C      Chemical resistance: +++ universal

Product description:


PTFE-jacketed stainless steel shaft, blade completely made of PTFE with four round paddles. Universal chemical resistance since the product is only exposed to PTFE.

FDA conform

Length mm	Shaft dia. mm	Chucking dia. mm	Dimensions according to drawing		Cat. No.:
			A	B	
120	3,5	2,5	8	8	C 486-08
180	3,5	2,5	12	12	C 486-12
200	4,0	3,0	14	14	C 486-16
200	4,0	3,0	16	16	C 486-20

### Applications:

Ideal for stirring in test tubes or narrow-mouth vessels, optimum mixture in round vessels and in vessels with low fill level.



## BOLA Solo Stirrer Shafts

Material: PTFE      Temperature resistance: from -200 °C to +250 °C      Chemical resistance: +++ universal

Product description:

PTFE-jacketed stainless steel shaft with fused lower end. Universal chemical resistance since the product is only exposed to PTFE.

FDA conform

Length mm	Shaft dia. mm	Chucking dia. mm	Cat. No.:
350	8	6,5	C 472-08
600	8	6,5	C 472-20
350	10	8,0	C 474-08
600	10	8,0	C 474-20
800	10	8,0	C 474-30
1.000	10	8,0	C 474-34
1.200	10	8,0	C 474-40
1.200	16	14,0	C 476-40
1.600	16	14,0	C 476-60

### Applications:

Ideal for use together with BOLA Stirrer Blades which can be fixed individually on the Solo Stirrer Shaft. Also usable as stirring staff for manual stirring.



## BOLA INNOVATION

### Stirrer shaft kit

Consisting of solo stirrer shaft and stirrer blades. Stirrer shafts can be composed individually since the blades can be fixed in the requested height and direction.



## BOLA Stirrer Blades

These solid stirrer blades are made of PTFE and have a set of clamp screws made of a PTFE/PEEK compound. The blades can be fixed tightly on BOLA Stirrer Shafts by means of the clamp screws. A spanner wrench is included for easy assembly.

### Applications:

For flexible testing of optimum geometry and arrangement of blades on stirrer shafts. Usable to create stirrers with one single stage or with several stages.

Material: <b>PTFE</b>	Temperature resistance: <b>from -100 °C to +240 °C</b>	Chemical resistance: <b>+++ universal</b>	Stirring effect: <b>bottom-up</b>
--------------------------	---	--	--------------------------------------

### A Type: BOLA Propeller Blades

FDA conform

Shaft dia. mm	Dimensions according to drawing			Wrench size	Cat. No.:
	A	B	C		
8	75	18	3	15	C 440-08
10	75	18	3	19	C 440-10

### Applications:

The product is sucked bottom-up, good axial flow with low shear force.

### B Type: BOLA Impeller Blades



FDA conform

Shaft dia. mm	Dimensions according to drawing			Wrench size	Cat. No.:
	A	B	C		
10	60	25	6	19	C 443-08
10	100	25	6	19	C 443-10
10	150	25	6	19	C 443-14

### Applications:

Very good and gentle stirring due to blades which are bent backwards, low shear force.

« »  
Special Request?  
+49 (0) 93 46-92 86-0

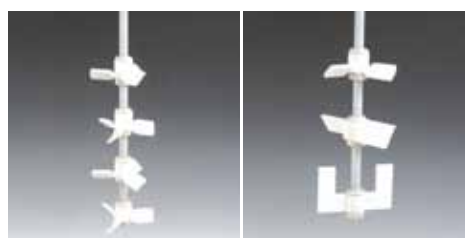

## BOLA Stirrer Blades

Material: PTFE      Temperature resistance: from -100 °C to +240 °C      Chemical resistance: +++ universal      Stirring effect: bottom-up

### C Type: BOLA Propeller with 4 Blades

FDA conform

Shaft dia. mm	Dimensions according to drawing			Wrench size	Cat. No.:
	A	B	C mm		
8	50	18	4	15	C 448-08
10	100	20	5	19	C 448-10
10	140	20	5	19	C 448-20
10	200	20	5	19	C 448-28
16	140	25	12	32	C 448-36
16	200	25	12	32	C 448-42

#### Applications:

The product is sucked bottom-up, good axial flow with low shear force.



### D Type: BOLA U-Shaped Blades

FDA conform

Shaft dia. mm	Dimensions according to drawing				Wrench size	Cat. No.:
	A	B	C	D mm		
8	60	40	22	30	15	C 445-08
8	100	60	35	56	15	C 445-12
10	80	50	30	44	19	C 445-16
10	100	60	35	56	19	C 445-20
10	130	80	55	80	19	C 445-30
10	150	120	90	90	19	C 445-34
16	130	80	55	80	32	C 445-40
16	150	120	90	90	32	C 445-44

#### Applications:

Strong, tangential flow with high shear rate in the margin area, little sediments on the wall of the vessel. Ideal for mixing viscous liquids.



### BOLA Practical Tip

Marie-Luise Bender » final assembly

#### For an easier assembly of blades:

Slide blade on the stirrer shaft, add clamp piece from above and nut from below and tighten it with a wrench.

## BOLA Stirrer Blades

Material: PTFE	Temperature resistance: from -100 °C to +240 °C	Chemical resistance: +++ universal	Stirring effect: bottom-up
-------------------	--	---------------------------------------	-------------------------------


### E Type: BOLA Paddle

FDA conform

Shaft dia. mm	Dimensions according to drawing mm			Wrench size	Cat. No.:
	A	B	C		
8	80	18	4	15	C 446-08
10	80	20	5	19	C 446-10
10	110	20	5	19	C 446-12
10	140	20	5	19	C 446-14
16	140	25	12	32	C 446-16

#### Applications:

The product is sucked bottom-up, very good axial flow with shear force.




### F Type: BOLA Maxi Propeller Blades

FDA conform

Shaft dia. mm	Dimensions according to drawing mm			Wrench size	Cat. No.:
	A	B	C		
10	140	20	4	19	C 441-10
10	200	20	6	19	C 441-12
16	140	26	6	32	C 441-14
16	200	26	6	32	C 441-16

#### Applications:

The product is sucked bottom-up, very good axial flow with local shear force.




### G Type: BOLA Moon-Shaped Blades

FDA conform

Shaft dia. mm	Dimensions according to drawing mm			For ground joint NS	Wrench size	Cat. No.:
	A	B	C			
8	65	18	3	24/29	15	C 442-08
10	90	24	3	29/32	19	C 442-10

#### Applications:

Tangential flow with little turbulence, the tilting half-moon blade is ideal for stirring in round-bottom flasks with ground joint necks. Blades are available separately (see Cat. No. C 400-... on page 49) and can be mounted additionally.



## Stirrer Shafts



At BOLA we get custom made stirrer shafts with exactly the dimensions that we require. This way we achieve optimal mixing of our products in glass reactors.



Dieter Waldhaus » Merck KGaA



## BOLA Stirrer Shafts with Reduced Chucking Diameter (RCD)

For some applications, it is necessary to use very long stirrer shafts. These stirrer shafts must have suitable diameters to be stable enough. It can occur that the chucking diameter of these long stirrer shafts is too big for the agitator. All BOLA Stirrer Shafts listed below have a professionally reduced chucking diameter of 10 mm and can be fixed safely in all common agitators.

**You need a smaller diameter, or a different stirrer shaft? No problem:** Simply indicate the requested diameter and the catalogue number of the stirrer shaft.



Material:	Temperature resistance:	Chemical resistance:
PTFE	from -200 °C to +250 °C	+++ universal

### A BOLA Stirrer Shafts with Blade RCD

PTFE-jacketed stainless steel shaft, blade completely made of PTFE. Universal chemical resistance since the product is only exposed to PTFE. Blade dimensions see Cat. No. C 381-.. on page 27.

FDA conform

Length mm	Shaft dia. mm	Chucking dia. mm	Cat. No.:
1.000	16	10	C 581-18

#### Applications:

Tangential flow with little turbulence, gentle stirring.



### B BOLA Moon-Shaped Stirrer Shafts RCD

PTFE-jacketed stainless steel shaft, tilting half-moon stirrer blade with double-sided groove and access for the stirrer shaft completely made of PTFE. Universal chemical resistance since the product is only exposed to PTFE. Blade dimensions see Cat. No. C 376-.. on page 20.

FDA conform

Length mm	Shaft dia. mm	Chucking dia. mm	Cat. No.:
600	16	10	C 576-20
800	16	10	C 576-22

#### Applications:

Tangential flow with little turbulence. The tilting half-moon blade is ideal for stirring in round-bottom flasks with ground joint necks. Blades are available separately and can be mounted additionally.



### C BOLA Maxi Propeller Stirrer Shafts RCD

PTFE-jacketed stainless steel shaft, propeller completely made of PTFE with three 45° angled blades. Universal chemical resistance since the product is only exposed to PTFE. Blade dimensions see Cat. No. C 392-.. on page 24.

FDA conform

Length mm	Shaft dia. mm	Chucking dia. mm	Cat. No.:
600	16	10	C 592-52
800	16	10	C 592-58
1.000	16	10	C 592-64
1.200	16	10	C 592-70

#### Applications:

The product is sucked bottom-up, very good axial flow with low local shear force.



« »  
Special Request?  
+49 (0) 93 46-92 86-0

## BOLA Stirrer Shafts with Reduced Chucking Diameter (RCD)

Material: PTFE      Temperature resistance: from -200 °C to +250 °C      Chemical resistance: +++ universal

### D BOLA Stirrer Shafts with One Paddle RCD

PTFE-jacketed stainless steel shaft, paddle completely made of PTFE with two 45° angled blades. Universal chemical resistance since the product is only exposed to PTFE. Blade dimensions see Cat. No. C 379-.. on page 21.

FDA conform

Length mm	Shaft dia. mm	Chucking dia. mm	Cat. No.:
1.000	16	10	C 579-18

#### Applications:

The product is sucked bottom-up, very good axial flow with low shear force.



### E BOLA Stirrer Shaft with Two Paddles RCD

PTFE-jacketed stainless steel shaft, two paddles arranged crosswise at 90° completely made of PTFE. Upper paddle is fixed by means of clamp screws made of PEEK compound. Blade dimensions see Cat. No. C 380-.. on page 28.

FDA conform

Length mm	Shaft dia. mm	Chucking dia. mm	Cat. No.:
600	16	10	C 580-14
800	16	10	C 580-16
1.000	16	10	C 580-18
1.200	16	10	C 580-20

#### Applications:

The product is sucked bottom-up, very good axial flow with low local shear force. The upper paddle can be positioned individually.



### F BOLA U-Shaped Stirrer Shafts RCD

PTFE-jacketed stainless steel shaft, U-shaped stirrer blade completely made of PTFE. Universal chemical resistance since the product is only exposed to PTFE. Blade dimensions see Cat. No. C 384-.. on page 22.

FDA conform

Length mm	Shaft dia. mm	Chucking dia. mm	Cat. No.:
800	16	10	C 584-52
1.000	16	10	C 584-58
1.200	16	10	C 584-64

#### Applications:

Strong, tangential flow with high shear rate in the margin area, little sediments on the wall of the vessel. Ideal for mixing viscous liquids.



## BOLA INNOVATION

### Stirrer Shafts – solid and chemically resistant

Glass stirrer shafts can break, metal stirrer shafts are not chemically resistant. In comparison, BOLA Stirrer Shafts with stainless steel core are unbreakable and have an almost universal chemical resistance.

## BOLA Stirrer Bearings

**BESTSELLER**

Material: PTFE, PPS  
 Temperature resistance: from -15 °C to +200 °C  
 Chemical resistance: +++ universal

### Product description:

Ground joint cone made of PTFE with sealing rings on the outside to prevent sticking of the connection and to reduce danger of breaking glass. A special gasket made of PTFE and an FPM o-ring which is compressed by a GL screw cap provide a good sealing of the stirrer shaft. This gasket can be exchanged after wearing.

FDA conform

Cone NS European standard	For stirrer shaft dia. mm	Total length mm	Thread of screw cap GL	Cat. No.:
19/26	6	63	18	C 424-04
19/26	8	65	25	C 424-05
24/29	8	69	25	C 424-08
24/29	10	70	25	C 424-09
29/32	6	72	18	C 424-12
29/32	8	74	25	C 424-13
29/32	10	72	25	C 424-14
45/40	10	80	25	C 424-16
45/40	16	86	32	C 424-18
Cone US standard	For stirrer shaft dia. mm	Total length mm	Thread of screw cap GL	Cat. No.:
24/40	8	80	25	C 429-14
24/40	10	80	25	C 429-18

### Applications:

Suitable for vacuum, perfect bearing for stainless steel, glass and BOLA Stirrer Shafts



## BOLA Distributor with Stirrer Bearing

Material: PTFE  
 Temperature resistance: from -15 °C to +200 °C  
 Chemical resistance: +++ universal  
 autoclave: 121°

### Product description:

Completely made of PTFE. With ground joint NS 45/40 and three GL-threaded necks. Center neck serves as stirrer bearing. A special gasket made of PTFE and an FPM o-ring which is compressed by a GL screw cap provide a good sealing of the stirrer shaft. The lateral necks can be used for connection of tubes and tubing by means of BOLA Laboratory Screw Joints. Integrated special nut for unlocking of stuck ground joint components. Universal chemical resistance, the product is only exposed to PTFE.

**NEW**

FDA conform

Dia of. stirrer shaft mm	Center neck GL	Lateral necks GL	For tubing O.D. mm	Cat. No.
8	25	2 x 14	2 x 8	C 435-08
10	25	2 x 14	2 x 8	C 435-10
16	32	2 x 14	2 x 8	C 435-16

### Applications:

For bottles and reaction vessels with ground joint. Mixing of liquids and addition of further products via the lateral GL-necks at the same time. Suitable replacement parts for the Stirrer Bearing, see BOLA Special Gaskets on page 41 and BOLA Replacement Screw Caps on page 41.



## BOLA Special Stirrer Bearings

Material: PTFE, ETFE	Temperature resistance: from -50 °C to +150 °C	Chemical resistance: +++ universal	Pressure: low	Vacuum: suitable
-------------------------	---	---------------------------------------	------------------	---------------------

### Product description:


The 29/32 ground joint of these bearings provides a safe seat in the reactor lid. The stirrer shaft is held by an invisible shaft guide made of borosilicate glass which has an adjustable vacuum sealing. The stirrer can be adjusted in height by means of a lock nut. There is no abrasion. A cooling tank for an optional lubricant against overheating is also included. Suitable for vacuum up to at least 700 mm Hg and for low overpressure. Speeds of up to 500 rpm – temporarily even 1000 rpm – are admissible.

FDA conform

Ground Joint NS	For stirrer shafts dia. mm	Cat. No.:
29/32	8	C 430-20
29/32	10	C 430-28

### Applications:

Particularly suitable for long-term use. For all stirrer shafts made of stainless steel, glass or for BOLA Stirrer Shafts with a diameter of 8 or 10 mm.

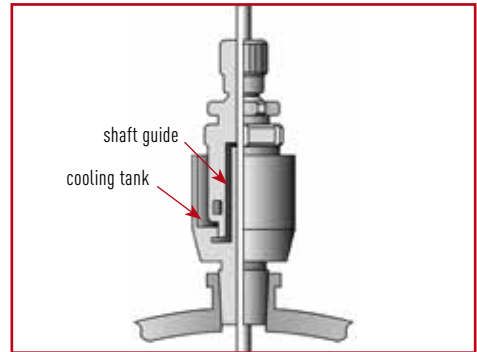

## BOLA Glass Stirrer Bearings

**BESTSELLER**

Material: PTFE, PPS	Temperature resistance: from -15 °C to +200 °C	Chemical resistance: +++ universal
------------------------	---	---------------------------------------

### Product description:

Combination of a borosilicate glass piece with ground joint, an interior PTFE shaft guide with integrated special gasket and a GL screw cap made of PPS. The special gasket made of PTFE and an FPM o-ring which is compressed by a GL screw cap provide a good sealing of the stirrer shaft. This gasket can be exchanged after wearing.

FDA conform

**NEW**

Cone NS European standard	For stirrer shaft dia. mm	Total length mm	Thread of screw cap GL	Cat. No.:
29/32	6	90	25	C 425-06
29/32	8	90	25	C 425-08
29/32	10	90	25	C 425-09
45/40	10	110	25	C 425-12
45/40	16	118	32	C 425-14
Cone US standard	For stirrer shaft dia. mm	Total length mm	Thread of screw cap GL	Cat. No.:
24/40	8	103	25	C 428-08
24/40	10	103	25	C 428-12

### Applications:

Suitable for vacuum, perfect bearing for stirrer shafts made of stainless steel, glass and for BOLA Stirrer Shafts.



## BOLA Ultra Stirrer Bearings

Material: **PTFE**      Temperature resistance: **from -200 °C to +250 °C**      Chemical resistance: **+++ universal**

**Product description:**

Combination of a borosilicate glass piece with ground joint, an interior PTFE shaft guide with integrated special gasket and a pressure screw made of PTFE with glass fibre. The FPM o-ring of the special gasket is compressed by the pressure screw and provides a good sealing of the stirrer shaft.


FDA conform

Cone NS	For stirrer shaft dia. mm	Total length mm ca.	Cat. No.:
29/32	8	108	C 426-08
29/32	10	108	C 426-09

**Applications:**

Suitable for vacuum, perfect bearing for stirrer shafts made of stainless steel, glass and for BOLA Stirrer Shafts.





**BOLA**  
**Practical Tip**

Raimund Heber » sales

**Grease for ground joints?**  
Forget about it. If you use our sleeves with ribs or with gripping ring, you don't need any more grease.

see page 172

## BOLA Replacement Glass Parts

Material: **Glass**      Temperature resistance: **from -200 °C to +250 °C**      Chemical resistance: **+++ universal**

**Product description:**

Borosilicate glass with ground joint and GL thread.

FDA conform

Size NS	Thread GL	Cat. No.:
29/32	25	C 425-50
24/40	25	C 425-51
45/40	25	C 425-53
45/40	32	C 425-55

**Applications:**

Spare part for BOLA Glass Stirrer Bearings.





## BOLA Replacement Shaft Guides

Material: **PTFE, FKM**    Temperature resistance: **from -15 °C to +200 °C**    Chemical resistance: **+++ universal**

Product description:

With integrated, exchangeable special gasket made of PTFE and an FPM o-ring.

FDA conform

**NEW**

For stirrer shaft dia. mm	Total length mm			Cat. No.:
6	57			C 425-57
8	57			C 425-58
10	57			C 425-59
16	66			C 425-60

**Applications:**

Spare part for BOLA Glass Stirrer Bearings and BOLA Ultra Stirrer Bearings.



## BOLA Special Gaskets

Material: **PTFE, FKM**    Temperature resistance: **from -15 °C to +200 °C**    Chemical resistance: **+++ universal**

Product description:

Easily exchangeable combination of PTFE gasket with FPM o-ring for PTFE shaft guides. The gaskets provide sealing of the stirrer shafts.

FDA conform

For stirrer shaft dia. mm	Thread GL			Cat. No.:
6	18 + 25			C 425-69
8	25			C 425-70
10	25			C 425-71
16	32			C 425-72

**Applications:**

Spare part for BOLA Glass Stirrer Bearings and BOLA Ultra Stirrer Bearings.



## BOLA Replacement Screw Caps

Material: **PPS**    Temperature resistance: **from -20 °C to +250 °C**    Chemical resistance: **++ very good**

Product description:

Screw caps compress the o-ring of the special gasket and provide sealing of the stirrer shaft.

**NEW**

For stirrer shaft dia. mm	Thread GL			Cat. No.:
6	18			C 425-82
6	25			C 425-83
8	25			C 425-84
10	25			C 425-86
16	32			C 425-88
16	25			C 425-90
22	32			C 425-92

**Applications:**

Spare part for BOLA Glass Stirrer Bearings.



## BOLA Magnetic Stirrer Heads with Ground Joint

Material: PTFE, PFA    Temperature resistance: from -15 °C to +250 °C    Chemical resistance: +++ universal    Vacuum: suitable

**Product description:**

Gastight permanent magnetic coupling with ball bearing encapsulated in ceramics and square connection for cardan joint. PTFE cone size 29 with release nut made of PTFE with glass fibre for easy removal of the ground joint. All products which are exposed to the medium do not contain any metals. The 8 mm shaft guide provides guidance without friction of stirrer shafts up to a speed of 800 rpm. The stirrer head can also be fixed directly into the chuck by mounting the included metal adaptor on the square connection (6 mm).

FDA conform

Torque Ncm	Ground joint NS	Viscosity up to mPas	Volume up to ml	Speed rpm max.	Total length mm	Cat. No.:
20	29/32	1.500	2.000	800	203	C 450-16
40	29/32	2.500	4.000	800	215	C 450-24

**Applications:**

For absolute vacuum.



## BOLA Magnetic Stirrer Heads with Flange

Material: PTFE, PFA    Temperature resistance: from -15 °C to +250 °C    Chemical resistance: +++ universal    Vacuum: suitable

**Product description:**


Gastight permanent magnetic coupling with ball bearing encapsulated in ceramics, square connection for cardan joint and flange NW 25. All products which are exposed to the medium do not contain any metals. The 8 mm shaft guide provides guidance without friction of stirrer shafts up to a speed of 800 rpm. The stirrer head can also be fixed directly into the chuck by mounting the included metal adaptor on the square connection (6 mm). Universal chemical resistance, since the product is only exposed to PTFE and PFA.

FDA conform

Torque Ncm	Flange NW	Viscosity up to mPas	Volume up to ml	Bolt circle dia. A mm	Bore dia. B mm	Length mm	Cat. No.:
60	25	3.500	6.000	75	9	215	C 454-24

**Applications:**

For absolute vacuum.



### BOLA INNOVATION

#### Magnetic Stirrer Heads

All wetted parts are metal-free. An almost universal chemical resistance is provided due to the use of fluoroplastics.

**BESTSELLER****BOLA Magnetic Stirrer Heads (G-MRK)**

Material: **PTFE, Glass**      Temperature resistance: **from -100 °C to +240 °C**      Chemical resistance: **+++ universal**

**Product description:**

Perfect combination of drive shaft with ball bearings, rotor and lower bearing made of PTFE/PEEK and a conductor made of borosilicate glass. Requires little space due to compact construction. No leakage or memory effects due to non-porous, welded rotor. This rotor holds the stirrer shaft by means of three stud screws which are fixed in the counterbores of the stirrer shaft. This provides optimum power transmission and a safe fixing. The 6 mm square can be fixed into the stirrer coupling or into the agitator.

FDA conform

Stirrer shaft Ø d mm	Height H mm	Conductor NS	Top of ground joint to top of stirrer shaft mm L2	Insertion length of shaft mm L4	Cat.No.
6	90	19/26	20	63	C 512-08
8	148	29/32	33	97	C 502-08
10	148	29/32	33	97	C 502-16
8	140	45/40	25	97	C 504-08
10	140	45/40	25	97	C 504-16


**Product advantages:**

- » powerful transmission  
for ground joint size 19/26: 15 Ncm  
for ground joint size 29/32 and 45/40: 50 Ncm
- » no grease required
- » all products which are exposed to the medium do not contain any metals
- » high speed of up to max. 1.500 rpm
- » high working temperatures up to +250°C are possible
- » excellent chemical resistance
- » safe to run dry
- » long durability
- » space-saving drive shaft O.D.'s  
for ground joint size 19/26: 28 mm  
for ground joint size 29/32 and 45/40: 38 mm

**Applications:**

Ideal for reactor lids with a center ground joint, suitable for stirrer shafts made of glass or stainless steel with counterbores (see page 44) for a safe fixing into the rotor.

- » L1 Internal height from the top of the ground joint to the vessel bottom.
- » L3 maximum total length of stirrer shaft = L1+L2

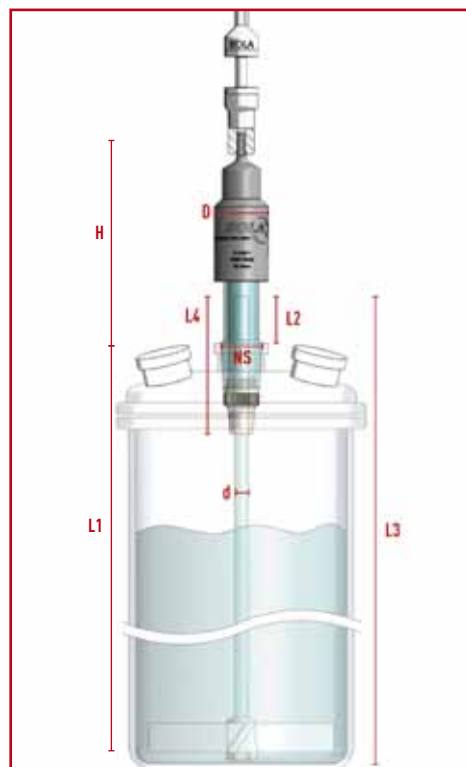

## BOLA Conductors for Magnetic Stirrer Heads

Material: **Glass**      Temperature resistance: **from -200 °C to +250 °C**      Chemical resistance: **+++ universal**

Product description:

Borosilicate glass with ground joint and glued upper bearing. Alternatively without ground joint for fusing on the reactor lid (upper bearing to be glued is included).

FDA conform

	Ground joint NS			Cat.No.:
<b>A</b>	19/26			C 463-19
	29/32			C 463-29
	45/40			C 463-45
<b>B</b>	for fusing			C 461-08

**Applications:**

Accessory for BOLA Magnetic Stirrer Head (see page 43).



**BOLA Practical Tip**  
Raimund Heber » sales

**Grease for ground joints?**  
Forget about it. If you use our sleeves with ribs or with gripping ring, you don't need any more grease.

see page 172

## BOLA Stirrer Shafts for Magnetic Stirrer Heads

Material: **Glass**      Temperature resistance: **from -200 °C to +250 °C**      Chemical resistance: **+++ universal**

Product description:


Ground and polished borosilicate stirrer shaft with integrated counterbores for the three stud screws of the rotor of the BOLA Magnetic Stirrer Head.

FDA conform

Length mm	Stirrer shaft dia. mm	Cat.No.:
400	10	C 492-16
600	10	C 492-24

**Applications:**

Accessory for BOLA Magnetic Stirrer Head (see page 43). Ideal for use together with BOLA Stirrer Blades which can be fixed individually. Shaft can be shortened on demand.

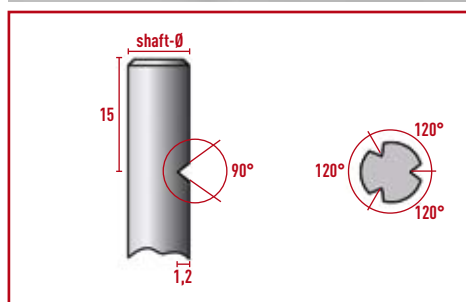

## BOLA BENEFITS

- » gastight stirrer head for perfect vacuum
- » stirrer shaft's height adjustable, approx. 40 mm
- » also suitable for shortened stirrer shafts
- » powerful transmission of up to 90 Ncm

### BOLA Magnetic Stirrer Heads (P-MRK)

# BESTSELLER

Material:  
PTFE, Glass

Temperature resistance:  
from -100 °C to +240 °C

Chemical resistance:  
+++ universal

#### Product description:

Ideal stirrer head for PTFE-jacketed stirrer shafts from BOLA. Consisting of capsuled drive shaft (stainless steel) with ball bearings, rotor and lower bearing made of PEEK-Compound and a hollow shaft made of borosilicate glass. Requires little space due to compact construction. No leakage or memory effects due to non-porous, welded rotor. Compression fittings for safe fixing of stirrer shaft and optimum power transmission. Joint-Cone with nut (Safe-Lab) for easy locking and unlocking of the ground joint. Square size 6 mm for accepting an agitator or a stirrer coupling.

FDA conform


For stirrer shaft dia. d mm	Height H mm	Size NS	L2 Insertion length of shaft mm	Drive shaft D O.D. mm	Cat. No.
8	145	29/32	95	50	C 520-24
10	145	29/32	95	50	C 520-28
10	145	45/40	95	50	C 520-48

#### Product advantages:

- » excellent chemical resistance
- » all products which are exposed to the medium do not contain any metals
- » no grease required / save to run dry
- » high speed of up to max. 1.500 rpm
- » drive shaft fixed for your safety
- » high durability
- » easy disassembly of all parts for cleaning

#### Applications:

- » Suitable for all BOLA Stirrer Shafts jacketed with PTFE. Ideal for reactor lids with center ground joint.
- » L1 The max. shaft length corresponds to the internal height from the top of the ground joint to the vessel bottom plus 15 mm.

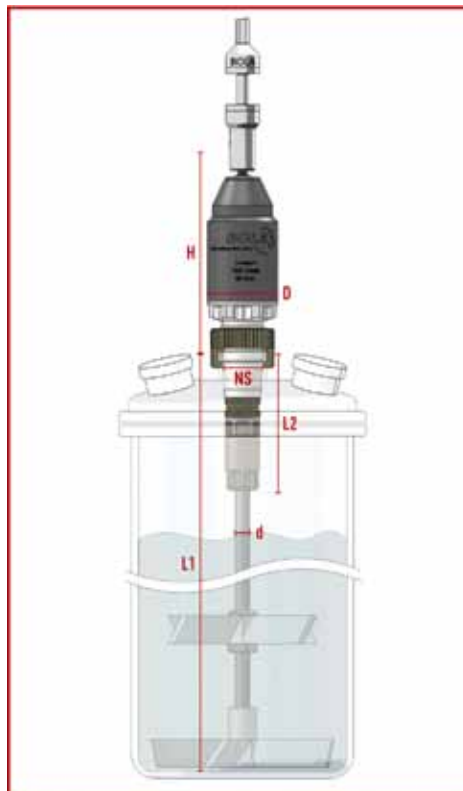

## BOLA Magnetic Stirrer Heads (P-MRK) with Flat Flange

Material:	Temperature resistance:	Chemical resistance:
PTFE, Glass	from -100 °C to +240 °C	+++ universal

### Product description:

Ideal stirrer head for PTFE-jacketed stirrer shafts from BOLA. Consisting of capsuled drive shaft (stainless steel) with ball bearings, rotor and lower bearing made of PEEK-Compound and a hollow shaft made of borosilicate glass. Requires little space due to compact construction. No leakage or memory effects due to non-porous, welded rotor. Compression fittings for safe fixing of stirrer shaft and optimum power transmission.

Suitable for flat flanges of Duran (former Schott AG), sealing to be made with a gasket of your choice. Square size 6 mm for accepting an agitator or a stirrer coupling.

FDA conform


For stirrer shaft dia. d mm	Height H mm	Flat Flange DN	L2 Insertion length of shaft mm	Drive shaft D O.D. mm	Cat. No.
10	160	40	95	50	C 522-40
10	160	50	95	50	C 522-50

### Product advantages:

- » gastight stirrer head for perfect vacuum
- » stirrer shaft's height adjustable, approx. 40 mm
- » also suitable for shortened stirrer shafts
- » powerful transmission of up to 90 Ncm
- » excellent chemical resistance
- » all products which are exposed to the medium do not contain any metals
- » no grease required / save to run dry
- » high speed of up to max. 1.500 rpm
- » drive shaft fixed for your safety
- » high durability
- » easy disassembly of all parts for cleaning

### Applications:

- » Suitable for all BOLA Stirrer Shafts jacketed with PTFE. Ideal for reactor lids with flat flange.
- » L1 The max. shaft length corresponds to the internal height from the top of the ground joint to the vessel bottom.

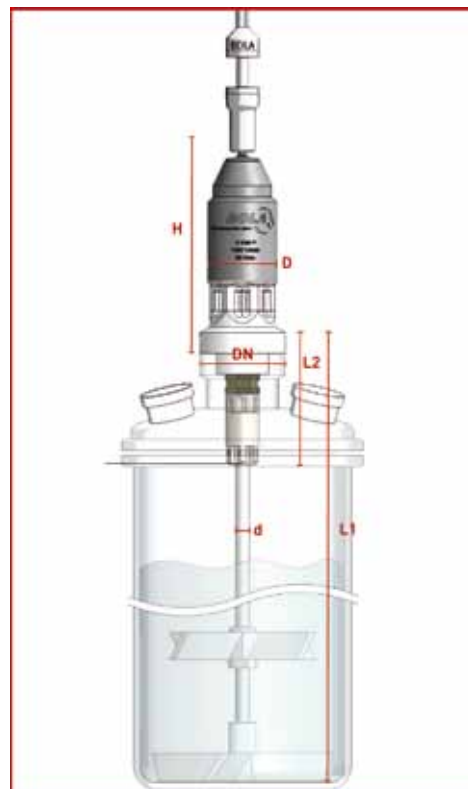

### Magnetic Stirrer Heads

- »» The Magnetic Stirrer Heads can easily be operated since they are outside of the glass reactor. And they are perfect to draw vacuum. <<<

Carina Cezanne » Merck KGaA



## BOLA INNOVATION

### Metal-free Magnetic Stirrer Heads

Many chemicals react with metal magnetic stirrer heads. Therefore, all wetted parts of BOLA Magnetic Stirrer Heads are metal-free and thus more economic.

## BOLA GT Glass Stirrer Shafts

Material: PTFE, Glass  
 Temperature resistance: from -200 °C to +250 °C  
 Chemical resistance: +++ universal

### Product description:

KPG stirrer shaft made of borosilicate glass, tiltable moon-shaped stirrer blade with angular groove and clamping bolts completely made of PTFE. For vessels with a 29/32 ground joint. Universal chemical resistance since the product is only exposed to PTFE and glass.

FDA conform

Length mm	Chucking O.D. mm	Shaft dia. mm	Blade dimensions mm	Cat.No.:
290	8	10	50 x 24 x 3	C 375-02
340	8	10	68 x 24 x 3	C 375-04
390	8	10	68 x 24 x 3	C 375-06
490	8	10	90 x 24 x 3	C 375-08
560	8	10	90 x 24 x 3	C 375-10

### Applications:

Tangential flow with little turbulence. The tilting half-moon blade is ideal for stirring in round-bottom flasks with ground joint necks. Blades are available separately and can be mounted additionally.



For ground joint NS 29/32

### BOLA Practical Tip

Ernst Schweitzer » development

#### Protecting glass stirrer shafts effectively

For protection from breaking for example due to misalignment of axes simply use our globe stirrer coupling. It is very lightweight and therefore has only low centrifugal force.

see page 23

## BOLA KPG Glass Stirrer Shafts

Material: PTFE, Glass  
 Temperature resistance: from -200 °C to +250 °C  
 Chemical resistance: +++ universal

### Product description:

KPG stirrer shaft with double pivot made of ground and polished borosilicate glass, tiltable moon-shaped stirrer blade with double-sided groove completely made of PTFE. For vessels with a 29/32 ground joint. Universal chemical resistance since the product is only exposed to PTFE and glass.

FDA conform

Length mm	Chucking O.D. mm	Shaft dia. mm	Blade dimensions mm	Cat.No.:
350	8	10	50 x 24 x 3	C 387-05
350	8	10	75 x 24 x 3	C 387-07
350	8	10	90 x 24 x 3	C 387-09
400	8	10	50 x 24 x 3	C 387-11
400	8	10	75 x 24 x 3	C 387-13
400	8	10	90 x 24 x 3	C 387-15

### Applications:

Tangential flow with little turbulence. The tilting half-moon blade is ideal for stirring in round-bottom flasks with ground joint necks. Blades are available separately and can be mounted additionally.



For ground joint NS 29/32

# BOLA Stirrer Blades

Why have stirrer blades to be „tiltable“?  
 Only a tiltable stirrer blade can be pulled through a narrow neck.

All BOLA Stirrer Blades have a central bore to fix them on a shaft. It is important that this bore is slightly out of the middle. Otherwise, it would be difficult to draw a shaft with mounted blade through

e.g. a NS 29 neck of a round bottom flask.  
 By the way: As soon as the shaft rotates, the centrifugal forces push the blade into the correct horizontal position and optimal mixing is assured.



Blocked: The blade does not tilt and cannot be removed from the vessel.



How it should be: The blade has an excentric bore. It tilts and can easily be removed from the vessel.

## BOLA Moon-Shaped Stirrer Blades

Material: PTFE      Temperature resistance: from -200 °C to +250 °C      Chemical resistance: +++ universal

Product description:  
 Completely made of PTFE, with angular groove. For vessels with a 29/32 ground joint.

FDA conform

Suitable for ml	Bore dia. mm	Blade dimensions mm	Cat.No.:
100	5,8	50 x 24 x 3	C 401-02
250	5,8	68 x 24 x 3	C 401-04
1.000	5,8	90 x 24 x 3	C 401-08

**Applications:**  
 For glass stirrer shafts and KPG glass stirrer shafts (Cat.No. C 375- ... on page 47).





## BOLA Moon-Shaped Stirrer Blades

Material: PTFE      Temperature resistance: from -200 °C to +250 °C      Chemical resistance: +++ universal

Product description:

Completely made of PTFE, with one-sided groove and bore dia. 10 mm.

FDA conform

Suitable for ml	For ground joint NS	Blade dimensions mm	Cat. No.:
100	24/29	50 x 18 x 3	C 402-07
100	29/32	50 x 24 x 3	C 402-09
250	24/29	65 x 18 x 3	C 402-14
250	29/32	68 x 24 x 3	C 402-16
500	24/29	75 x 18 x 3	C 402-19
500	29/32	75 x 24 x 3	C 402-21
1.000	29/32	90 x 24 x 3	C 402-24
2.000	29/32	110 x 24 x 3	C 402-26
4.000/6.000	29/32	125 x 24 x 3	C 402-31

**Applications:**

For glass stirrer shafts with one-sided pivot.



## BOLA Moon-Shaped Stirrer Blades

Material: PTFE      Temperature resistance: from -200 °C to +250 °C      Chemical resistance: +++ universal

Product description:

Completely made of PTFE, with double-sided groove.



FDA conform

Suitable for ml	Bore dia. mm	For ground joint NS	Blade dimensions mm	Cat.No.:
100	8,5	24/29	50 x 18 x 3	C 400-06
100	8,5	29/32	50 x 24 x 3	C 400-08
250	8,5	24/29	65 x 18 x 3	C 400-12
250	8,5	29/32	68 x 24 x 3	C 400-14
500	8,5	24/29	75 x 18 x 3	C 400-16
500	8,5	29/32	75 x 24 x 3	C 400-18
1.000	8,5	29/32	90 x 24 x 3	C 400-20
2.000	8,5	29/32	110 x 24 x 3	C 400-22
2.000	12,5	45/40	125 x 35 x 3	C 400-24
4.000/6.000	8,5	29/32	125 x 24 x 3	C 400-26
4.000/6.000	12,5	45/40	145 x 35 x 4	C 400-28

**Applications:**

For glass stirrer shafts with double pivot, KPG glass stirrer shafts (Cat.No. C 387- ... on page 47) and PTFE-jacketed stainless steel stirrer shafts (Cat. No. C 376-... on page 20).

Special Request?  
+49 (0) 93 46-92 86-0



## BOLA Centrifugal Stirrer Blades

Material: <b>PTFE</b>	Temperature resistance: <b>from -200 °C to +250 °C</b>	Chemical resistance: <b>+++ universal</b>
--------------------------	---	--

Product description:  
Completely made of PTFE, consisting of 2 paddles, bolt and clamp ring. For vessels with a 24/29 ground joint (or bigger).

FDA conform

Stirring dia. mm	Blade dimensions mm	Cat. No.:
50	2	<b>C 407-04</b>
70	2	<b>C 407-06</b>
90	2,5	<b>C 407-08</b>

**Applications:**  
For centrifugal stirrer shafts (Cat. No. C 377-.. on page 25)

Special Request?  
+49 (0) 93 46-9286-0



## BOLA Bolts and Clamp Rings

Material: <b>PTFE</b>	Temperature resistance: <b>from -200 °C to +250 °C</b>	Chemical resistance: <b>+++ universal</b>
--------------------------	---	--

Product description:  
Completely made of PTFE, bolts are available in 2 different versions:

### A Cylindrical shape

FDA conform

Bolt dia. mm	Usable length mm	For blades with bore dia. mm	Cat. No.:
6	12	6,5	<b>C 410-02</b>
12	16	12,5	<b>C 410-06</b>

### B With a distance piece between blade and stirrer shaft. The blade remains movable.

Bolt dia. mm	Usable length mm	For blades with bore dia. mm	Cat. No.:
8	12	8,5	<b>C 410-04</b>
12	19	12,5	<b>C 410-08</b>

**Applications:**  
For moon-shaped stirrer blades with double-sided groove (Cat. No. C 400- .. on page 49)





## BOLA Stirring Bars



### What you should know about magnetic stirring and mixing

For optimum results, both drive magnet and stirring bar are decisive. For optimum efficiency, the distance between the magnetic poles of the drive magnet and the length of the stirring bar should be equal. A magnetic stirring bar which is too small will eventually gravitate toward one of the poles of the drive magnet. Stirring efficiency is influenced by the material, by the thickness of the cover plate and the thickness of the vessel. For the best magnetic coupling, the distance between the magnets should be minimized.

### What you should know about the choice of stirring bars

Improperly selected stirring bars are often cause flickering of the bars in the vessel, respectively ineffective mixing of the product. You can find an overview of the most common stirring bars here below:

#### Cylindrical Magnetic Stirring Bars:

They are the most commonly used magnetic stirring bars. Due to their simple shape they can be offered at very attractive prices. Cylindrical magnetic stirring bars offer excellent centering and smooth running characteristics.

#### Glass Magnetic Stirring Bars:

They have a non-porous and smooth glass-coating. All following processes are not affected by any carry-over. There is an increased abrasion between glass vessels and glass stirring bars.

#### Ultra Magnetic Stirring Bars:

These magnetic stirring bars have very smooth and seamless surfaces. No substance can penetrate into their surfaces and thus, all following processes are not affected by any „carry-over“. They are mainly used for high-purity work or trace analysis

#### Power Magnetic Stirring Bars:

Due to special magnetic material, their torque loads are larger than those of conventional magnetic stirring bars. Power magnetic stirring bars are mainly used for agitating viscous liquids or for bridging larger distances between the magnetic stirring machine and the magnetic stirring bar.



**HELPFUL:** page 293  
Detailed information on magnetic stirring

#### Square Magnetic Stirring Bars:

They are particularly suitable for big vessels due to the high magnetic force. Solids are released or removed from the bottom of the vessel.

#### Egg-Shaped Magnetic Stirring Bars:

They are particularly suitable for round-bottom flasks. Their shape mimics that of the flasks and assures complete mixing. Those magnetic stirring bars have an egg-shaped magnetic core which assures a better force transmission than a cylindrical core.

#### Triangular Magnetic Stirring Bars:

Such magnets are useful for mixing reagents which resist dissolving or for avoiding any residues at the bottom of the vessels. They provide strong turbulence at relatively low speeds.

#### Magnetic Stirring Bars with Pivot Ring:

Their interrupted surface provides greater surface area and added turbulence. Only their pivot ring and one end of the magnetic stirring bar touch the bottom of the vessel. Therefore these magnetic stirring bars have a more steady spinning position and a better longevity.

#### Star Head Magnetic Stirring Bars:

Optimum stirring in tall, narrow diameter vessels. Ideal stirring bar for cuvettes or test tubes.

#### Center Magnetic Stirring Bars:

These magnetic stirring bars provide better stirring action and a more stable spinning position due to the punctual position.



### Tolerances of the magnetic stirring bars

- » The dimensions of the magnetic stirring bars are nominal dimensions which can have a tolerance of +/- 5% in length and +/- 10% in diameter.



### We "meliorate" your specific magnetic stirring bars

- » These stirring bars can for example be built in devices or can be used for special applications
- » The diameter of the magnetic stirring bars can be machined with a tolerance of up to +/- 0,02 mm
- » The magnetic stirring bars are ground to obtain a seamless amplitude
- » The ends are polished to receive a round or any other shape
- » The surface is becoming extremely smooth and even, so that contaminations cannot adhere
- » Reproducibility both in diameter and surface are granted

### Results of stirring – tested for you

In order to help you choose the suitable magnetic stirring bar for your application, we have made tests with these data under real conditions. You will find graphs for each magnetic stirring bar on the next pages.

- » **Speed:** 500 rpm
- » **Volume:** 2.000 ml
- » **Product:** water
- » **Temperature:** 20°C
- » **Vessel:** glass beaker



## BOLA Cylindrical Magnetic Stirring Bars

**BESTSELLER**

Material: **PTFE**      Temperature resistance: **from -200 °C to +250 °C**      Chemical resistance: **+++ universal**

Product description:

PTFE-encapsulated magnetic core (Alnico 5), standard magnetic stirring bar, universal chemical resistance.




Length mm	Dia. mm	Cat. No.:	Length mm	Dia. mm	Cat. No.:
2	2	C 350-01	30	6	C 350-21
3	3	C 350-02	30	7	C 350-22
5	2	C 350-03	30	10	C 350-41
6	3	C 350-04	35	6	C 350-23
7	2	C 350-05	40	7	C 350-24
8	2	C 350-06	40	8	C 350-25
8	3	C 350-07	40	10	C 350-26
10	3	C 350-08	45	8	C 350-27
10	6	C 350-09	50	7	C 350-28
12	4,5	C 350-10	50	8	C 350-29
13	3	C 350-11	55	12	C 350-30
15	2	C 350-12	60	7	C 350-31
15	4,5	C 350-13	60	9	C 350-32
15	6	C 350-14	70	9	C 350-33
20	3	C 350-15	70	13	C 350-34
20	6	C 350-16	80	10	C 350-35
20	7	C 350-17	110	27	C 350-36
25	5	C 350-18	120	12	C 350-37
25	6	C 350-19	127	12	C 350-38
25	7	C 350-20	155	27	C 350-39

**Applications:**

Cylindrical magnetic stirring bars offer excellent centering and smooth running characteristics.

Special Request?  
+49 (0) 9346-9286-0

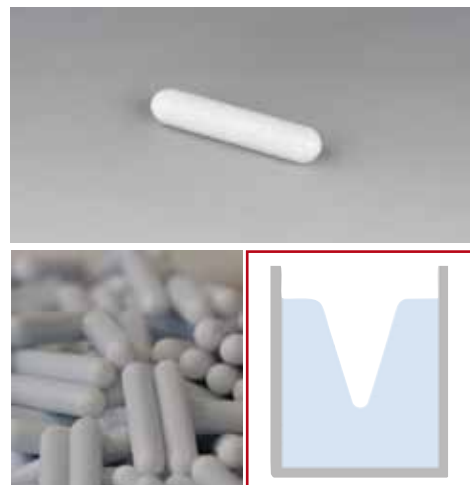

## BOLA Square Magnetic Stirring Bars

Material: **PTFE**      Temperature resistance: **from -200 °C to +250 °C**      Chemical resistance: **+++ universal**

Product description:

PTFE-encapsulated magnetic core (Alnico 5), universal chemical resistance.



Dimensions mm	Cat. No.:
14 x 14 x 45	C 361-03
14 x 14 x 90	C 361-06

**Applications:**

They are particularly suitable for big vessels, strong turbulences at low speed; solids are released or even avoided.



## BOLA Magnetic Stirring Bars with Pivot Ring

Material: PTFE  
 Temperature resistance: from -200 °C to +250 °C  
 Chemical resistance: +++ universal

Product description:


PTFE-encapsulated magnetic core (Alnico 5), cylindrical shape with pivot ring, universal chemical resistance.

FDA conform

Length mm	Dia. mm	Cat. No.:	Length mm	Dia. mm	Cat. No.:
8	3	C 354-02	35	6	C 354-20
12	5	C 354-05	40	8	C 354-23
15	5	C 354-08	45	8	C 354-26
20	6	C 354-11	50	8	C 354-29
25	6	C 354-14	60	9	C 354-32
30	6	C 354-17	70	9	C 354-35

### Applications:

They provide a bigger surface area. Very steady spinning position with additional turbulences.



### BOLA Practical Tip

Uwe Hossfeld » application engineering

#### Removing magnetic stirring bars

Even for aggressive liquids you can use our magnetic stirring bar retriever which is also available with a very strong magnet.

see page 58

## BOLA Magnetic Stirring Bar Set

Material: PTFE  
 Temperature resistance: from -200 °C to +250 °C  
 Chemical resistance: +++ universal

Product description:

Consisting of the most common magnetic stirring bars and a retriever with a length of 150 mm. Each one piece of:

Cylindrical 10 x 6, 15 x 4,5, 20 x 6, 25 x 6, 30 x 6, 40 x 8, 50 x 8, 60 x 9;

Pivot ring 15 x 5, 25 x 6, 40 x 8;

Triangular 25 x 8, 40 x 14

FDA conform

Dimensions of box mm	Cat. No.:
175 x 110 x 30	C 348-10

### Applications:

Ideal for beginners, for testing different kinds and dimensions of magnetic stirring bars.



## BOLA Triangular Magnetic Stirring Bars

Material: PTFE Temperature resistance: from -200 °C to +250 °C Chemical resistance: +++ universal


Product description:  
PTFE-encapsulated magnetic core (Alnico 5), universal chemical resistance.

FDA conform

Length mm	Dia. mm	Edge length mm	Cat. No.:
12	8	6	C 357-03
20	8	8	C 357-06
25	8	8	C 357-09
25	14	15	C 357-12
35	10	10	C 357-15
40	14	15	C 357-18
50	12	12	C 357-21
55	14	15	C 357-24
80	17	16	C 357-27
130	38	44	C 357-30

### Applications:

For big vessels, strong turbulence at relatively low speeds. Useful for mixing reagents which resist dissolving or for avoiding any residues at the bottom of the vessels.



## BOLA Egg-Shaped Magnetic Stirring Bars

Material: PTFE Temperature resistance: from -200 °C to +250 °C Chemical resistance: +++ universal

Product description:  
PTFE-encapsulated magnetic core (Alnico 5), universal chemical resistance.

FDA conform

Length mm	Dia. mm	Suitable for round bottom flasks (DIN 12 348) ml	Cat. No.:
20	10	25	C 358-02
25	12	50	C 358-04
30	15	100	C 358-06
35	15	250	C 358-08
40	20	500	C 358-10
50	20	1.000	C 358-12
65	20	4.000	C 358-14
70	20	10.000	C 358-16

### Applications:

Ideal for stirring in round bottom flasks. Shape mimics that of the flasks and assures complete mixing.





## BOLA Power Magnetic Stirring Bars

Material: PTFE      Temperature resistance: from -200 °C to +250 °C      Chemical resistance: +++ universal

### Product description:


PTFE-encapsulated magnetic core made of a very strong magnetic material (rare earth magnet samarium-cobalt), torque loads transmitted are about 4 times larger than those of conventional magnetic stirring bars. No risk of demagnetization, sterilisable, extremely smooth surface avoiding contaminations, universal chemical resistance.

FDA conform

Length mm	Dia. mm	Cat. No.:
20	8	C 365-20
40	14	C 365-40
50	19	C 365-50

### Applications:

They are mainly used for agitating viscous liquids or for bridging larger distances between the magnetic stirring machine and the magnetic stirring bar. Optimum mixing in vessels with a big volume or in tall graduated cylinders.



## BOLA INNOVATION

### Power Magnetic Stirring Bars

The Samarium-Cobalt rare-earth magnet is encapsulated in PTFE. Compared with common magnetic stirring bars, its torque is four times higher. These stirring bars are ideal for mixing highly viscous liquids.

## BOLA Ultra Magnetic Stirring Bars

Material: PTFE      Temperature resistance: from -200 °C to +250 °C      Chemical resistance: +++ universal

### Product description:


PTFE-encapsulated magnetic core (Alnico 5), extremely smooth and seamless surfaces, no substance can penetrate, universal chemical resistance.

FDA conform

Length mm	Dia. mm	Cat. No.:
10	6	C 353-10
15	5	C 353-15
20	7	C 353-20
25	5	C 353-25
30	5	C 353-30
40	7	C 353-40

### Applications:

They are mainly used for high-purity work or trace analysis.





## BOLA Magnetic Stirring Bar Retrievers

**BESTSELLER**

Material: PTFE      Temperature resistance: from -200 °C to +250 °C      Chemical resistance: +++ universal

Product description:

PTFE-encapsulated stirring bar retriever with strong permanent magnet (Alnico 5), universal chemical resistance.



FDA conform

Length mm	Lower end dia. mm	Bar dia. mm	Cat. No.:
150	10	8	C 372-02
200	10	8	C 372-04
250	10	8	C 372-06
300	10	8	C 372-08
350	10	8	C 372-10
400	10	8	C 372-12
600	10	8	C 372-18

### Applications:

For the removal of stirring bars from aggressive liquids, prevents loss of stirring bars.



## BOLA Jumbo Magnetic Stirring Bar Retrievers

Material: PTFE      Temperature resistance: from -200 °C to +250 °C      Chemical resistance: +++ universal

Product description:

PTFE-encapsulated stirring bar retriever with extra strong permanent magnet (Neodym), universal chemical resistance.

FDA conform

Length mm	Lower end dia. mm	Bar dia. mm	Cat. No.
700	16	12	C 371-16

### Applications:

For the removal of stirring bars from aggressive liquids. Especially for big and heaving stirring bars up to 400 g.



## BOLA Glass Magnetic Stirring Bars

Material: **Glass**      Temperature resistance: **from -200 °C to +250 °C**      Chemical resistance: **+++ universal**

Product description:


Magnetic core (Alnico 5) encapsulated in borosilicate glass, cylindrical shape, extremely smooth surface prevents from penetration of substances, non-porous, non-contaminating, universal chemical resistance.

FDA conform

Length mm	Dia. mm	Cat. No.:
15	8	C 351-03
20	8	C 351-06
25	8	C 351-09
30	8	C 351-12
40	8	C 351-15
55	8	C 351-19

**Applications:**

They are mainly used for high-purity work or trace analysis.



## BOLA Colour Magnetic Stirring Bars

Material: **PTFE**      Temperature resistance: **from -200 °C to +250 °C**      Chemical resistance: **+++ universal**


Product description:

Magnetic core (Alnico 5) encapsulated with coloured PTFE, universal chemical resistance.

Length mm	Dia. mm	Colour	Cat. No.:
13	8	yellow	C 368-08
25	8	yellow	C 368-12
38	8	yellow	C 368-16
50	8	yellow	C 368-20
13	8	blue	C 368-28
25	8	blue	C 368-32
38	8	blue	C 368-36
50	8	blue	C 368-40
13	8	red	C 368-48
25	8	red	C 368-52
38	8	red	C 368-56
50	8	red	C 368-60

**Applications:**

For better distinction.



## BOLA Star Head Magnetic Stirring Bars

Material: PTFE      Temperature resistance: from -200 °C to +250 °C      Chemical resistance: +++ universal


Product description:  
PTFE-encapsulated magnetic core (Alnico 5), universal chemical resistance.

FDA conform

	Dia. mm	Height mm	Cat. No.:
	10	8	C 360-04
	14	10	C 360-07
	17	13	C 360-10
	22	15	C 360-13
	30	12	C 360-16
	35	12	C 360-19
	40	14	C 360-22
	58	15	C 360-25

### Applications:

Optimum stirring in tall, narrow diameter vessels due to symmetrical fins on both sides. Ideal stirring bar for cuvettes or test tubes.

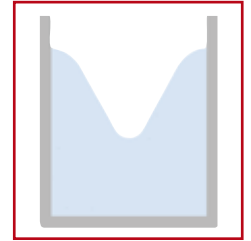

### BOLA Practical Tipp

Uwe Hossfeld » application engineering

#### Your magnetic stirring bar flutters?

To prevent this, the lengths of driving magnet in the stirrer and stirring bar should be approximately the same. In addition, the distance between these two should be as small as possible.

## BOLA Dumbbell-Shaped Magnetic Stirring Bars

Material: PTFE      Temperature resistance: from -200 °C to +250 °C      Chemical resistance: +++ universal


Product description:  
PTFE-encapsulated magnetic core (Alnico 5), universal chemical resistance.

FDA conform

	Length mm	Dia. of discs mm	Cat. No.:
	37	20	C 359-03
	55	20	C 359-06

### Applications:

Stable discs on both sides provide an excellent stirring.



## BOLA Center Magnetic Stirring Bars

Material: PTFE  
 Temperature resistance: from -200 °C to +250 °C  
 Chemical resistance: +++ universal

Product description:


PTFE-encapsulated magnetic core (Alnico 5), conically tapered ends, universal chemical resistance.

FDA conform

Length mm	Dia. mm	Cat. No.:
20	7	C 367-20
30	8	C 367-30
40	8	C 367-40
50	8	C 367-50

### Applications:

Extremely steady mixing due to small center seat.



**HELPFUL:** page 293  
 Detailed information on  
 magnetic stirring

## BOLA Crosshead Magnetic Stirring Bars

Material: PTFE  
 Temperature resistance: from -200 °C to +250 °C  
 Chemical resistance: +++ universal

Product description:


PTFE-encapsulated magnetic core (Alnico 5), universal chemical resistance.

FDA conform

Length x Width mm	Height mm	Cat. No.:
10 x 10	5	C 369-10
19 x 19	9	C 369-19
25 x 25	13	C 369-25
32 x 32	14	C 369-32
38 x 38	15	C 369-38

### Applications:

Safe and quiet mixing, optimum stirring due to stable position



## BOLA Chamfer Magnetic Stirring Bars

Material: PTFE Temperature resistance: from -200 °C to +250 °C Chemical resistance: +++ universal

Product description:

PTFE-encapsulated magnetic core (Alnico 5), crosswise chamfered top side, flat bottom, universal chemical resistance.

**NEW**

FDA conform

Diameter mm approx.	Height mm approx.			Cat. No.:
9	6			C 356-02

**Applications:**

Ideal for the use in 10 mm-tubes. The crosswise chamfers on the top side work like a baffle and provide good mixing.



## BOLA Ball Magnetic Stirring Bars

Material: PTFE Temperature resistance: from -200 °C to +250 °C Chemical resistance: +++ universal

Product description:

PTFE-encapsulated magnetic core (Alnico 5), universal chemical resistance.

**NEW**

FDA conform

Diameter mm approx.				Cat. No.:
12				C 355-02

**Applications:**

The spherical form is ideal for the use in narrow vessels like e. g. test tubes. When used in beakers, the ball magnetic stirring bar is pushed to the vessel wall by the centrifugal forces for good eccentric stirring.



## BOLA Star Magnetic Stirring Bars

Material: PTFE Temperature resistance: from -200 °C to +250 °C Chemical resistance: +++ universal

Product description:

PTFE-encapsulated magnetic core (Alnico 5), universal chemical resistance.

**NEW**

FDA conform

Length x width mm approx.	Height mm approx.			Cat. No.:
9 x 9	6			C 352-02
10 x 10	6			C 352-04
20 x 20	10			C 352-06
30 x 30	12			C 352-08

**Applications:**

The belly form allows good centering in narrow round-bottom vessels, the four arms provide even and smooth mixing.



## BOLA Magnetic Stirring Bars with Blade

Material: PTFE  
 Temperature resistance: from -200 °C to +250 °C  
 Chemical resistance: +++ universal

Product description:

PTFE-encapsulated magnetic core (Alnico 5), tapered blade with fixed cylindrical stirring bar, universal chemical resistance.


**NEW**

FDA conform

Length x width mm approx.	Height mm approx.	For vessel I. D. mm	Cat. No.:
5,5 x 5,5	9	6 - 7	C 349-02
8,0 x 8,0	11	9 - 10	C 349-04
10,0 x 10,0	16	11 - 12	C 349-06

**Applications:**

Perfectly suitable for the use in test tubes or vessels with tapered bottom. Triangular blade for centric position in the vessel and good mixing.

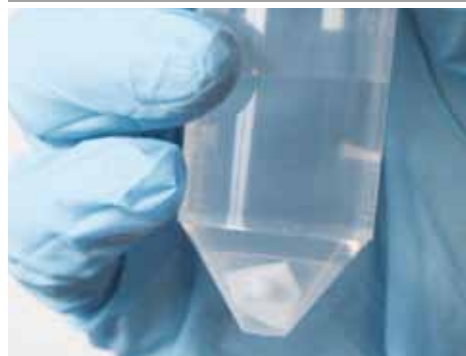

## BOLA Beakerliner

Material: PTFE  
 Temperature resistance: from -200 °C to +250 °C  
 Chemical resistance: +++ universal  
 Vacuum: suitable  
 autoclave: 121°

Product description:

PTFE-encapsulated magnetic core (Alnico 5) axially mounted in a guide cage made of PTFE, universal chemical resistance.

FDA conform

**NEW**

**NEW**

**NEW**

**NEW**

**NEW**

**NEW**

for Beakers low from ml	cage O.D. mm	cage height mm	stirring bar length mm	Cat. No.
5, 10	15	8,5	10 x 3	C 362-02
25	25	10	20 x 3	C 362-04
50, 100	30	12,5	25 x 5	C 362-05
150, 250	47	17,5	35 x 6	C 362-07
400	67	21	50 x 8	C 362-08
600	74	28	60 x 9	C 362-12
800, 1.000	85	28	70 x 9	C 362-14
2.000	103	32	80 x 10	C 362-16
3.000, 5.000	125	48	106 x 25	C 362-20
10.000	185	50	155 x 26	C 362-24

**Applications:**

No shear action on the bottom of the beaker, smooth running in glass beakers also on an uneven bottom. The cage acts like a baffle and thus provides optimum mixing results.



### BOLA INNOVATION

**Beakerliner**

A magnetic stirring bar mounted in a guide cage prevents shear action on the bottom of the beaker. The liquid is mixed carefully. Easy handling since the cage can easily be inserted or removed.

## BOLA Tandem Magnetic Stirring Bars

Material: **PTFE**      Temperature resistance: **from -200 °C to +250 °C**      Chemical resistance: **+++ universal**

Product description:


PTFE-encapsulated magnetic cores (Alnico 5), center bore for receiving the BOLA Bearing Neck or a glass neck (available from a glassblower), universal chemical resistance. Bearing neck not included in delivery.

FDA conform

Magnetic stirring bar length x O.D. mm	Bearing neck dia. mm	Recommended height of neck mm	Block dimensions mm	Cat. No.:
40 x 10	8	15	34 x 14 x 14	<b>C 363-26</b>
55 x 12	8	19	44 x 18 x 14	<b>C 363-30</b>
110 x 24	12	37	84 x 36 x 36	<b>C 363-36</b>
155 x 24	12	37	84 x 36 x 36	<b>C 363-39</b>

### Applications:

Extremely strong mixing of the product, ideal transmission of the magnetic force of the stirrer to the tandem magnetic stirring bar. Reduction of running surface to a ring minimizes friction and increases lifespan. Tandem magnetic stirring bars do not touch the bottom and therefore do not wear.



## BOLA Bearing Necks

Material: **PTFE - Compound**      Temperature resistance: **from -100 °C to +240 °C**      Chemical resistance: **+++ universal**

Product description:

Very hard PTFE-PEEK compound, for receiving a BOLA Tandem Magnetic Stirring Bar, center fixing on the bottom of the vessel by means of glue (we recommend silicone; hardened in water), universal chemical resistance.

FDA conform

Dia. of neck mm	Lower dia. mm	Usable height mm	Suitable for Cat. No.:	Cat. No.:
8	25	19	C 363-26 and C 363-30	<b>C 364-08</b>
12	25	37	C 363-36 and C 363-39	<b>C 364-16</b>





## BOLA Culture Bottles

Material: PTFE, PP  
 Temperature resistance: from -0 °C to +250 °C  
 Chemical resistance: ++ very good

Product description:

- » Bottle made of borosilicate glass
- » Screw cover for center neck made of PP with glass fibre
- » Screw caps for sidearms made of PPS
- » Stirrer made of PTFE and stainless steel is continuously adjustable in height from the outside
- » Complete unit can be sterilized
- » Universal chemical resistance
- » Suitable for both low and high speeds (max. 1000 rpm)

FDA conform

Usable volume ml	I.D. of center neck mm	Thread of bottle GL	Thread of sidearms GL	Cat. No.:
50	30	45	2 x 14	C 420-03
125	30	45	2 x 18	C 420-05

Applications:

- » Stirring unit is driven by a common magnetic stirrer
- » Magnetism causes rotation
- » For gentle mixing of cell cultures
- » The sidearms can be connected to tubing, probes or sensors (suitable laboratory screw joints can be found on page 71)



## BOLA Tweezers

Material: PTFE  
 Temperature resistance: from -200 °C to +250 °C  
 Chemical resistance: +++ universal

Product description:

Precast tweezers made of PTFE with pointed or blunt ends. Universal chemical resistance.

FDA conform

A	Length mm			Pointed end Cat. No.:
	100			H 909-02
	150			H 909-04
	200			H 909-06
B	Length mm			Blunt end Cat. No.:
	100			H 912-02
	150			H 912-04
	200			H 912-06



## BOLA Double Spatulas

Material: **PTFE**      Temperature resistance: **from -200 °C to +250 °C**      Chemical resistance: **+++ universal**

Product description:

Spatulas made of PTFE with tapered ends. Universal chemical resistance.

FDA conform

Length mm	Width of ends mm	Cat. No.:
120	16	H 915-02
150	16	H 915-04
180	16	H 915-06



Special Request?  
+49 (0) 93 46-92 86-0

## BOLA Scrapers

Material: **PTFE**      Temperature resistance: **from -200 °C to +250 °C**      Chemical resistance: **+++ universal**

Product description:

Scrapers made of PTFE with tapered end. Ideal handling due to big handle and wide blade. Universal chemical resistance.

FDA conform


Total length mm	Width of blade mm	Dia. of handle mm	Cat. No.:
160	50	20	H 916-02
200	90	20	H 916-06
200	120	20	H 916-08

**Applications:**

For a very gentle peeling of products.



## Screw Joints / Components with GL-Threads

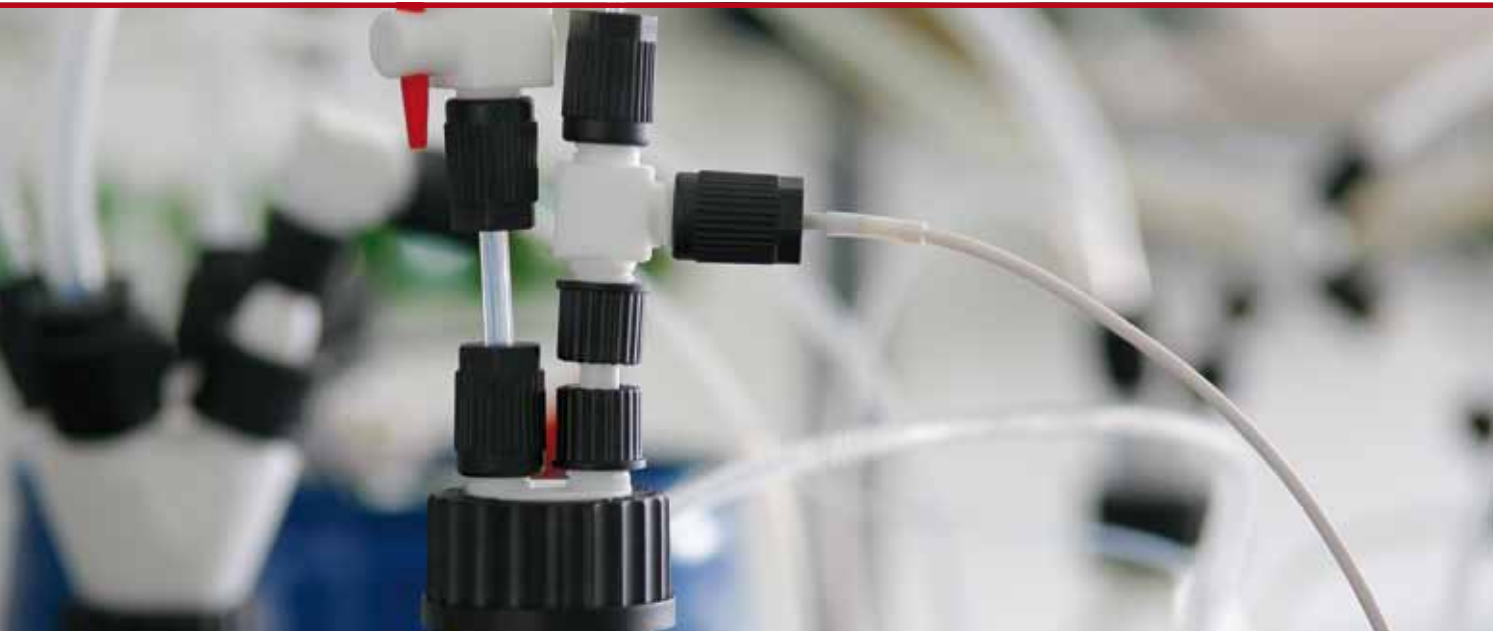

67

SCREW JOINTS / COMPONENTS WITH GL THREAD

Tailored equipment in a few quick and incomplex steps:  
with easily combinable screw joint elements from  
BOLA you can flexibly react to all current requirements.

### PRODUCT TIPS



Page 76:  
Multiple Distributors  
for Bottles



Page 71:  
Laboratory Screw  
Joints HT (High Temp)



Page 80:  
Flexible Distributors

# The Modular Construction System

## What you should know about the GL screw joint system.

A universal screw joint system, developed for connecting tubes or tubing (PTFE, PFA, FEP) with glass or metal tubes. The system provides a pressure resistance of up to 10 bar at room temperature.

The universal chemical resistance of the fluoroplastic materials allows the application of the GL screw joint components with almost every liquid and gas.

The fittings and stopcocks are made of pure PTFE. Assembled with the BOLA Laboratory Screw Joints HT, they are resistant to temperatures up to +250°C.

You can combine different components with GL thread to create a complete equipment:


### e.g. Basic Scrubber Bottle

- A** GL Bellow  
Cat. No.: H 902-05  
see page 103
- B** GL Tube Fitting Elbow  
Artikel-Nr.: D 539-25  
see page 107
- C** GL Stopcock  
Cat. No.: E 684-14  
see page 110
- D** GL Tube Fitting T  
Cat. No.: D 540-14  
see page 106
- E** Reducing Screw Thread  
Adaptor Coupling  
Cat. No.: H 904-03  
see page 103



### e.g. Sampling Unit

- A** GL Ball Valve  
Cat. No.: E 664-10  
see page 111
- B** Threaded Coupling  
Cat. No.: H 900-01  
see page 102
- C** Multiple Distributor for Bottles  
Cat. No.: D 614-08  
see page 76
- D** GL Ball Valve  
Cat. No.: E 667-10  
see page 111
- E** GL Tube Fitting Elbow  
Cat. No.: D 539-14  
See page 107

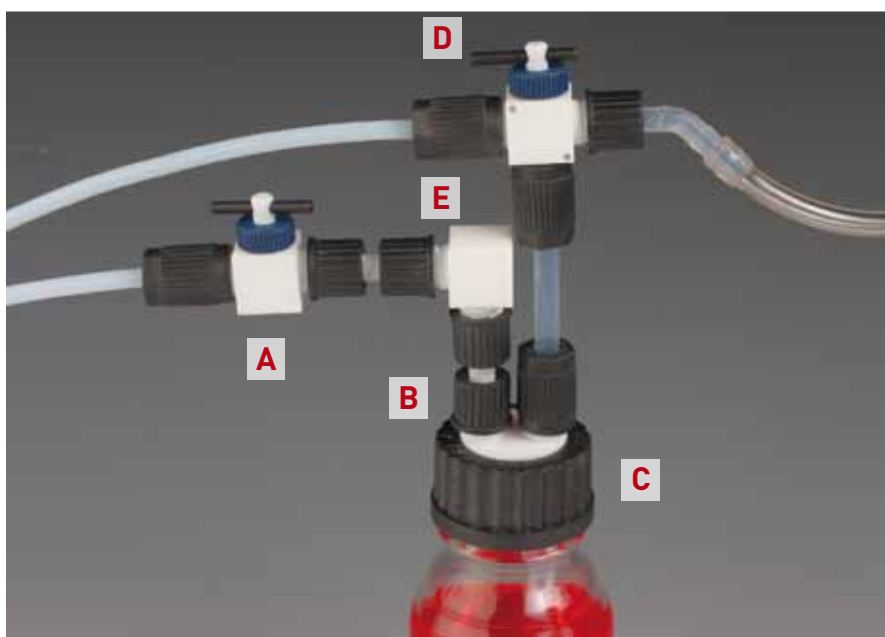


**All advantages at a glance:**


- » easily screwable without any tooling
- » optionally extensible
- » independent from tubing diameters
- » compatible with glass equipment with GL thread
- » many creative possibilities
- » no determination at the beginning of assembly

e.g. **Dosing Column**

- A** Reducing Screw Thread  
Adaptor Coupling  
Cat. No.: H 904-03  
see page 103
- B** GL Stopcock  
Cat. No.: E 684-14  
see page 110
- C** Laboratory Screw Joint HT  
Cat. No.: D 628-82  
see page 73
- D** Flexible Tubing  
Cat. No.: S 1822-20  
see page 154

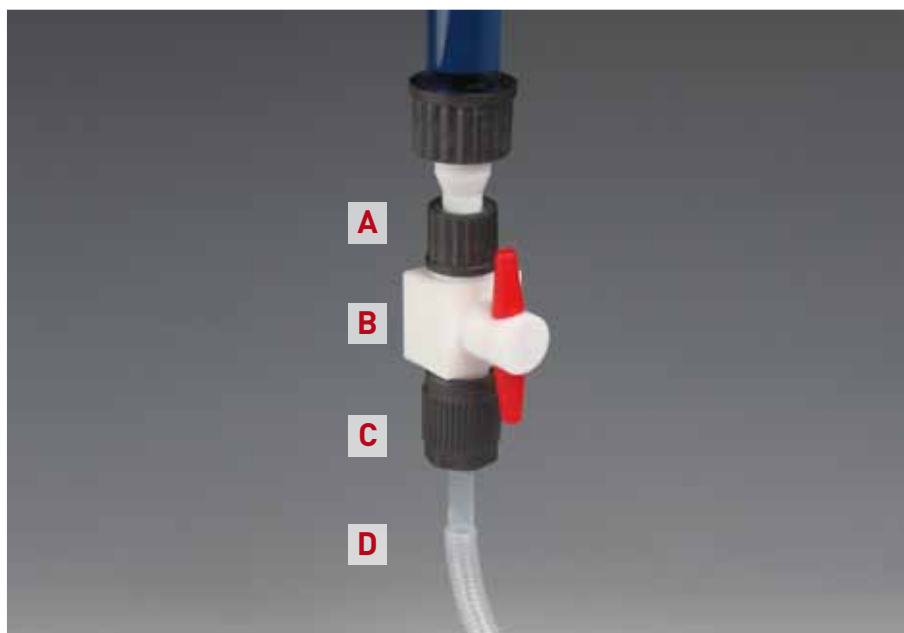e.g. **Basic Distillation**

- A** Reducing Screw Thread  
Adaptor Coupling  
Cat. No.: H 904-05  
see page 103
- B** Ground Joint Stirrer Bearings  
Cat. No.: C 424-13  
see page 38
- C** GL Tube Fitting T  
Cat. No.: D 540-14  
see page 106
- D** Reducing Screw Thread Adaptor Couplings  
Cat. No.: H 904-02  
see page 103
- E** Laboratory Screw Joint HT  
Cat. No.: D 628-74  
see page 73
- F** GL Stopcock  
Cat. No.: E 684-14  
see page 110


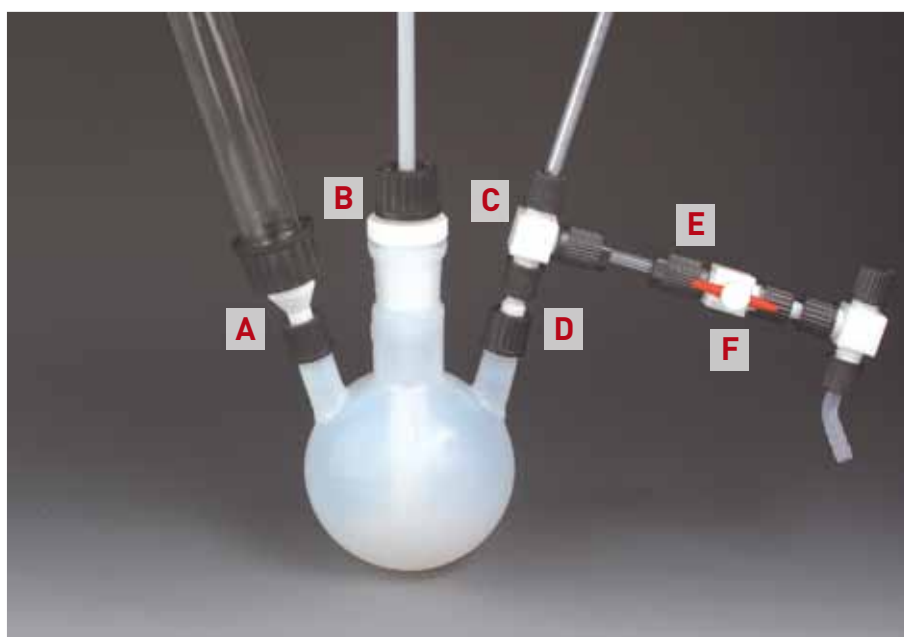


## The GL Screw Joint System



### Component parts:

- A** GL-threaded neck
- B** Sealing ring
- C** Tapered ring
- D** V-ring
- E** Screw cap with internal cone
- F** Tubing or tube
- G** Tapered ring with O-Ring behind PTFE sealing lip (only for screw joints for tubing dia. under 3 mm)

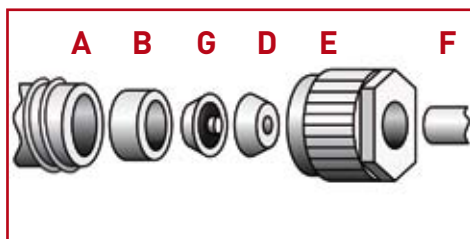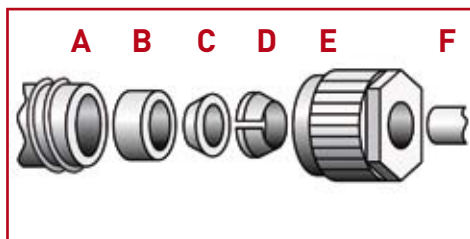

### Assembly:

1. Push the screw cap on the tubing/tube
2. Push V-ring, tapered ring and then sealing ring on the tubing/tube
3. Tighten the screw cap on the GL-threaded neck – ready

### How to make your order:

A screw joint always consists of two elements

1. Fitting (straight, elbow, T-shape or a GL thread of a glass device)
2. Laboratory screw joint as connection between fitting and tubing/tube

### Example 1:



If you want to connect three tubes/ tubings with O.D. 6 mm you will need:

- A** 1 piece of GL Tube Fitting T GL 14 – Cat. No. D 540-14, see page 106
- B** 3 pieces of Laboratory Screw Joints HT GL 14 for tubing O.D. 6 mm, Cat. No. D 628-74, see page 73

### Example 2:



If you want to connect tubing with different O.D. (2 mm and 6 mm) in an angle of 90°, you will need:

- A** 1 piece of GL Tube Fitting Elbow GL 14 – Cat. No. D 539-14, see page 107
- B** 1 piece of Laboratory Screw Joints HT GL 14 for tubing O.D. 6 mm, Cat. No. D 628-74, see page 73
- C** 1 piece of Laboratory Screw Joints HT GL 14 for tubing O.D. 2 mm, Cat. No. D 628-34, see page 73

# BOLA Laboratory Screw Joints

In practice, there are many applications where it is necessary to connect hard-walled tubing (e.g. made of PTFE, PFA, FEP) or tubes (e.g. made of glass, metal, plastic) with devices with GL thread (glass thread). BOLA Laboratory Screw Joints are ideal for making these connections.

## Components

Each laboratory screw joint consists of a screw cap with a female GL thread and bore as well as three inner parts: v-ring, tapered ring and sealing ring

## Assembly and function

Assembly can easily be made by hand:

First, the screw cap and the inner parts are pushed on the tubing in the right order. After that, the tubing has to be put into the counterpiece and the screw cap has to be tightened. The screw cap presses the sealing ring and tapered ring tightly on the counterpiece. At the same time, the v-ring is compressed and the tubing is fixed tightly. The connection is absolutely tight and even suitable for vacuum. The laboratory screw joints for GL 14, GL 18 and GL 25 resist pressures of max. 10 bar at room temperature.

## Choice

It is easy to choose the suitable laboratory screw joint:

First of all, the outer diameter of the tubing or tube and the size of the GL thread to which the laboratory screw joint shall be connected have to be determined. The size of the GL thread corresponds to the outer diameter of the thread, i.e. a GL 25 thread has an outer diameter of 25 mm. Further assistance for the determination of threads can be found in our Technical Information (page 273).

Also the application is decisive: Will there be temperatures of more than +150°C? If so, the BOLA HT Laboratory Screw Joints made of PPS black (page 73), which also provide a good chemical resistance, are the right choice. Or is it more important to have a very high chemical resistance? Then you have to choose BOLA Laboratory Screw Joints (page 71) made of ETFE (red). These can be used up to temperatures of +150°C.

For big flexibility, all screw caps and inner parts are available separately.

You will find suitable tubing on page 149.

## BOLA Laboratory Screw Joints

Material:	Temperature resistance:	Chemical resistance:	Pressure:	Vacuum:
PTFE, ETFE	from -50 °C to +150 °C	+++ universal	10 bar	suitable

### Product description:



Red screw cap made of glass-fibre reinforced ETFE, inner parts consisting of a v-ring (ETFE), a tapered ring and a sealing ring (both PTFE) as well as an o-ring (for tubing diameters under 3 mm, not exposed to the medium). Very good chemical resistance, suitable for temperatures from -50°C to +150°C.

FDA conform

For tubing O.D. mm	Thread GL 14 Cat. No.:	Thread GL 18 Cat. No.:	Thread GL 25 Cat. No.:
(1/32") 0,8	D 593-02		
1,0	D 593-04		
(1/16") 1,6	D 593-06	D 593-26	
2,0	D 593-10	D 593-30	
2,4	D 593-12		
3,0	D 590-02	D 590-10	D 590-22
(1/8") 3,2	D 590-08	D 590-20	D 590-24
4,0	D 590-04	D 590-12	D 590-26
6,0	D 590-06	D 590-14	D 590-28
(1/4") 6,35	D 590-62		
8,0		D 590-16	D 590-30
10,0		D 590-18	D 590-32
12,0			D 590-34
14,0			D 590-36

### Applications:

Connecting equipment and fittings with GL threads with hard-walled tubing or tubes made of glass, plastic or metal. Fixing probes, thermometers, dip tubes or cables in reaction vessels. Ideal for use in aggressive ambience (e.g. with aggressive vapours or evaporation)

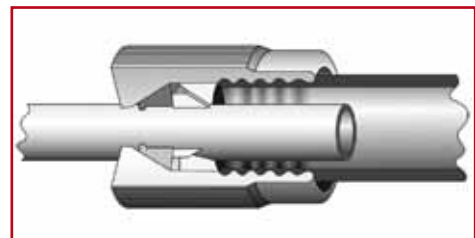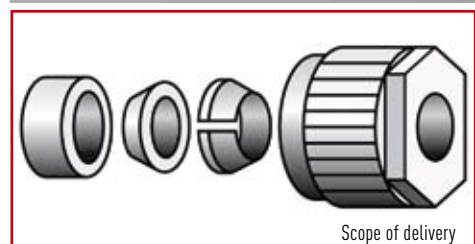

## BOLA Replacement Inner Parts


Material: <b>PTFE, ETFE</b>	Temperature resistance: <b>from -50 °C to +150 °C</b>	Chemical resistance: <b>+++ universal</b>	Pressure: <b>10 bar</b>	Vacuum: <b>suitable</b>
--------------------------------	--	--	----------------------------	----------------------------

Product description:

Consisting of a v-ring (ETFE), a tapered ring and a sealing ring (both PTFE) as well as an o-ring for tubing diameters under 3 mm (not exposed to the medium). Very good chemical resistance, suitable for temperatures from -50°C to +150°C.

FDA conform


For tubing O.D. mm	Thread GL 14 Cat. No.:	Thread GL 18 Cat. No.:	Thread GL 25 Cat. No.:
(1/32") 0,8	<b>D 598-02</b>		
1,0	<b>D 598-04</b>		
(1/16") 1,6	<b>D 598-06</b>	<b>D 598-26</b>	
2,0	<b>D 598-10</b>	<b>D 598-30</b>	
2,4	<b>D 598-12</b>		
3,0	<b>D 597-02</b>	<b>D 597-10</b>	<b>D 597-22</b>
(1/8") 3,2	<b>D 597-08</b>	<b>D 597-20</b>	<b>D 597-24</b>
4,0	<b>D 597-04</b>	<b>D 597-12</b>	<b>D 597-26</b>
6,0	<b>D 597-06</b>	<b>D 597-14</b>	<b>D 597-28</b>
(1/4") 6,35	<b>D 597-62</b>		
8,0		<b>D 597-16</b>	<b>D 597-30</b>
10,0		<b>D 597-18</b>	<b>D 597-32</b>
12,0			<b>D 597-34</b>
14,0			<b>D 597-36</b>



Scope of delivery

72

SCREW JOINTS / COMPONENTS WITH GL THREAD



**BOLA**  
**Practical Tip**

Victor Muschanowski » assembly

**For an easier assembly of laboratory screw joints:**  
Either sharpen the tubing with a simple sharpener or cut it diagonally with a knife.



**SUITABLE:** page 149  
Tubing for all screw joints.

## BOLA Replacement Caps

Material: <b>ETFE</b>	Temperature resistance: <b>from -50 °C to +150 °C</b>	Chemical resistance: <b>+++ universal</b>
--------------------------	--	--

Product description:

Red screw cap made of glass-fibre reinforced ETFE, with handy knurl and hexagon. Very good chemical resistance, suitable for temperatures from -50°C to +150°C.

Thread GL	Tubing/tube O.D. mm	Cat. No.:
14	up to 6,35	<b>D 600-04</b>
18	up to 10,0	<b>D 600-08</b>
25	up to 10,0	<b>D 600-12</b>
25	bigger than 10,1	<b>D 600-16</b>





## BOLA Laboratory Screw Joints HT (High Temp)

Material: PTFE, PPS    Temperature resistance: from -20 °C to +250 °C    Chemical resistance: +++ universal    Pressure: 10 bar    Vacuum: suitable

### Product description:



Black screw cap made of PPS, inner parts consisting of a v-ring (PPS), a tapered ring and a sealing ring (both PTFE) as well as an o-ring for tubing diameters under 3 mm (not exposed to the medium). Good chemical resistance, suitable for temperatures from -50°C to + 250°C.

FDA conform

For tubing O.D. mm	Thread GL 14 Cat. No.:	Thread GL 18 Cat. No.:	Thread GL 25 Cat. No.:	Thread GL 32 Cat. No.:	Thread GL 45 Cat. No.:
(1/32") 0,8	<b>D 628-10</b>				
1,0	<b>D 628-18</b>				
(1/16") 1,6	<b>D 628-26</b>	<b>D 629-18</b>	<b>D 630-18</b>		
2,0	<b>D 628-34</b>	<b>D 629-22</b>	<b>D 630-22</b>		
3,0	<b>D 628-50</b>	<b>D 629-34</b>	<b>D 630-34</b>		
(1/8") 3,2	<b>D 628-58</b>	<b>D 629-42</b>	<b>D 630-42</b>		<b>D 632-18</b>
4,0	<b>D 628-66</b>	<b>D 629-46</b>	<b>D 630-46</b>		
5,0	<b>D 628-70</b>				
6,0	<b>D 628-74</b>	<b>D 629-54</b>	<b>D 630-54</b>	<b>D 631-38</b>	<b>D 632-26</b>
(1/4") 6,35	<b>D 628-78</b>	<b>D 629-56</b>	<b>D 630-58</b>	<b>D 631-42</b>	
8,0	<b>D 628-82</b>	<b>D 629-62</b>	<b>D 630-62</b>	<b>D 631-46</b>	<b>D 632-32</b>
(3/8") 9,52		<b>D 629-68</b>	<b>D 630-68</b>	<b>D 631-52</b>	
10,0		<b>D 629-74</b>	<b>D 630-74</b>	<b>D 631-56</b>	<b>D 632-40</b>
12,0			<b>D 630-80</b>	<b>D 631-60</b>	<b>D 632-44</b>
(1/2") 12,7			<b>D 630-84</b>	<b>D 631-66</b>	
14,0			<b>D 630-90</b>	<b>D 631-72</b>	<b>D 632-48</b>
16,0				<b>D 631-78</b>	<b>D 632-54</b>
18,0				<b>D 631-82</b>	<b>D 632-56</b>
(3/4") 19,5				<b>D 631-84</b>	
20,0				<b>D 631-88</b>	<b>D 632-60</b>
22,0					<b>D 632-68</b>
(1") 25,4					<b>D 632-74</b>
26,0					<b>D 632-76</b>
30,0					<b>D 632-84</b>
32,0					<b>D 632-90</b>

### Applications:

Connecting equipment and fittings with GL threads with hard-walled tubing or tubes made of glass, plastic or metal. Fixing probes, thermometers, dip tubes or cables in reaction vessels.

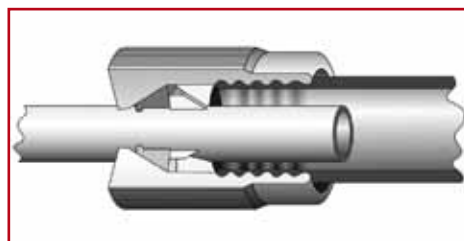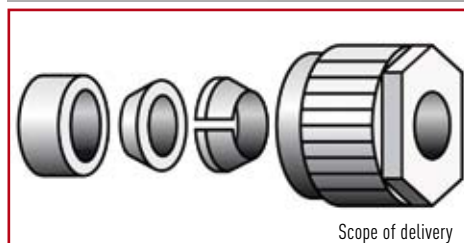

## BOLA INNOVATION

### One for many

Many common screw joints can only be used for one specific tubing diameter. BOLA Laboratory Screw Joints with exchangeable inner parts can be assembled with many different tubing diameters.



### Laboratory Screw Joints

» A quick assembly without any tools is important for us, also for connecting tubes. BOLA Screw Joints offer a high chemical resistance and are absolutely tight if assembled with BOLA tubing. «

Hans Kneuss » Glass Technology

## BOLA Replacement Inner Parts HT (High Temp)


Material: PTFE, PPS	Temperature resistance: from -20 °C to +250 °C	Chemical resistance: +++ universal	Pressure: 10 bar	Vacuum: suitable
------------------------	---	---------------------------------------	---------------------	---------------------

### Product description:

Consisting of a v-ring (PPS), a tapered ring and a seating ring (both PTFE) as well as an o-ring for tubing diameters under 3 mm (not exposed to the medium). Good chemical resistance, suitable for temperatures from -50 °C to + 250 °C.

FDA conform

For tubing O.D. mm	Thread GL 14 Cat. No.:	Thread GL 18 Cat. No.:	Thread GL 25 Cat. No.:	Thread GL 32 Cat. No.:	Thread GL 45 Cat. No.:
(1/32") 0,8	D 638-10				
1,0	D 638-18				
(1/16") 1,6	D 638-26	D 639-18	D 640-18		
2,0	D 638-34	D 639-22	D 640-22		
3,0	D 638-50	D 639-34	D 640-34		
(1/8") 3,2	D 638-58	D 639-42	D 640-42		D 642-18
4,0	D 638-66	D 639-46	D 640-46		
5,0	D 638-70				
6,0	D 638-74	D 639-54	D 640-54	D 641-38	D 642-26
(1/4") 6,35	D 638-78	D 639-56	D 640-58	D 641-42	
8,0	D 638-82	D 639-62	D 640-62	D 641-46	D 642-32
(3/8") 9,52		D 639-68	D 640-68	D 641-52	
10,0		D 639-74	D 640-74	D 641-56	D 642-40
12,0			D 640-80	D 641-60	D 642-44
(1/2") 12,7			D 640-84	D 641-66	
14,0			D 640-90	D 641-72	D 642-48
16,0				D 641-78	D 642-54
18,0				D 641-82	D 642-56
(3/4") 19,05				D 641-84	
20,0				D 641-88	D 642-60
22,0					D 642-68
(1") 25,4					D 642-74
26,0					D 642-76
30,0					D 642-84
32,0					D 642-90

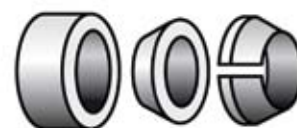

Scope of delivery

## BOLA Fork Wrenches

Material: PA	Temperature resistance: from -10 °C to +100 °C	Chemical resistance: + good
-----------------	---	--------------------------------

### Product description:

Made of glass-fibre reinforced polyamide, black, low weight

For thread GL	Wrench size mm	Cat. No.:
14/ 18/ 25	17/ 22/ 27	D 647-08
32/ 45	32/ 42	D 647-24

### Applications:

For tightening or opening BOLA Laboratory Screw Joints also at high working temperatures. Low weight reduces risk of injury or damage.



## BOLA Replacement Caps HT (High Temp)

Material: **PPS**      Temperature resistance: **from -20 °C to +250 °C**      Chemical resistance: **+ good**

Product description:

Black screw cap made of glass-fibre reinforced PPS, with handy knurl and hexagon. Good chemical resistance, suitable for temperatures from -50°C to + 250°C.

FDA conform

Thread GL	From tubing O.D. to tubing O.D. mm	Cat. No.:
14	0,8 - 6,0	D 634-10
14	6,1 - 8,0	D 634-14
18	0,8 - 10,0	D 634-20
25	0,8 - 10,0	D 634-30
25	10,1 - 14,0	D 634-34
32	0,8 - 10,0	D 634-40
32	10,0 - 16,0	D 634-44
32	18,0 - 20,0	D 634-48
45	1,6 - 10,0	D 634-50
45	11,0 - 16,0	D 634-54
45	17,0 - 22,0	D 634-58
45	23,0 - 32,0	D 634-62



## BOLA Plugs for Screw Caps

Material: **PTFE**      Temperature resistance: **from -200 °C to +250 °C**      Chemical resistance: **+++ universal**

Product description:


Plugs completely made of PTFE, suitable for replacement caps made of ETFE and PPS. The plug is inserted into the cap and snaps in as soon as the cap is tightened. It can easily be removed for cleaning.

FDA conform

Thread GL	Bore dia. mm	Suitable for cap Cat. No.:	Suitable for cap Cat. No.:	Cat. No.:
14	6	D 600-04	D 634-10	D 549-14
18	10	D 600-08	D 634-20	D 549-18
25	10	D 600-12	D 634-30	D 549-25
32	16		D 634-44	D 549-32
45	22		D 634-58	D 549-45

**Applications:**

Safe plugging of unused ports of glass devices or GL connecting parts.

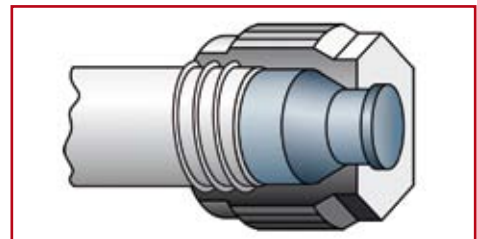



## BOLA Multiple Distributors for Bottles

How can liquids be taken out of a bottle or reaction vessel and simultaneously be distributed to several recipients without spillage? How can I pour different liquids into my vessel without loss? These questions were the beginning of BOLA Multiple Distributors for Bottles.

They consist of a screw cap with GL thread and a movable body with GL-threaded necks. These necks allow the connection and insertion of hard-walled tubing (e.g. PTFE, PFA, FEP see page 149) or tubes made of different materials (glass, metal, plastic) by means of BOLA Laboratory Screw Joints (see page 71).

The distributors are not only the basis of a distribution system which can be operated under pressure and vacuum. It is also possible to insert probes or electrodes into the GL-threaded necks and to fix them by means of laboratory screw joints. A possible unevenness of the bottle neck is adjusted by an o-ring behind an elastic sealing lip, and the bottle is closed tightly. The product is only exposed to the body of the distributor. The special feature: the body of the distributor can be turned independently from the screw cap. This means, that the completely assembled distributor can be removed and fixed on another bottle without the risk of disarranging the tubing.

### BOLA Multiple Distributors for Bottles

**BESTSELLER**

Material: <b>PFA, PTFE</b>	Temperature resistance: <b>from -20 °C to +200 °C</b>	Chemical resistance: <b>+++ universal</b>	Vacuum: <b>suitable</b>	autoclave: <b>121°</b>
-------------------------------	--	--	----------------------------	---------------------------

#### Product description:

Black screw cap made of PPS for bottle thread GL 45, body made of PTFE or PFA. Insertion of tubing with a max. O.D. of 8,5 mm. Very good chemical resistance, for working temperatures up to +200°C

**FDA conform**

Material	Necks GL	Cat. No.:
PFA	2 x 14	D 614-08
PTFE	3 x 14	D 615-08

Material: <b>PP</b>	Temperature resistance: <b>from 0 °C to +110 °C</b>	Chemical resistance: <b>++ very good</b>	Vacuum: <b>suitable</b>	autoclave: <b>121°</b>
------------------------	--	---	----------------------------	---------------------------

#### Product description:

Green screw cap made of PP for bottle thread GL 45 and body made of PP. Insertion of tubing with a max. O.D. of 8,5 mm. Restricted chemical resistance, for working temperatures up to +110°C.

**FDA conform**

Necks GL	Cat. No.:
2 x 14	D 612-08
3 x 14	D 613-08

#### Applications:

Drawing or inserting liquids. Inserting tubing, tubes and probes into vessels.



## BOLA Multiple Distributors with Stopcocks

Material: PTFE	Temperature resistance: from -20 °C to +110 °C	Chemical resistance: +++ universal	Pressure: 1 bar	autoclave: 121°
-------------------	---	---------------------------------------	--------------------	--------------------

Product description:


Black screw cap made of PPS for bottle thread GL 45, body made of PTFE. Each neck with stopcock. Tubing can not be inserted through the stopcocks. Bores with press fit on the lower side allow the connection of tubing with O.D. 6 mm so that a connection to the bottom can be made. Very good chemical resistance, for working temperatures up to +110°C

FDA conform

For tubing O.D. max. mm	Stopcocks	Stopcock bore dia. mm	Necks GL	Cat. No.:
8	2	4	2 x 14	D 616-08
8	3	4	3 x 14	D 616-16

**Applications:**

Drawing or inserting aggressive or pure liquids. Inserting tubing, tubes and probes into vessels.

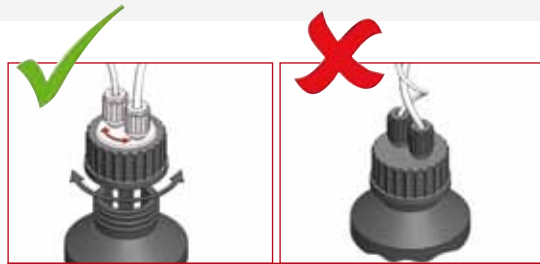

## BOLA Multiple Distributors with Stopcock

Material: PTFE	Temperature resistance: from -20 °C to +110 °C	Chemical resistance: +++ universal	Pressure: 1 bar	autoclave: 121°
-------------------	---	---------------------------------------	--------------------	--------------------

Product description:

Black screw cap made of PPS for bottle thread GL 45, body made of PTFE. One stopcock for all connectors. Very good chemical resistance.


**NEW**

FDA conform

For tubing O.D. max. mm	Stopcock bore dia. mm	Necks GL	Cat. No.:
8	8	4 x 14	D 617-08

**Applications:**

Drawing or inserting aggressive or pure liquids.

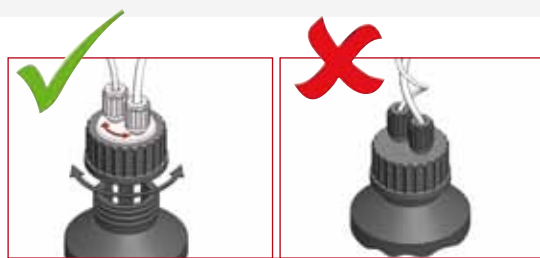

## BOLA Multiple Distributors for Bottles

Material:	Temperature resistance:	Chemical resistance:	Vacuum:	autoclave:
PTFE	from -20 °C to +200 °C	+++ universal	suitable	121°

Product description:

Blue screw cap made of PPS for bottle thread 38/430, body made of PTFE. One GL 18 neck for inserting tubing with a max. O.D. of 10 mm, additional opening for aeration with PTFE-membrane (2,5µm). Very good chemical resistance, for working temperatures up to max. +200°C.

FDA conform

For thread	For tubing O.D. max. mm	Necks	Cat. No.:
38/430	10	1 x GL 18 and aeration	D 650-08

Applications:

Drawing or inserting of aggressive or pure liquids. Inserting tubing, tubes and probes into vessels.



### Multiple Distributors for Bottles

»» The tight and safe assembly with suitable screw joints has convinced. And finally no disarranged tubing or tubes anymore.



Krzysztof Kucias » Hitec Zang GmbH



## BOLA INNOVATION

### Multiple Distributors for Bottles

The distributor body can be turned independently from the screw cap. This means that the completely assembled distributor can be removed and fixed on another vessel without the risk of disarranging the tubing.

## BOLA Multiple Distributors for Bottles

Material:	Temperature resistance:	Chemical resistance:	Vacuum:	autoclave:
PTFE	from -20 °C to +200 °C	+++ universal	suitable	121°

Product description:

Blue screw cap made of PPS for thread according to chart below. Body made of PTFE.

FDA conform

For thread	For tubing O.D. max. mm	Necks	Cat. No.:
33/430	2 x 8	2 x GL 14	D 651-04
38/430	2 x 6	2 x GL 14	D 651-08

Material:	Temperature resistance:	Chemical resistance:	Vacuum:	autoclave:
PP	from -0 °C to +110 °C	++ very good	suitable	121°

Product description:

Blue screw cap made of PPS for thread according to chart below. Body made of PP.

FDA conform

For thread	For tubing O.D. max. mm	Necks	Cat. No.:
38/430	2 x 6	2 x GL 14	D 652-08



## BOLA Multiple Distributors for Bottles

Material:	Temperature resistance:	Chemical resistance:	Vacuum:	autoclave:
PTFE, PPS	from -20 °C to +200 °C	+++ universal	suitable	121°

Product description:

Black screw cap made of PPS for thread according to chart below.  
Body made of PTFE

FDA conform

	For thread	For tubing O.D. max. mm	Necks	Cat. No.:
<b>A</b>	GL 25	2 x 6	2 x GL 14	D 619-04
	GL 25	3 x 6	3 x GL 14	D 619-08

	For thread	For tubing O.D. max. mm	Necks	Cat. No.:
<b>A</b>	GL 32	2 x 8	2 x GL 14	D 621-04
	GL 32	3 x 8	3 x GL 14	D 621-08

	For thread	For tubing O.D. max. mm	Necks	Cat. No.:
<b>A</b>	S 40	2 x 8	2 x GL 14	D 624-04
	S 40	3 x 8	3 x GL 14	D 624-08

	For thread	For tubing O.D. max. mm	Necks	Cat. No.:
<b>B</b>	GL 45	3 x 10	3 x GL 18	D 618-16
	GL 45	2 x 6 / 1 x 14	2 x GL 14 / 1 x GL 25	D 618-24
	GL 45	2 x 14	2 x GL 25	D 618-44
	GL 45	3 x 14	3 x GL 25	D 618-46
	GL 45	4 x 14	4 x GL 25	D 618-48

« »  
Special Request?  
+49 (0) 93 46-92 86-0






## BOLA Flexible Distributors

BOLA Flexible Distributors have especially been developed for the connection of elastic tubing such as silicone, Viton® or Tygon®. They consist of a screw cap for bottle thread GL 45 or GLS 80 and a free movable distributor body with hose connectors on the top and bottom side.

Elastic tubing can be easily put on the hose connectors for a continuous connection to the bottom of the bottle. Bent hose connectors prevent bends in the tubing.

The body of the distributor can be turned independently from the screw cap. This means, the tubing will not be disarranged when the distributor is fixed on another bottle.

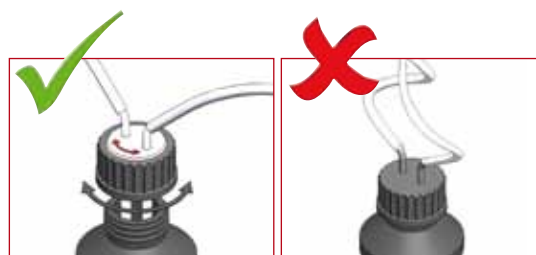

Material:	Temperature resistance:	Chemical resistance:	Vacuum:	autoclave:
PP	from -20°C to +110 °C	++ very good	suitable	121°

Product description:


Screw cap green made of PP for bottle thread GL 45 and distributor body with hose connectors made of PP. Bent hose connectors on the upper side, straight hose connectors on the bottom side. Restricted chemical resistance, for working temperatures up to max. +110 °C.

FDA conform

	Number of hose connectors	O.D. of hose connector mm	Bore of hose connectors mm	Cat. No.:
<b>NEW A</b>	2	8,8	6	D 800-24
<b>B</b>	3	8,8	6	D 800-36
<b>C</b>	2	10,8	7	D 800-48

**Applications:**

Drawing or inserting liquids. For elastic tubing (e.g. Viton®, Tygon®, silicone).

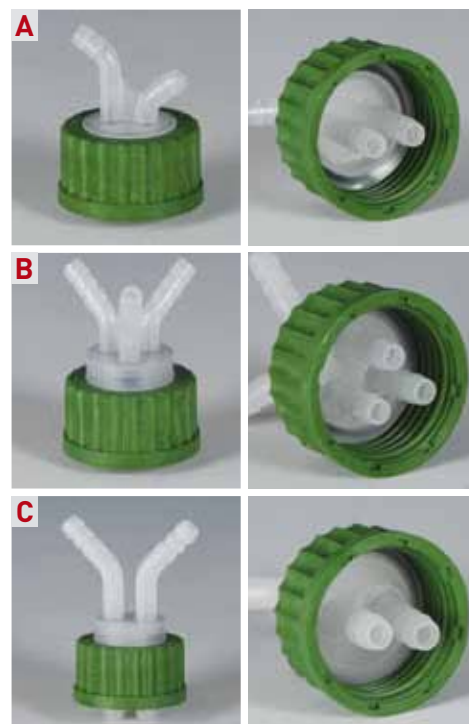



## BOLA Flexible Distributors

Material:	Temperature resistance:	Chemical resistance:	Vacuum:	autoclave:
PP, PBTP	from 0 °C to +110 °C	++ very good	suitable	121°

Product description:

Screw cap red made of PBTP for bottle thread GL 45 and distributor body with hose connectors made of PP. Three bent 2-step hose connectors on the upper side, two straight hose connectors on the bottom side. Restricted chemical resistance, for working temperatures up to +110 °C.

**NEW**

Number of hose connectors	2-step hose connectors		Bore of hose connectors mm	Cat. No.:
	O.D. 1	O.D. 2 mm		
3	9	12	6	D 802-24

FDA conform

### Anwendungen:

Entnehmen und Einfüllen von Flüssigkeiten. Für elastische Schläuche (z. B. Silikon, Viton® oder Tygon®).



Material:	Temperature resistance:	Chemical resistance:	Vacuum:	autoclave:
PP	from 0 °C to +110 °C	++ very good	suitable	121°

Product description:

Screw cap blue made of PP for bottle thread GLS 80 and distributor body with hose connectors made of PP. Bent 2-step hose connectors on the upper side, straight hose connectors on the bottom side. Restricted chemical resistance, for working temperatures up to max. +110 °C.


**NEW**

Number of hose connectors	2-step hose connectors		Bore of hose connectors mm	Cat. No.:
	O.D. 1	O.D. 2 mm		
A 2	9	12	6	D 804-06
B 3	9	12	6	D 804-12

FDA conform

### Applications:

Drawing or inserting liquids. For elastic tubing (e.g. Viton®, Tygon®, silicone).

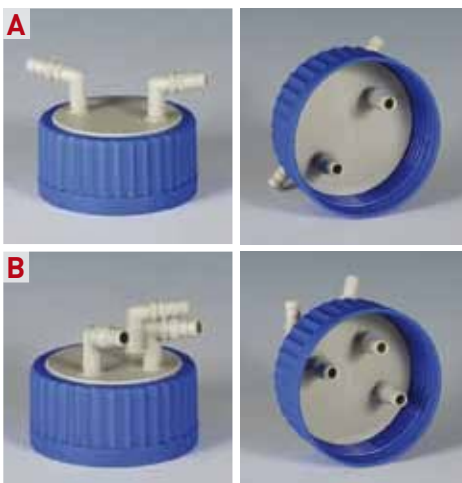

« »  
Special Request?  
+49 (0) 93 46-92 86-0



## BOLA GL Reductions

Material: PTFE, PPS    Temperature resistance: from -20°C to +250°C    Chemical resistance: +++ universal

Product description:

Black screw cap made of PPS with GL 45 thread, movable reduction body made of PTFE with O-Ring made of FPM for transition to GL threads. The body can be moved independently from the screw cap so that the completely assembled reduction can be removed and fixed on another vessel without the risk of disarranging the tubing or cable. The product is only exposed to PTFE.

FDA conform

**NEW**  
**NEW**  
**NEW**  
**NEW**

	From Cap GL	Reducing thread GL	For tubing-Ø mm	Cat. No.:
<b>A</b>	18	14	0,8 - 8	D 784-01
	25	14	0,8 - 8	D 784-03
	25	18	1,6 - 10	D 784-04
	32	18	1,6 - 10	D 784-06
	45	14	0,8 - 8	D 784-08
	45	18	1,6 - 10	D 784-16
	45	25	1,6 - 14	D 784-24

Material: PP, PBTP    Temperature resistance: from -20 °C to +110 °C    Chemical resistance: ++ very good

Product description:

Red screw cap made of PBTP, movable reduction body made of PP with O-Ring made of FPM for transition to GL threads. The body can be moved independently from the screw cap so that the completely assembled reduction can be removed and fixed on another vessel without the risk of disarranging the tubing or cable.

**NEW**

FDA conform

	From Cap GL	Reducing thread GL	For tubing-Ø mm	Cat. No.:
<b>B</b>	45	14	0,8 - 8	D 782-08
	45	18	1,6 - 10	D 782-16
	45	25	1,6 - 14	D 782-24

**Applications:**

For connecting or inserting tubing, tubes or probes.



## BOLA Threaded Adaptors

Material: PTFE    Temperature resistance: from -200°C to +200°C    Chemical resistance: +++ universal

Product description:

Allow the use of BOLA Multiple Distributors for Bottles (see page 76) with female thread GL 45 also on bottles with GL 32, GL 40 and S 40 threads.

Example 1 for Cat. No. H 978-30:

Transition from GL 32 to GL 45  
Suitable for bottles with GL 32 thread, e.g. from Duran Group (formerly Schott AG)

Example 2 for Cat. No. H 978-40:

Transition from GL40/S40 to GL 45  
Suitable for Merck® bottles with GL 40 thread or for all PFA-, PTFE bottles and jars with thread GL 40 and S 40

FDA conform

	Bottle thread GL / S	Top thread GL	Cat. No.:
<b>A</b>	GL 32	45	H 978-30
<b>B</b>	GL/S 40	45	H 978-40





## **BOLA offers custom manufacture.**

Every lab is different. By offering an extensive range of established and sophisticated standard solutions we take into account the varied requirements of the respective branches and sectors.

But maybe you are looking for something special? Something that is not included in our standard product range?

In that case we are able to offer an individual custom manufacture. This is easier and faster than you may expect. Discuss your idea with our professionals. They will give advise and support during design. Finally, your idea will become real: We produce as per your requirements and in compliance with the chosen raw materials – already from 1 piece.

We only need a drawing (a sketch is sufficient) and some further information

» **You have a special request?**

Give us a call: +49 (0) 93 46-92 86-0.



## BOLA Distributors for Reaction Vessels

Suitable for bottles with GLS 80 thread from Duran Group (formerly Schott AG).

Consisting of a screw cap with GLS 80 thread and a movable body with several lateral necks and one central neck.

The GL-threaded necks allow the connection of hard-walled tubing (PTFE, PFA, FEP) or tubes (glass, metal, plastic) by means of BOLA Laboratory Screw Joints (see page 71). It is also possible to insert and fix probes or electrodes. In addition, the connection of elastic tubing can be made by means of BOLA Hose Connectors (see page 114).

The type "Center Neck with Ground Joint" allows the use of a stirrer bearing which assures a central position of a stirrer shaft in the vessel. Other components with ground joint (e.g. condensers, funnels etc.) can also be connected easily.

The type "Center Neck with GL Thread" is supplied with an exchangeable stirrer bearing for the center neck.

A possible unevenness of the bottle neck is adjusted by an o-ring behind an elastic sealing lip, and the bottle is closed tightly. The product is only exposed to the body of the distributor. The special clou: the body of the distributor can be turned independently from the screw cap. This means that the completely assembled distributor can be removed and fixed on another bottle without the risk of disarranging the tubing.

### BOLA Distributors for Reaction Vessels (S)

Material: <b>PTFE, PP</b>	Temperature resistance: <b>from 0 °C to + 110°C</b>	Chemical resistance: <b>+++ universal</b>	Vacuum: <b>suitable</b>	autoclave: <b>121°</b>
------------------------------	--	--	----------------------------	---------------------------

#### Product description:

Blue screw cap made of PP with GLS 80 thread, body made of PTFE with center ground joint and lateral GL-threaded or ground joint necks. Very good chemical resistance, for working temperatures up to max. +200°C (PP screw cap max. +110°C)

FDA conform

GL	Lateral necks NS	Center neck NS	For tubing O.D. max. mm	Cat. No.:
4 x 18		1 x 29/32	4 x 10	<b>D 748-16</b>
2 x 18	2 x 29/32	1 x 29/32	2 x 14	<b>D 748-40</b>
	2 x 29/32 2 x 14/23	1 x 29/32		<b>D 748-60</b>

#### Applications:

Drawing or inserting aggressive or pure liquids. Inserting tubing, tubes and probes into vessels. Use of a stirrer bearing in center neck for central position of a stirrer shaft.



## BOLA Distributors for Reaction Vessels (R)

Material:	Temperature resistance:	Chemical resistance:	Vacuum:	autoclave:
PTFE, PP	from 0 °C to + 110°C	+++ universal	suitable	121°

### Product description:

Blue screw cap made of PP with GLS 80 thread, body made of PTFE. Center neck with GL 25 thread for connecting tubing or tube up to a max. O.D. of 15 mm, four lateral necks with GL 18 thread. Exchangeable shaft guide (PTFE page 41) with screw cap (PPS page 41) for inserting and fixing a stirrer shaft in the center neck included. Very good chemical resistance, for working temperatures up to max. +200°C (PP screw cap max. +110°C)

FDA conform

Lateral necks GL	Center neck GL	For tubing O.D. max. mm	Dia. of stirrer shaft mm	Cat. No.:
4 x 18	1 x 25	4 x 10	8	D 744-16
4 x 18	1 x 25	4 x 10	10	D 744-24

### Applications:

Drawing or inserting aggressive or pure liquids. Inserting tubing, tubes and probes into vessels. Use of a stirrer bearing in center neck for central position of a stirrer shaft.

« | »  
Special Request?  
+49 (0) 93 46-92 86-0



## BOLA INNOVATION

### Multiple Distributors for Bottles

The distributor body can be turned independently from the screw cap. This means that the completely assembled distributor can be removed and fixed on another vessel without the risk of disarranging the tubing.

## BOLA Distributors for Reaction Vessels (S)

Material:	Temperature resistance:	Chemical resistance:	Vacuum:	autoclave:
PP	from 0 °C to + 110°C	++ very good	suitable	121°

### Product description:


Blue screw cap made of PP with GLS 80 thread, body made of PP with center ground joint and lateral GL-threaded necks. Restricted chemical resistance, for working temperatures up to max. +110°C

FDA conform

Lateral necks GL	Center neck NS	For tubing O.D. max. mm	Cat. No.:
4 x 18	29/32	4 x 10	D 746-16

### Applications:

Drawing or inserting aggressive or pure liquids. Inserting tubing, tubes and probes into vessels. Use of a stirrer bearing (see page 38) in center neck for central position of a stirrer shaft.

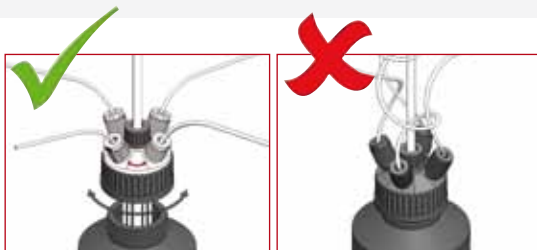

SUITABLE: page 149  
Tubing for all screw joints.

## BOLA Multiple Distributors for Bottles

Material:	Temperature resistance:	Chemical resistance:	Vacuum:	autoclave:
PTFE, PP	from 0 °C to +110 °C	+++ universal	suitable	121°

Product description:

Blue screw cap made of PP with GLS 80 thread, body made of PTFE.




FDA conform

	For tubing O. D. max. mm	Necks	Cat. No.:
<b>NEW A</b>	6 x 8,0	6 x GL 14	D 754-08
<b>B</b>	4 x 12,7	4 x GL 18	D 754-16
<b>C</b>	3 x 12,7 / 1 x 14	3 x GL 18 / 1 x GL 25	D 754-24
<b>NEW D</b>	2 x 12,7 / 1 x 21	2 x GL 18 / 1 x GL 32	D 754-36

Product description:

Blue screw cap made of PP with GLS 80 thread, body made of PP.

	For tubing O. D. max. mm	Necks	Cat. No.:
<b>E</b>	4 x 12,7	4 x GL 18	D 750-16
<b>F</b>	3 x 12,7 / 1 x 14	3 x GL 18 / 1 x GL 25	D 750-24

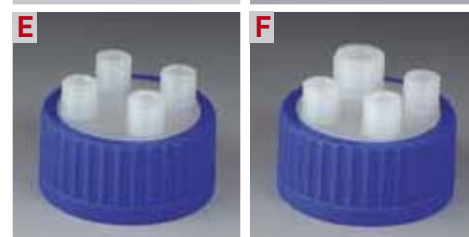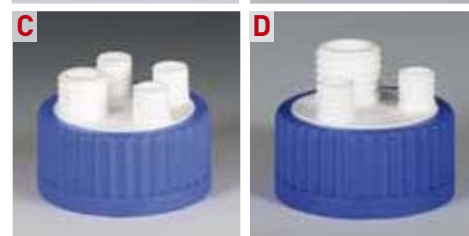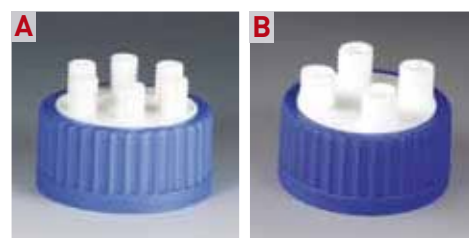

## BOLA Screw Caps High Chem

Material:	Temperature resistance:	Chemical resistance:	Vacuum:	autoclave:
PTFE, PP	from 0 °C to +110 °C	+++ universal	suitable	121°

Product description:

Knurled blue screw cap made of PP with GLS 80 thread. Sealing insert made of PTFE with elastic sealing lip and an o-ring for balancing unevenness on the bottle neck. Very good chemical resistance, the product is only exposed to PTFE.

FDA conform

Thread GLS	Cat. No.:
80	H 998-18

### Applications:

- » suitable for glass bottles with GLS 80 thread
- » for the storage of highly aggressive or pure chemicals
- » tight sealing even at high thermal fluctuations



## BOLA GLS Reductions

Material: **PP**      Temperature resistance: **from -20 °C to +110 °C**      Chemical resistance: **++ very good**

Product description:

Blue screw cap made of PP, movable reduction body made of PP with O-Ring made of FPM for transition to GL threads. The body can be moved independently from the screw cap so that the completely assembled reduction can be removed and fixed on another vessel without the risk of disarranging the tubing or cable.

**NEW**

FDA conform

From Cap GLS	Reducing thread GL	For tubing-Ø mm	Cat. No.:
80	14	0,8 - 8,0	D 787-08
80	18	1,6 - 10,0	D 787-16
80	25	1,6 - 14,0	D 787-24
80	45	3,2 - 32,0	D 787-40



Material: **PTFE, PSU**      Temperature resistance: **from -45 °C to +180 °C**      Chemical resistance: **+ good**

Product description:

White screw cap made of PSU, movable reduction body made of PTFE with O-Ring made of FPM for transition to GL threads. The body can be moved independently from the screw cap so that the completely assembled reduction can be removed and fixed on another vessel without the risk of disarranging the tubing or cable.

**NEW**

FDA conform

From Cap GLS	Reducing thread GL	For tubing-Ø mm	Cat. No.:
80	14	0,8 - 8,0	D 788-08
80	18	1,6 - 10,0	D 788-16
80	25	1,6 - 14,0	D 788-24
80	45	3,2 - 32,0	D 788-40



## BOLA GLS-Reduction

Material: **PTFE, PP**      Temperature resistance: **from -20 °C to +110 °C**      Chemical resistance: **+++ universal**      Vacuum: **suitable**      autoclave: **121°**

Product description:

Blue screw cap made of PP with GLS 80 thread, movable insert with GL 45 thread made of PTFE. Transition from GLS 80 bottles to a GL 45 thread. The body can be moved independently from the screw cap so that the completely assembled reduction can be removed and fixed on another vessel without the risk of disarranging the tubing or cable. The product is only exposed to PTFE.

FDA conform

For thread GLS	Reducing thread GL	Cat. No.:
80	45	D 785-24





## BOLA Distributors for Canisters

These distributors are ideal for drawing liquids from canisters and for distributing these liquids to several vessels.

They consist of a screw cap for canister threads (see page 295) and a movable body with three GL-threaded necks. The threaded necks allow the connection of tubing or tubes made of glass, metal, or plastic by means of BOLA Laboratory Screw Joints (see page 71). The distributor can also be integrated into a pressure or vacuum system.

A possible unevenness of the canister thread is adjusted by an o-ring behind an elastic sealing lip, and the canister is closed tightly. The product is only exposed to the body of the distributor.

The special clou: the body of the distributor can be turned independently from the screw cap. This means, that the completely assembled distributor can be removed and fixed on another canister without the risk of disarranging the tubing.

Material:	Temperature resistance:	Chemical resistance:	autoclave:
PTFE	from -20°C to +200°C	+++ universal	121°

Product description:  
Distributors for canisters with movable body and GL-threaded necks.

» Type with screw cap made of glass-fibre reinforced PTFE and body made of PTFE.

FDA conform

	Canister thread S	Necks GL	Cat. No.:
<b>A</b>	55	2 x 14 / 1 x 18	D 760-16
	60	3 x 18	D 760-24





## BOLA Distributors for Canisters

Material: <b>PE, PTFE</b>	Temperature resistance: <b>from -50°C to +80°C</b>	Chemical resistance: <b>++ very good</b>	autoclave: <b>121°</b>
------------------------------	---	---	---------------------------

» Type with screw cap made of PE and body made of PTFE.

	Canister thread S	Necks GL	Cat. No.:
<b>B</b>	55	2 x 14 / 1 x 18	D 762-08
<b>C</b>	60	2 x 18	D 762-14
<b>D</b>	60	3 x 18	D 762-20
<b>E</b>	65	2 x 18	D 762-26
<b>F</b>	65	3 x 18	D 762-32
<b>G</b>	71	2 x 18 / 1 x 25	D 762-38
<b>H</b>	90	3 x 18 / 1 x 25	D 762-44
<b>I</b>	Nalge B53	2 x 14	D 766-16
<b>J</b>	Nalge B83	3 x 18 / 1 x 25	D 766-22


Material: <b>PP</b>	Temperature resistance: <b>from -0°C to +110°C</b>	Chemical resistance: <b>++ very good</b>	autoclave: <b>121°</b>
------------------------	---	---	---------------------------

» Type with screw cap made of PE and body made of PP.

	Canister thread S	Necks GL	Cat. No.:
<b>K</b>	55	2 x 14 / 1 x 18	D 764-16
	60	3 x 18	D 764-24

### Applications:

Drawing or inserting aggressive or pure liquids. Inserting tubing, tubes and probes into canisters.

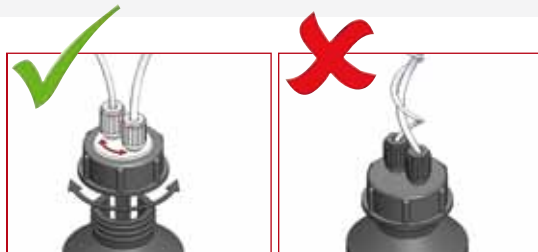

« Special Request? »  
+49 (0) 93 46-92 86-0





## BOLA Multiple Distributors for Barrels

These distributors are ideal for drawing liquids from barrels and for distributing these liquids to several vessels. They consist of a screw cap for barrels with female thread and a movable body with GL-threaded necks. The threaded necks allow the connection of tubing or tubes made of glass, metal, or plastic by means of BOLA Laboratory Screw Joints (see page 71). Liquids can be drawn from the barrel without contamination of the ambient air by leaking vapours. In addition, the distributor can be integrated in a pressure or vacuum system.

The special clou: the body of the distributor can be turned independently from the screw cap. This means, that the completely assembled distributor can be removed and fixed on another barrel without the risk of disarranging the tubing.

For easy determination of the suitable distributor, you can find the dimensions of the barrel threads on page 296.

### BOLA Multiple Distributors for Barrels

Material:	Temperature resistance:	Chemical resistance:	Pressure:	Vacuum:	autoclave:
PTFE	from -20°C to +200°C	+++ universal	1 bar	suitable	121°

#### Product description:

Screw cap made of glass-fibre reinforced PTFE for barrels with female thread, body with GL-threaded necks made of PTFE. Very good chemical resistance, for working temperatures up to max. + 200°C. The product is only exposed to PTFE.


FDA conform

**NEW**

For female barrel thread	Necks GL	For tubing O.D. max. mm	Cat. No.:
R2"/ G2"/ BSP 2"	3 x 14	8	D 696-06
R2"/ G2"/ BSP 2"	4 x 18	10	D 696-08
R2"/ G2"/ BSP 2"	2 x 18 / 1 x 25	2 x 10 / 1 x 14	D 696-14
Mauser 2"	4 x 18	10	D 697-08
Mauser 2"	2 x 18 / 1 x 25	2 x 10 / 1 x 14	D 697-14
<b>NEW</b> Tri-Sure 2"	3 x 14	8	D 698-06
Tri-Sure 2"	4 x 18	10	D 698-08
Tri-Sure 2"	2 x 18 / 1 x 25	2 x 10 / 1 x 14	D 698-14

#### Applications:

Drawing or inserting aggressive or pure liquids. Inserting tubing, tubes and probes into barrels.

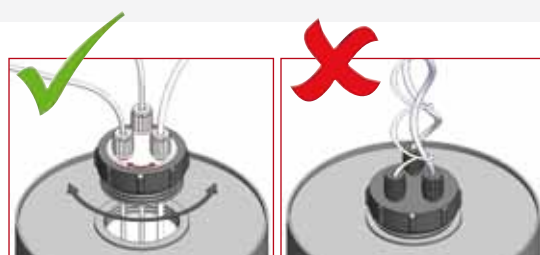

## BOLA Ring Wrench

Material: **PP**      Temperature resistance: **from -20°C to +110°C**      Chemical resistance: **++ very good**

Product description:  
Ring wrench made of PP.

	I.D. mm	Total length mm		Cat. No.:
	78	200		<b>D 701-24</b>

### Applications:

For opening and closing BOLA Multiple Distributors for Barrels.



## BOLA Barrel Aeration

Material: **PTFE**      Temperature resistance: **from -20°C to +230°C**      Chemical resistance: **+++ universal**      Vacuum: **suitable**      autoclave: **121°**

Product description:  
Consisting of a body made of PTFE for female thread R 3/4" with a GL 32 thread, a PTFE/silicone gasket, an exchangeable filtering membrane (2,5µm) made of PTFE and a screw cap made of PPS. Very good chemical resistance, the product is only exposed to PTFE.

Pressure compensation at 0,1 bar differential pressure.

Max. flow rate:

- » at 0,5 bar differential pressure: 80 l/h
- » at 1,0 bar differential pressure: 320 l/h

FDA conform

For female barrel thread	O.D. of membrane mm	Thickness of membrane mm	Thread of screw cap GL	Cat. No.:
R3/4"	29	0,2	32	<b>N 1696-32</b>

### Applications:

For pressure compensation during filling or drawing of liquids. Integrated membrane prevents contamination of the product. Membranes are available separately (see Cat. No. N 1699-32 on page 93).



### BOLA Practical-Tip

Benjamin Schmitt  
» engineering



#### Protecting your pump

To avoid a damage of your pump due to loose particles or dirt, simply include a dirt filter in your system.

see page 105

## BOLA Barrel-GL-Adaptors

Material: <b>PTFE</b>	Temperature resistance: <b>from -200°C to +250°C</b>	Chemical resistance: <b>+++ universal</b>	Vacuum: <b>suitable</b>	autoclave: <b>121°</b>
--------------------------	---	--	----------------------------	---------------------------

Product description:

Adaptors made of PTFE/PP, for transition from female barrel thread R2" or Tri-Sure 2" to a GL 45 thread. See page 296 for dimensions of the barrel threads.

FDA conform

» Made of PTFE, very good chemical resistance, working temperatures up to max. +250°C

	Material	For barrel thread	Thread of head GL	Bore dia. max. mm	Dia. of grip ca. mm	Cat. No.:
<b>A</b>	PTFE	R2" / G2" / BSP2"	45	32	78	<b>D 736-12</b>
	PTFE	Tri-Sure 2"	45	32	67	<b>D 736-24</b>

Material: <b>PP</b>	Temperature resistance: <b>from -0°C to +110°C</b>	Chemical resistance: <b>++ very good</b>	Vacuum: <b>suitable</b>	autoclave: <b>121°</b>
------------------------	---	---	----------------------------	---------------------------

» Made of PP, restricted chemical resistance, working temperatures up to max. +110°C

FDA conform

	Material	For barrel thread	Thread of head GL	Bore dia. max. mm	Dia. of grip ca. mm	Cat. No.:
<b>B</b>	PP	R2" / G2" / BSP2"	45	32	78	<b>D 737-12</b>
	PP	Tri-Sure 2"	45	32	67	<b>D 737-24</b>

### Applications:

For the connection of e. g. BOLA Multiple Distributors for Bottles with a GL 45 thread for inserting tubing, tubes or probes.



## BOLA GL-Aeration

Material: <b>PTFE, PPS</b>	Temperature resistance: <b>from -20°C to +70°C</b>	Chemical resistance: <b>++ very good</b>	autoclave: <b>121°</b>
-------------------------------	---	---	---------------------------

Product description:

Filter with PTFE membrane and flexible tubing, screw cap made of PPS for GL threads.

For thread GL	Filter material	Pore size µm	Filter O.D. mm	Cat. No.:
14	PTFE	0,20	33	<b>N 1697-14</b>
18	PTFE	0,20	33	<b>N 1697-18</b>

### Applications:

For sterile pressure compensation on multiple distributors for bottles. Overpressure or vacuum in the vessel are prevented. A contamination of the product with dust or any other particles is avoided. It is recommended to exchange the filter every 6 months.



## BOLA Sets for Pressure Compensation

Material: <b>PTFE</b>	Temperature resistance: <b>from -20°C to +230°C</b>	Chemical resistance: <b>+++ universal</b>	Vacuum: <b>suitable</b>	autoclave: <b>121°</b>
--------------------------	--	--	----------------------------	---------------------------

Product description:



Consisting of screw cap made of PPS for GL thread, PTFE/silicone gasket and exchangeable filtering membrane made of PTFE (pore size 2,5 µm). High chemical resistance, the product is only exposed to PTFE. Pressure compensation already at 0,1 bar differential pressure.

FDA conform

For thread GL	Dia. of membra- ne mm	Flow rate at 0,5 bar /l/h	Flow rate at 1 bar /l/h	Cat. No.:
14	12	16	25	<b>N 1698-14</b>
18	16	25	85	<b>N 1698-18</b>
25	23	50	180	<b>N 1698-25</b>
32	29	80	320	<b>N 1698-32</b>
45	42	210	800	<b>N 1698-45</b>

### Applications:

For pressure compensation during filling or drawing of liquids. Prevention of unintentional overpressure or vacuum in the vessel. Integrated membrane prevents contamination of the product. Membranes are available separately (see Cat. No. N 1699-32 on page 93).

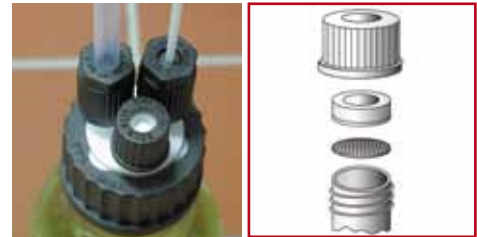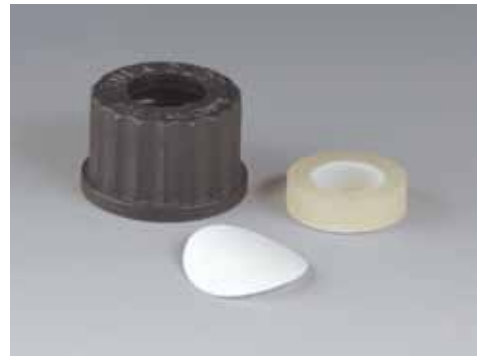

## BOLA Membranes for Pressure Compensation

Material: <b>PTFE</b>	Temperature resistance: <b>from -200°C to +250°C</b>	Chemical resistance: <b>+++ universal</b>	Vacuum: <b>suitable</b>	autoclave: <b>121°</b>
--------------------------	---	--	----------------------------	---------------------------

Product description:

Filtering membrane made of PTFE, thickness 0,2, pore size 2,5 µm.

FDA conform

For thread GL	Dia. of membra- ne mm	Flow rate at 0,5 bar /l/h	Flow rate at 1 bar /l/h	Cat. No.:
14	12	16	25	<b>N 1699-14</b>
18	16	25	85	<b>N 1699-18</b>
25	23	50	180	<b>N 1699-25</b>
32	29	80	320	<b>N 1699-32</b>
45	42	210	800	<b>N 1699-45</b>

### Applications:

Replacement membrane for BOLA Set for Pressure Compensation (see Cat. No. N 1698-.. on page 93).



Also made by Bohlender.

**TIP**

## Desiccators and Drying Cabinets

Stable, functional, custom-made - for dust-free storage in dry or inert atmosphere.



Ask for your catalogue or get more information:

**[www.sicco.de](http://www.sicco.de)**

s from

**sicco**



# BOLA Screw Caps

BOLA Screw Caps are available as closed caps for closing bottles and vessels with GL thread or as caps with aperture which can for example hold tubes or – in connection with a gasket - be used as septum for sampling. All caps have a handy knurl for easy opening and closing.

They are available for bottle threads GL 14 to GL 45 and are either made of glass-fibre reinforced PTFE, PPS or PBTP. The closed caps are either supplied with an integrated PTFE/silicone gasket or with an integrated PTFE membrane.

The caps which are made of glass-fibre reinforced **PTFE** have a high chemical resistance and can be used with aggressive products.

**PPS** offers a high mechanical strength; even caps with small diameters can be closed safely. At the same time, these caps can be used at high temperatures due to a good chemical and thermal resistance.

**PBTP** caps are an ideal and cheap choice for all applications which do not need high chemical and thermal resistance.

## BOLA Screw Caps with Aperture

Product description:

Screw cap with handy knurl, suitable for GL threads, with aperture, made of glass-fibre reinforced PTFE, PPS or PBTP

Material:	Temperature resistance:	Chemical resistance:
<b>PTFE-GF</b>	<b>from -200°C to +250°C</b>	<b>+++ universal</b>

FDA conform	For thread	Dia. of aperture	Cat. No.:
	GL	mm	
	14	9,2	<b>H 983-01</b>
	18	11,0	<b>H 983-02</b>
	25	15,0	<b>H 983-03</b>
	32	20,0	<b>H 983-04</b>
	45	34,0	<b>H 983-05</b>

Material:	Temperature resistance:	Chemical resistance:
<b>PPS</b>	<b>from -20°C to +250°C</b>	<b>+++ universal</b>

	For thread	Dia. of aperture	Cat. No.:
	GL	mm	
	14	9,2	<b>H 995-14</b>
	18	11,0	<b>H 995-18</b>
	25	15,0	<b>H 995-25</b>
	32	20,0	<b>H 995-32</b>
	45	34,0	<b>H 995-45</b>

Material:	Temperature resistance:	Chemical resistance:
<b>PBTP</b>	<b>from -50°C to +140°C</b>	<b>+ good</b>

	For thread	Dia. of aperture	Cat. No.:
	GL	mm	
	14	9,2	<b>H 984-01</b>
	18	11,0	<b>H 984-02</b>
	25	15,0	<b>H 984-03</b>
	32	20,0	<b>H 984-04</b>
	45	34,0	<b>H 984-05</b>

### Applications:

As joining piece between tubes with flange and tubes with GL thread, suitable gasket rings are available separately (Cat. No. H 975 / H 977 / on page 99, 100). As septum by inserting a separately available gasket (Cat. No. H 973 on page 100).





## BOLA Screw Caps with Aperture

Material: **PPS** Temperature resistance: **from -20°C to +250°C** Chemical resistance: **+++ universal**

Product description:

Screw cap made of PPS with handy knurl, with aperture. The cap provides a high mechanical and thermal resistance (up to max. +250°C).

For thread	Bore dia.	Cat. No.:
S	mm	
40	28	H 989-40

### Applications:

As joining piece between tubes with flange and tubes with GL thread, suitable gasket rings are available separately. As septum by inserting a separately available gasket (see Cat. No. H 973-.. on page 100) - e. g. bottles of Merck KGaA.



## BOLA Screw Caps

Product description:

Screw cap with handy knurl, with integrated PTFE/silicone gasket, suitable for GL threads, made of glass-fibre reinforced PTFE without gasket, PPS or PBTP. After assembly, the product is only exposed to PTFE.

Material: **PTFE** Temperature resistance: **from -200°C to +250°C** Chemical resistance: **+++ universal**

FDA conform	For thread	Cat. No.:
	GL	
	14	H 986-01
	18	H 986-02
	25	H 986-03
	32	H 986-04
	45	H 986-05

Material: **PPS** Temperature resistance: **from -20°C to +230°C** Chemical resistance: **+++ universal**

**BESTSELLER**

FDA conform	For thread	Cat. No.:
	GL	
	14	H 993-14
	18	H 993-18
	25	H 993-25
	32	H 993-32
	45	H 993-45

Material: **PBTP** Temperature resistance: **from -50°C to +140°C** Chemical resistance: **+ good**

FDA conform	For thread	Cat. No.:
	GL	
	14	H 987-01
	18	H 987-02
	25	H 987-03
	32	H 987-04
	45	H 987-05

### Applications:

For closing bottles and vessels with GL threads.



## BOLA Screw Caps

Material: <b>PPS</b>	Temperature resistance: <b>from -20°C to +230°C</b>	Chemical resistance: <b>+++ universal</b>
-------------------------	--	--

Product description:  
Screw cap made of PPS with handy knurl, with integrated PTFE/silicone gasket for compensation of unevenness on the sealing surface. After assembly, the product is only exposed to PTFE. The cap provides a high mechanical and thermal resistance.

FDA conform

For thread S	Cat. No.:
40	H 988-40

**Applications:**  
For closing bottles and vessels with S40 threads - e.g. bottles of Merck KGaA



## BOLA Screw Caps with Aperture

Material: <b>PP</b>	Temperature resistance: <b>from -20°C to +110°C</b>	Chemical resistance: <b>+ good</b>
------------------------	--	---------------------------------------

Product description:  
Screw cap made of PP with handy knurl. The cap provides a good chemical and thermal resistance (up to max +110°C).

FDA conform

For thread GL	Bore dia. mm	Cat. No.:
45	34	H 999-45



## BOLA Screw Caps HT (High Temp)

Material: <b>PPS</b>	Temperature resistance: <b>from -20°C to +250°C</b>	Chemical resistance: <b>+++ universal</b>	Vacuum: <b>suitable</b>
-------------------------	--	--	----------------------------

Product description:  
Screw cap with handy knurl made of PPS with elastic and highly chemical resistant integrated PTFE-membrane gasket. After assembly, the product is only exposed to PTFE. The cap provides a high mechanical and thermal resistance (up to max. +250°C).

FDA conform

For thread GL	Cat. No.:
14	H 994-14
18	H 994-18
25	H 994-25
32	H 994-32
45	H 994-45

**Applications:**  
For all applications which need high chemical resistance and sealing. Usable under vacuum, e.g. cold traps. The gasket is physiologically safe according to VDI/VDE guideline 2480 and fulfils FDA 21 CFR 177-1550 requirements.



**BOLA One-Sided Gaskets**

Material: PTFE      Temperature resistance: from -60°C to +230°C      Chemical resistance: +++ universal

Product description:


Silicone ring with PTFE washer. After assembly, the product is only exposed to PTFE. Packing unit: 10 pieces, differing ordering quantities are rounded up to factor 10.



For thread GL	O.D. x I.D. x Height mm	For tube dia. mm	Cat. No.:
14	12 x 6,0 x 3,5	5,5 - 6,5	H 975-02
18	16 x 6,0 x 4,5	5,5 - 6,5	H 975-04
18	16 x 8,0 x 4,5	7,5 - 9,0	H 975-06
18	16 x 10,0 x 4,5	9,0 - 11,0	H 975-10
25	22 x 8,0 x 6,5	7,5 - 9,0	H 975-12
25	22 x 10,0 x 6,5	9,0 - 11,0	H 975-14
25	22 x 12,0 x 6,5	11,0 - 13,0	H 975-18
32	29 x 10,0 x 9,0	9,0 - 11,0	H 975-20
32	29 x 12,0 x 9,0	11,0 - 13,0	H 975-22
32	29 x 14,0 x 9,0	13,0 - 15,0	H 975-26
32	29 x 16,0 x 9,0	15,0 - 17,0	H 975-28
32	29 x 18,0 x 9,0	17,0 - 19,0	H 975-30
45	42 x 26,0 x 9,0	25,0 - 27,0	H 975-34
45	42 x 32,0 x 9,0	31,0 - 33,0	H 975-36

Applications:

As gasket for BOLA Screw Caps with Aperture (Cat. No. H 983/ H 984/ H 995 on page 96). Also suitable for GL caps of Duran Group (formerly Schott AG).

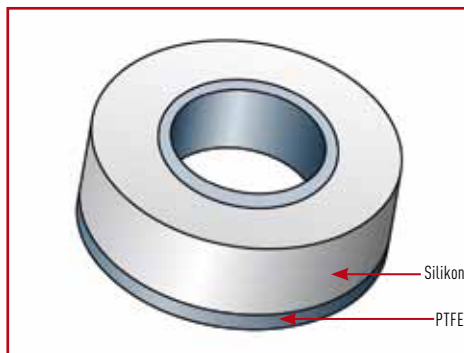

**One-Sided Gaskets**

» The soft silicone core provides flexibility and perfect sealing. The detachable PTFE sleeve makes this gasket versatile. Very convenient! «

Dieter Verhees » Glastechnische Werkstatt Dieter Verhees

**BOLA SVL Gaskets**

Material: PTFE      Temperature resistance: from -60°C to +230°C      Chemical resistance: +++ universal

Product description:


Silicone ring with double-sided washer made of PTFE. Suitable for Torion-/SVL threads. Universal chemical resistance, the product is only exposed to PTFE.



For SVL thread I.D. mm	O.D. of gasket mm	For tube dia. mm	Height mm	Cat. No.:
15	15	5,6 - 6,4	5	H 979-12
15	15	7,6 - 8,4	5	H 979-24
22	22	13,6 - 14,4	5	H 979-32

Applications:

As gasket for tubing, tubes or probes inserted through Torion threads.

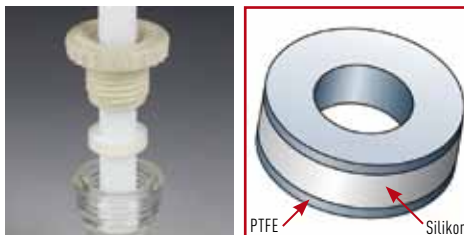

## BOLA Gaskets for Screw Caps

Material: PTFE      Temperature resistance: from -60°C to +230°C      Chemical resistance: +++ universal

### Product description:

Upper side made of PTFE, lower side made of silicone-elastomer for balancing unevennesses on sealing surfaces. After assembly, the product is only exposed to PTFE.




For thread	Dia. of gasket mm	Thickness of gasket mm	Cat. No.:
GL 14	13,0	3,3	H 973-14
GL 18	16,8	3,3	H 973-18
GL 25	23,5	3,3	H 973-25
GL 32	30,2	3,3	H 973-32
S 40	38,0	3,3	H 973-41
GL 45	43,2	3,3	H 973-45

**NEW**

### Applications:

As gasket for BOLA Screw Caps with Aperture (Cat. No. H 986/ H 987/ H 988/ H 993 on page 97, 98). As septum in combination with BOLA-Screw-Caps with Aperture (Cat. No. H 983/ H 984/ H 995/ H 989/ H 999 on page 96, 97, 98).

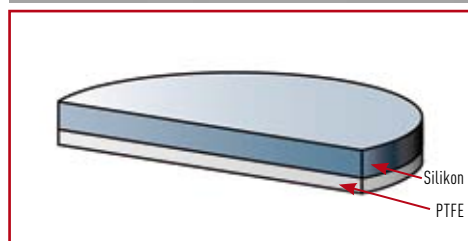

## BOLA Double-Sided Gaskets

Material: PTFE      Temperature resistance: from -60°C to +230°C      Chemical resistance: +++ universal

### Product description:


Silicone ring with double-sided PTFE washer. After assembly, the product is only exposed to PTFE.



For thread GL	O.D. x I.D. x Height mm	For tube dia. mm	Cat. No.:
14	12 x 6,0 x 3,6	5,5 - 6,5	H 977-08
18	16 x 6,0 x 4,6	5,5 - 6,5	H 977-16
18	16 x 8,0 x 4,6	7,5 - 9,0	H 977-18
18	16 x 10,0 x 4,6	9,0 - 11,0	H 977-20
25	22 x 8,0 x 6,6	7,5 - 9,0	H 977-28
25	22 x 10,0 x 6,6	9,0 - 11,0	H 977-32
25	22 x 12,0 x 6,6	11,0 - 13,0	H 977-36

### Applications:

As gasket for BOLA Screw Caps with Aperture (Cat. No. H 983/ H 984/ H 995 on page 96). Also suitable for GL caps of Duran Group (formerly Schott AG).

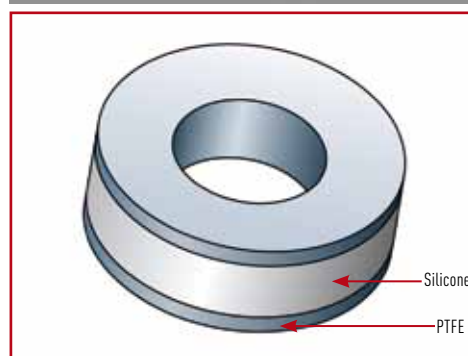

## BOLA BENEFITS

- » suitable for all kinds of probes, tubes or hard-walled tubing
- » can be used with GL threads or ground joints
- » angle and height can be fixed tightly
- » a damage of tube or probe due to collision with the stirrer shaft can be avoided

101

### BOLA Swivelling Screw Fittings with Ground Joint

**BESTSELLER**

Material: PTFE, PPS    Temperature resistance: from -20°C to +200°C    Chemical resistance: +++ universal    Vacuum: suitable

#### Product description:


Ground joint body made of PTFE, screw cap made of PPS. Probes, tubes or tubing are firstly inserted through the fitting, then the fitting is put into the ground joint and the inserted element can be fixed in the requested position.

FDA conform

Ground joint size NS	For probe/tube O.D. mm	Max. angle A mm	Thread of screw cap GL	Cat. No.:
19/26	6	4°	18	D 692-24
29/32	6	8°	25	D 692-34
29/32	8	7°	25	D 692-44
29/32	10	6°	25	D 692-54
29/32	12	5°	25	D 692-64

#### Applications:

Insertion of probes, tubes or tubing into vessels with ground joints for avoiding collision with the stirrer shaft.



SCREW JOINTS / COMPONENTS WITH GL THREAD

## BOLA Swivelling Screw Fittings

Material: <b>PTFE, PPS</b>	Temperature resistance: <b>from -20°C to +200°C</b>	Chemical resistance: <b>+++ universal</b>	Pressure: <b>5 bar</b>	Vacuum: <b>suitable</b>
-------------------------------	--	--	---------------------------	----------------------------

Product description:

Screw cap made of PPS with inner parts made of PTFE. Probes, tubes or tubing are firstly inserted through the fitting, then the fitting is screwed on the GL neck and the inserted element can be fixed in the requested position.

FDA conform

For probe/tube O.D. mm	For thread GL	Max. angle A mm	Cat. No.:
2,0	18	10°	D 690-14
(1/8") 3,2	18	9°	D 690-18
6,0	18	5°	D 690-24
6,0	25	12°	D 690-34
8,0	25	10°	D 690-38
(3/8") 9,52	25	9°	D 690-42
10,0	25	8°	D 690-46
12,0	25	6°	D 690-50
19,0	32	3°	D 690-68

### Applications:

Insertion of probes, tubes or tubing into vessels with GL necks for avoiding collision with the stirrer shaft.



## BOLA INNOVATION

### Swivelling Screw Fittings

Many products only allow to fix for example a thermometer in straight direction. BOLA Swivelling Screw Fittings with spherical inner parts allow a deflection of up to 12°.

## BOLA Threaded Couplings


Material: <b>PTFE</b>	Temperature resistance: <b>from -20°C to +200°C</b>	Chemical resistance: <b>+++ universal</b>
--------------------------	--	--

Product description:

Two screw caps made of PPS (up to +200°C) or PBTP (up to +180°C) with GL thread and a PTFE/FPM gasket. Connection piece made of PTFE. The product is only exposed to PTFE. For connecting two GL threads of the same size.

FDA conform

For thread GL	Length from sealing lip to sealing lip mm	A	Cat. No.: PPS cap	B	Cat. No.: PBTP cap
14	15		H 900-01		H 901-01
18	17		H 900-02		H 901-02
25	22		H 900-03		H 901-03
32	22		H 900-04		H 901-04
45	23		H 900-05		H 901-05

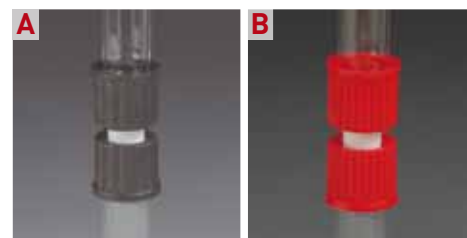

## BOLA Reducing Screw Thread Adaptor Couplings

Material: PTFE  
 Temperature resistance: from -20°C to +200°C  
 Chemical resistance: +++ universal

Product description:

Two screw caps made of PPS with GL thread and a PTFE/FPM gasket.  
 Connection piece made of PTFE. The product is only exposed to PTFE. For connecting two GL threads of different sizes.

FDA conform

From thread GL	To thread GL	Length from seating lip to seating lip mm	Cat. No.:
18	14	20,0	H 904-02
25	14	27,5	H 904-03
25	18	28,3	H 904-04
32	18	32,5	H 904-05
32	25	28,0	H 904-06
45	25	38,0	H 904-07
45	32	33,0	H 904-08



103

## BOLA GL Bellows

Material: PTFE  
 Temperature resistance: from -20°C to +200°C  
 Chemical resistance: +++ universal  
 Vacuum: suitable

Product description:

Two screw caps made of PPS with GL thread and a PTFE/FPM gasket.  
 Bellow with sharp folds made of PTFE. Bellow can be bent up to an angle of 120°, flexible and strainless connection.

FDA conform

**NEW**  
**NEW**

For thread GL	Min. length of bellow mm	Max. length of bellow mm	Cat. No.:
14	28	40	H 902-03
18	42	90	H 902-04
25	58	104	H 902-05
32	58	90	H 902-10
45	67	115	H 902-15



SCREW JOINTS / COMPONENTS WITH GL THREAD

## BOLA GL Dispenser

Material: PTFE  
 Temperature resistance: from -20°C to +110°C  
 Chemical resistance: +++ universal

Product description:

Black screw cap made of PPS with GL 45 thread, movable dispenser with stopcock made of PTFE, integrated ventilation. With PTFE cap for sealing the discharge tube.

FDA conform

Thread GL	Stopcock bore dia. mm	Dia. of discharge tube mm	Cat. No.:
45	4	4	H 918-10

**Applications:**

For controlled and safe pouring of liquids. A bottle with mounted dispenser can be headfirst fixed in a holder.



## BOLA GL Funnels

Funnels with a capacity of approx. 100 ml made of borosilicate glass. Inlet tube made of PTFE, connection with GL screw caps made of PPS or with ground joint. The outlet tube has a length of approx. 64 mm on the lower side. The glass funnel can be fixed in each position.

Material: PTFE, PPS  
 Temperature resistance: from -20°C to +200°C  
 Chemical resistance: +++ universal  
 Vacuum: suitable

Product description:

Insertion for reaction vessels with GL-threaded necks.

FDA conform

	Thread of funnel GL	Connecting thread on lower side GL	Inlet tube (O.D. x I.D.) mm	Cat. No.:
<b>A</b>	25	25	15 x 12	D 738-12
	32	32	20 x 17	D 738-22
	25	32	20 x 17	D 738-42
	32	25	15 x 12	D 738-52

Product description:

Insertion for reaction vessels with ground joint sockets.

FDA conform

	Thread of funnel GL	Ground joint NS	Inlet tube (I.D. x O.D.) mm	Cat. No.:
<b>B</b>	32	29/32	20 x 17	D 739-22

**Applications:**

Positionable insertion for reaction vessels. Adhering or agglutinating of powders is prevented. Liquids can be inserted directly without cooling or adhering at the wall of the vessel. Instead of the glass funnel, a condenser can be mounted at the upper screw cap and provide a direct return into the vessel.



## BOLA INNOVATION

### GL-Funnel

Helps to insert products into reaction vessels. Available in two versions:

- a) for GL threads
- b) for ground joints

Liquids are inserted directly into the reactor and do not adhere and cool down at the wall.



## BOLA Dirt Traps

Material:	Temperature resistance:	Chemical resistance:	Pressure:	Vacuum:
PTFE	from -200°C to +250°C	+++ universal	10 bar	suitable

Product description:

With two GL 18 threads for connecting hard-walled tubing (PTFE, PFA, FEP) or tubes with BOLA Laboratory Screw Joints. Lateral connection with plug for easy exchange of filtering membrane (thickness 0,2-3,0 mm) and for cleaning. The flow direction is marked with an arrow. Completely made of PTFE, the flowing product is only exposed to PTFE.

FDA conform

Connecting thread GL	Dia. of filtering membrane mm	Bore dia. mm	Total height mm	Cat. No.:
18	25	8	88	N 1674-18

### Applications:

Protection of aggregates (pumps, valves, stopcocks, nozzles etc.) against particle contamination and damage. Metal-free, can be used under clean-room conditions. BOLA Filtering Membranes separately available (Cat. No. N 1690-28, page 267).



## BOLA Adaptors for Prominent® Pumps

Material:	Temperature resistance:	Chemical resistance:	Pressure:
PTFE	from -200°C to +250°C	+++ universal	10 bar

Product description:

Adaptor made of glass-fibre reinforced PTFE, transition from pump thread M20x1,5 to GL thread. Pressure resistant connection (max. 10 bar) of hard-walled tubing with Prominent® pumps by using BOLA Laboratory Screw Joints. Universal chemical resistance, the product is only exposed to PTFE.

FDA conform

Connecting thread GL	Bore dia. mm	Cat. No.:
14	3,0	D 730-12
18	10,5	D 730-24



# BOLA GL Tube Fittings

A distribution system consists of tubes or tubing and connection pieces, so-called tube fittings. The BOLA GL-Fitting-System is a modular system which consists of tube fittings, screw-in fittings, different stopcocks and valves.

All fittings have GL threads so that they can be connected to hard-walled tubing (PTFE, PFA, FEP) or tubes (e.g. glass, metal, plastic) by means of BOLA Laboratory Screw Joints (see page 71).

Together with these BOLA Laboratory Screw Joints (see page 71), the connection is absolutely tight and even suitable for vacuum; the screw joints for GL 14, GL 18 and GL 25 even resist pressures up to max. 10 bar at room temperature.

The system is completed by accessories like quick connectors, dirt traps and GL hose connectors.

## BOLA GL Tube Fittings

Material: PTFE	Temperature resistance: from -200°C to +250°C	Chemical resistance: +++ universal	Pressure: 10 bar	Vacuum: suitable
-------------------	--	---------------------------------------	---------------------	---------------------

Product description:

Straight tube fitting made of PTFE, two connections with GL thread. Universal chemical resistance, the product is only exposed to PTFE.

FDA conform

Thread GL	Bore dia. mm	Length without screw joint mm	Wrench size hexagon mm	Cat. No.:
14	6,5	50	15	D 538-14
18	10,5	50	19	D 538-18
25	14,5	56	27	D 538-25
32	21,0	75	32	D 538-32
45	32,5	75	46	D 538-45

**Application:**

For distributing liquids or gases. As reduction for connecting different diameters of tubes or tubing.



**BOLA Practical Tip**

Marion Stoppel » construction

**Don't fear blocked passage bores:**

The special construction of our fittings does not allow tubing to be pushed in too far.



**SUITABLE: page 117**  
Fittings and laboratory screw joints made of static dissipative PTFE-EX.

## BOLA GL Tube Fittings T

Material: PTFE	Temperature resistance: from -200°C to +250°C	Chemical resistance: +++ universal	Pressure: 10 bar	Vacuum: suitable
-------------------	--	---------------------------------------	---------------------	---------------------

Product description:

Tube fitting T-shaped made of PTFE, three connections with GL thread. Universal chemical resistance, the product is only exposed to PTFE.

FDA conform

Thread GL	Bore dia. mm	Length without screw joint mm	Height mm	Wrench size square mm	Cat. No.:
14	6,5	54	37	20	D 540-14
18	10,5	56	39	20	D 540-18
25	14,5	70	51	27	D 540-25
32	21,0	83	58	33	D 540-32
45	32,5	98	73	48	D 540-45

**Application:**

For distributing liquids or gases. As reduction for connecting different diameters of tubes or tubing.



## BOLA GL Tube Fittings Elbow

Material: <b>PTFE</b>	Temperature resistance: <b>from -200°C to +250°C</b>	Chemical resistance: <b>+++ universal</b>	Pressure: <b>10 bar</b>	Vacuum: <b>suitable</b>
--------------------------	---	--	----------------------------	----------------------------

Product description:

Tube fitting elbow-shaped made of PTFE, two connections with GL thread. Universal chemical resistance, the product is only exposed to PTFE.

FDA conform


Thread GL	Bore dia. mm	Length without screw joint mm	Wrench size square mm	Cat. No.:
14	6,5	37	20	D 539-14
18	10,5	39	20	D 539-18
25	14,5	51	27	D 539-25
32	21,0	58	33	D 539-32
45	32,5	73	48	D 539-45

**Application:**

For distributing liquids or gases. As reduction for connecting different diameters of tubes or tubing.



**SUITABLE:** page 71  
Laboratory screw joints



**BOLA  
Practical Tip**

Uwe Hossfeld » application engineering

**Protection from buckling**

If you want to avoid buckling of your tubing, simply cut it and add an elbow fitting for connection.

## BOLA GL Tube Fittings Cross

Material: <b>PTFE</b>	Temperature resistance: <b>from -200°C to +250°C</b>	Chemical resistance: <b>+++ universal</b>	Pressure: <b>10 bar</b>	Vacuum: <b>suitable</b>
--------------------------	---	--	----------------------------	----------------------------

Product description:

Tube fitting cross-shaped made of PTFE, four connections with GL thread. Universal chemical resistance, the product is only exposed to PTFE.

FDA conform

Thread GL	Bore dia. mm	Length without screw joint mm	Wrench size square mm	Cat. No.:
14	6,5	54	20	D 541-14
18	10,5	56	20	D 541-18
25	14,5	70	27	D 541-25
32	21,0	83	33	D 541-32

**Application:**

For distributing liquids or gases. As reduction for connecting different diameters of tubes or tubing.



## BOLA GL Quick Connectors

**BESTSELLER**

Material:	Temperature resistance:	Chemical resistance:	Pressure:	Vacuum:
PFA	from -50°C to +200°C	+++ universal	6 bar	suitable

**Product description:**

Two-part quick connector completely made of PFA, with two GL threads for connecting tubing or tubes with BOLA Laboratory Screw Joints. Quick and easy disconnection of flow. When disconnected, the flow is interrupted by means of built-in non-return valves and only continues after a safe locking. Suitable for pressure up to max. 6 bar, for vacuum of 700 mm Hg and working temperatures up to max. +200°C. Universal chemical resistance, the product is only exposed to PFA.

FDA conform

Connecting thread GL	Length without screw joint	Flow at 4 bar (water) l/min.	Cat. No.:
14	75	3,2	D 625-20
18	75	4,0	D 625-40
25	79	10,5	D 625-60

**Applications:**

Ideal for conducting highly pure or aggressive products.



## BOLA INNOVATION

### GL-Fittings

They are mainly used to fix the same diameters on both sides. Together with BOLA Laboratory Screw Joints, they can also be used as reductions.

## BOLA Thread Adaptor GL

Material:	Temperature resistance:	Chemical resistance:	Pressure:	Vacuum:
PTFE	from -200 °C to +250 °C	+++ universal	10 bar	suitable

**Product description:**

Straight transition fitting made of PTFE, two GL-threaded connections. Universal chemical resistance, the medium is only exposed to PTFE.

**NEW**

FDA conform

From male thread GL	to male thread GL	Cat. No.:
14	18	D 537-04
14	25	D 537-08
18	25	D 537-12
25	45	D 537-16

**Applications:**

Reduction to connect different tube and tubing diameters with BOLA Laboratory Screw Joints.



## BOLA GL-Screw-in Tube Fittings

Material: **PTFE**    Temperature resistance: **from -200 °C to +250 °C**    Chemical resistance: **+++ universal**    Pressure: **10 bar**    Vacuum: **suitable**

Product description:

Straight tube fitting made of PTFE, with one screw-in thread (either NPT or G thread). Universal chemical resistance, the product is only exposed to PTFE.

FDA conform

Screw-in thread NPT	Thread GL	Bore dia. mm	Wrench size hexagon mm	Cat. No.:
1/8"	14	4,0	15	D 516-08
1/4"	14	5,0	15	D 516-14
3/8"	14	6,5	19	D 516-20
1/8"	18	4,0	19	D 516-26
1/4"	18	6,5	19	D 516-32
3/8"	18	8,0	19	D 516-38
3/8"	25	8,0	27	D 516-44
1/2"	25	12,0	27	D 516-50

Screw-in thread G	Thread GL	Bore dia. mm	Wrench size hexagon mm	Cat. No.:
1/8"	14	4,0	15	D 517-08
1/4"	14	5,0	15	D 517-14
3/8"	14	6,5	19	D 517-20
1/8"	18	4,0	19	D 517-26
1/4"	18	6,5	19	D 517-32
3/8"	18	8,0	19	D 517-38
1/2"	25	12,0	27	D 517-50
1"	32	18,0	34	D 517-74

« »  
Special Request?  
+49 (0) 93 46-92 86-0



**BOLA**  
**Practical Tip**

Marion Stoppel » construction

**You don't know which thread type and size you have in your hands?**

Our scale thread illustrations help to make an optical comparison.

see page 294

## BOLA GL Stopcocks

**BESTSELLER**

Material: PTFE	Temperature resistance: from -0°C to +110°C	Chemical resistance: +++ universal	Pressure: 6 bar	Vacuum: suitable
-------------------	--	---------------------------------------	--------------------	---------------------

**Product description:**

Two-way stopcock with straight bore and two connections with GL thread or three-way stopcock with L-shaped or T-shaped bore and three connections with GL thread. Cylindrical stopcock plug for good tightness, stop valve with mark of flow direction. Suitable for pressure up to max. 6 bar, or for vacuum. Universal chemical resistance, the flowing product is only exposed to PTFE.

FDA conform

	Type	Bore shape	Bore dia. mm	Connecting thread GL	External dimensions L / D / H mm	Cat. No.:
<b>A</b>	2-Way	—	4	14	54 x 20 x 38	E 684-14
	2-Way	—	6	18	64 x 30 x 45	E 684-18
	2-Way	—	8	25	78 x 40 x 57	E 684-25
<b>B</b>	3-Way	L	4	14	64 x 47 x 43	E 686-14
	3-Way	L	6	18	74 x 57 x 57	E 686-18
	3-Way	L	6	25	78 x 59 x 57	E 686-25
<b>C</b>	3-Way	T	4	14	74 x 57 x 57	E 688-14
	3-Way	T	4	18	74 x 57 x 57	E 688-18
	3-Way	T	6	25	88 x 69 x 57	E 688-25

**Applications:**

For distributing liquids or gases. Quick and easy disconnection of flow. Connection of tubing or tubes by means of BOLA Laboratory Screw Joints.



## BOLA Ground Joint-GL 2-Way Stopcocks

Material: PTFE	Temperature resistance: from -0°C to +110°C	Chemical resistance: +++ universal	Pressure: 6 bar	Vacuum: suitable
-------------------	--	---------------------------------------	--------------------	---------------------

**Product description:**

Ground joint 2-way-stopcock with straight bore and one connection with GL thread or ground joint 3-way-stopcock with T-shaped bore and two connections with GL thread. Cylindrical stopcock plug for good tightness, stop valve with mark of flow direction. Suitable for pressures up to max. 6 bar, or for vacuum. Universal chemical resistance, the flowing product is only exposed to PTFE.

FDA conform

	Type	Bore shape	Bore dia. mm	Connecting thread GL	For ground joint NS	External dimensions L / D / H mm	Cat. No.:
<b>A</b>	2-Way	—	6	18	29/32	100 x 40 x 57	E 689-18
<b>B</b>	3-Way	L	6	18	29/32	116 x 57 x 57	E 690-18

**Applications:**

For evacuation of ground joint flasks or distributing liquids or gases. Quick and easy disconnection of flow. Connection of tubing or tubes by means of BOLA Laboratory Screw Joints.



## BOLA GL Ball Valves

Material: <b>PTFE, PPS</b>	Temperature resistance: <b>from -20°C to +200°C</b>	Chemical resistance: <b>+++ universal</b>	Pressure: <b>12 bar</b>	Vacuum: <b>suitable</b>
-------------------------------	--	--	----------------------------	----------------------------

### Product description:


Two-way valve with straight bore and two connections with GL thread or three-way valve with L-shaped bore and three connections with GL thread. Ball-shaped stopcock plug for excellent tightness, free-moving stop valve. Suitable for pressure up to max. 12 bar, or for vacuum. Universal chemical resistance, the flowing product is only exposed to PTFE.

FDA conform

	Type	Bore shape	Bore dia. mm	Connecting thread GL	External dimensions L / D / H mm	Cat. No.:
<b>A</b>	2-Way	—	3	14	50 x 20 x 36	E 664-10
	2-Way	—	4	18	80 x 44 x 65	E 664-20
	2-Way	—	8	25	90 x 50 x 68	E 664-30
	2-Way	—	12	32	100 x 50 x 74	E 664-40
<b>B</b>	3-Way	L	3	14	50 x 20 x 52	E 667-10
	3-Way	L	4	18	80 x 40 x 90	E 667-20
	3-Way	L	8	25	90 x 50 x 98	E 667-30
	3-Way	L	12	32	100 x 50 x 106	E 667-40

### Applications:

For distributing liquids or gases. Quick and easy disconnection of flow. Connection of tubing or tubes by means of BOLA Laboratory Screw Joints.

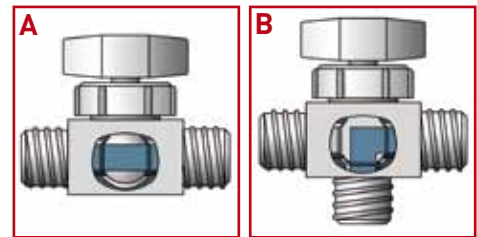

### GL Stopcocks

» GL Stopcocks allow to work with pressure of up to max. 6 bar. Assembled with BOLA Screw Joints, they are absolutely tight and therefore also appropriate for aggressive products. «

Krzysztof Kucias » Hitec Zang GmbH

## BOLA GL-Distributor with Stopcock

Material: <b>PTFE, PP</b>	Temperature resistance: <b>from -0 °C to +110 °C</b>	Chemical resistance: <b>+++ universal</b>	Pressure: <b>6 bar</b>
------------------------------	---	--	---------------------------

### Product description:

Distributor body made of PTFE with six lateral, GL-threaded connectors and one on the bottom. Conical stopcock made of PTFE with L-Bore for good sealing and knurled grip made of PP for marking and regulation of flow direction. Universal chemical resistance, the flowing product is only exposed to PTFE.


NEW

Bore shape Stopcock	Bore dia. mm	Supply / Drain GL-neck	For tubing O.D. mm	Outer dimensions Dia. x H mm	Cat. No.
L	4	6x 14 / 1x 14	7x 8,0	84 x 80	E 661-14

FDA conform

### Applications:

For distribution of liquids and gases. Quick and easy disconnection of flow. For dosage from one source to six recipients. Also usable as a drain valve to collect liquids from several sources in one recipient. Connection of tubing or tubes by means of BOLA Laboratory Screw Joints.

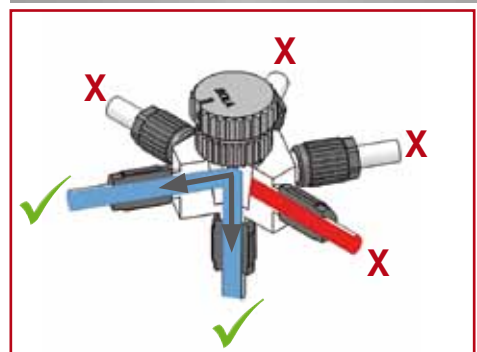

**BOLA Pressure-Relief Valves with Manual Ventilation****BESTSELLER**

Material: <b>PTFE, PPS</b>	Temperature resistance: <b>from -20°C to +250°C</b>	Chemical resistance: <b>+++ universal</b>	Pressure: <b>10 bar</b>
-------------------------------	--	--	----------------------------

**Product description:**



Body made of PTFE with two connections with GL 18 thread, valve made of PPS with toggle for manual ventilation by pulling and adjusting screw with conternut for adjusting and fixing of requested pressure in a range between 0,1 and 10 bar (factory setting 1,5 bar). Universal chemical resistance, the flowing product is only exposed to PTFE.

FDA conform

Connecting thread GL	Bore dia. mm	External dimensions L x D x H mm	Cat. No.:
18	6	88 x 54 x 116	E 683-18

**Applications:**

Pressure control valve with adjustable opening pressure. For preventing pressure drop during filling.

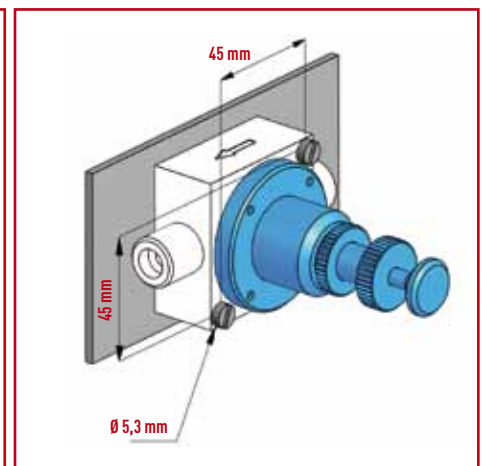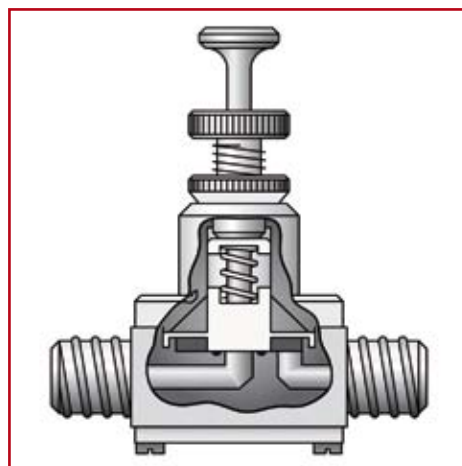



## BOLA GL Control Valves

Material:	Temperature resistance:	Chemical resistance:	Pressure:
PTFE, PPS	from -20°C to +250°C	+++ universal	10 bar

**Product description:**



Two-way valve with straight bore and two connections with GL thread completely made of PTFE. Motionless sealing without wearing parts due to integrated bellow. For best possible tightness even with considerable thermal fluctuations, the conical nipple of the bellow is prestressed by means of a spring. The valve can be opened and closed by turning the adjusting nut; a nipple on the top indicates the angle of opening. Suitable for pressure up to max. 6 bar, suitable for vacuum. Universal chemical resistance, the flowing product is only exposed to PTFE.

FDA conform

Connecting thread GL	Bore dia. mm	External dimensions L x D x H mm	Cat. No.:
14	4	62 x 30 x 73	E 694-14
18	6	80 x 44 x 83	E 694-18

**Applications:**

For distributing liquids or gases. Manual regulation for constant flow. Connection of tubing or tubes by means of BOLA Laboratory Screw Joints.

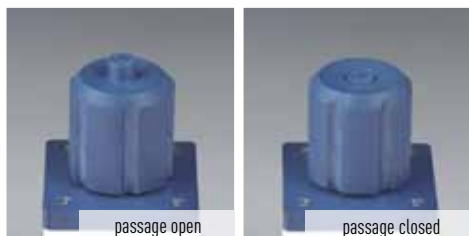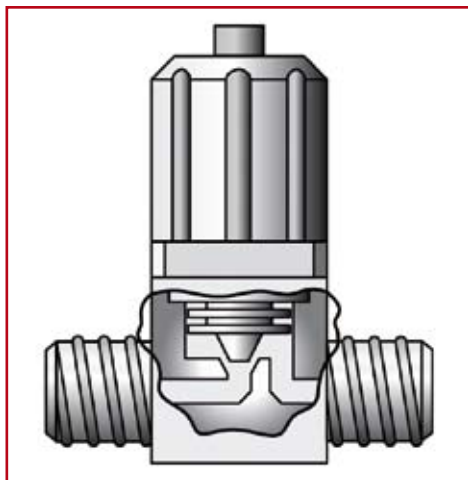

## BOLA Hose Connectors (with Nut)

**BESTSELLER**

Material: <b>PFA, PPS</b>	Temperature resistance: <b>from -20°C to +200°C</b>	Chemical resistance: <b>+++ universal</b>	Vacuum: <b>suitable</b>
------------------------------	--	--	----------------------------

### Product description:

GL 14 and GL 18 hose connectors made of PFA, GL 25 and GL 32 hose connectors made of PTFE. With elastic sealing lip, FPM o-ring and nut made of PPS. Available as straight or bent type. Universal chemical resistance, for working temperatures up to max. +200°C. The flowing product is only exposed to PFA or PTFE.

FDA conform

### Straight type

	Thread GL	O.D. of hose connector mm	I.D. of hose connector mm	Length with nut mm	Cat. No.:
<b>A</b>	14	8,7	6,0	45	<b>D 581-02</b>
	18	10,4	7,0	51	<b>D 581-04</b>
	25	16,0	10,0	68	<b>D 581-06</b>
	32	21,0	16,0	80	<b>D 581-08</b>

### Bent type

	Thread GL	O.D. of hose connector mm	I.D. of hose connector mm	Length with nut mm	Cat. No.:
<b>B</b>	14	8,7	6,0	49	<b>D 582-02</b>
	18	10,4	7,0	65	<b>D 582-04</b>

### Applications:

For connecting elastic tubing to GL-threaded equipment.



## BOLA INNOVATION

### Hose Connectors with Sealing Lip

BOLA Hose Connectors are provided with an o-ring which is protected by a sealing lip. This o-ring can compensate unevenness on the top of the thread. The liquid is only in contact with the sealing lip.

## BOLA Hose Connectors (without Nut)

Material: <b>PFA</b>	Temperature resistance: <b>from -20°C to +200°C</b>	Chemical resistance: <b>+++ universal</b>	Vacuum: <b>suitable</b>
-------------------------	--	--	----------------------------

### Product description:

GL 14 and GL 18 hose connectors made of PFA, GL 25 and GL 32 hose connectors made of PTFE. With elastic sealing lip and FPM o-ring. Available as straight or bent type. Universal chemical resistance, for working temperatures up to max. +200°C. The flowing product is only exposed to PFA or PTFE.

FDA conform

### Straight type

	Thread GL	O.D. of hose connector mm	I.D. of hose connector mm	Length without nut mm	Cat. No.:
<b>A</b>	14	8,7	6,0	34	<b>D 568-14</b>
	18	10,4	7,0	39	<b>D 568-18</b>
	25	16,0	10,0	55	<b>D 568-25</b>
	32	21,0	16,0	65	<b>D 568-32</b>

### Bent type

	Thread GL	O.D. of hose connector mm	I.D. of hose connector mm	Length without nut mm	Cat. No.:
<b>B</b>	14	8,7	6,0	40	<b>D 569-14</b>
	18	10,4	7,0	54	<b>D 569-18</b>



## BOLA Hose Connectors (with Nut)

Material: PP	Temperature resistance: from -0°C to +110°C	Chemical resistance: ++ very good	Vacuum: suitable
-----------------	--	--------------------------------------	---------------------

Product description:

Hose connectors made of PP, with elastic sealing lip, FPM o-ring and nut made of PBTP. Available as straight or bent type. Restricted chemical resistance, for working temperatures up to max. +110°C. The flowing product is only exposed to PP.

FDA conform

### Straight type

	Thread GL	O.D. of hose connector mm	I.D. of hose connector mm	Length with nut mm	Cat. No.:
<b>A</b>	14	8,8	6,0	46	D 585-14
	18	10,8	7,0	52	D 585-18
	25	16,0	10,0	68	D 585-25

### Bent type

	Thread GL	O.D. of hose connector mm	I.D. of hose connector mm	Length with nut mm	Cat. No.:
<b>B</b>	14	8,8	6,0	51	D 586-14
	18	10,8	7,0	66	D 586-18

### Applications:

For connecting elastic tubing to GL-threaded equipment.



## BOLA Hose Connectors (without Nut)

Material: PP	Temperature resistance: from -0°C to +110°C	Chemical resistance: ++ very good	Vacuum: suitable
-----------------	--	--------------------------------------	---------------------

Product description:

Hose connectors made of PP, with elastic sealing lip and FPM o-ring. Available as straight or bent type. Restricted chemical resistance, for working temperatures up to max. +110°C. The flowing product is only exposed to PP.

FDA conform

### Straight type

	Thread GL	O.D. of hose connector mm	I.D. of hose connector mm	Length without nut mm	Cat. No.:
<b>A</b>	14	8,8	6,0	36	D 583-14
	18	10,8	7,0	40	D 583-18
	25	16,0	10,0	55	D 583-25

### Bent type

	Thread GL	O.D. of hose connector mm	I.D. of hose connector mm	Length without nut mm	Cat. No.:
<b>B</b>	14	8,8	6,0	41	D 584-14
	18	10,8	7,0	56	D 584-18





# Screw Joints / Components for Ex-Protection



117

Static charging and handling of highly inflammable liquids and gases in combination carry a significant risk potential. BOLA offers an extensive assortment of components made of static dissipative plastics with a high thermal and chemical resistance to prevent static charging.

## PRODUCT TIPS



Page 122  
Distributors for Bottles EX



Page 125:  
Antistatic Explosion Proof  
Tubing EX



Page 128:  
Stirrer Shafts EX

## Screw Joints / Components for Ex-Protection

### A safe protection against electrostatic charging



#### How does electrostatic charging occur?

Electrostatic charging occurs if the charge particles from surfaces made of insulating materials interchange with the charge particles of surfaces made of conductive materials. If the two surfaces are quickly separated after such a charge exchange the transferred charging cannot flow back to its original source especially with insulating materials. On the one side this leads to an excess charge whereas on the other side it leads to a lack of electrostatic charging. This generates an electrical voltage.

Once the voltage is high enough it will discharge when it gets in contact with a conductive surface. This generates a spark which can ignite solvent vapours or highly combustible liquids.

A separation as described above can happen during decanting of large packages as well as during transportation of products in hose pipes or operation of a stirrer shaft in a stirrer bearing.

#### How can electrostatic charging be prevented?

Electrostatic charging and the related hazards can be dissipated by means of a connection with earth. Therefore the pipes, components and packages have to be made of static dissipative materials to prevent an electrostatic charging.

#### What is the advantage of BOLA Ex-Protection Components?

All Ex-Protection Components of BOLA are made of static dissipative PTFE-EX, PFA-EX or PPS-EX. Due to the addition of conductive pigments, e.g. carbon black or electrographitised carbon the technically insulating plastics become conductive as well. At the same time the good chemical and thermal resistance of PTFE are conserved.

In the delivery state all products from BOLA made of PTFE-EX, PFA-EX or PPS-EX have a surface resistance of  $10^6$  Ohm or better.

In individual cases the added conductive pigments can be damaged by strongly oxidizing products ( $H_2O_2$ , ozone, acids such as azotic acid, lyes, halogens). Thus the conductive pigments can be dissolved and the Components lose their discharge capability. An indication is also the bleaching of the black colour of the EX-Protection components. In extreme cases of a complete oxidation, PTFE e.g. can superficially take the colour grey or white again. In these cases we recommend the renewal of the component to guarantee a safe operation.

PTFE-EX, PFA-EX as well as PPS-EX are inherently flame-retardant and self-extinguishing. The oxygen index (LOI-value) stands for the oxygen content in the ambient atmosphere in which material continues burning after ignition without additional energy source. The oxygen index of PTFE-EX and PFA-EX is approx. 95 %, the oxygen index of PPS-EX is approx. 50 %. This means all materials do not burn under normal conditions since the oxygen content of the air is approx. 21 %.

The materials are dyed black and therefore UV-resistant. Consequently they can be used for products which react to UV rays.

#### How is earthing made?

Connection to earth is made by connecting a cable clamp or a ground clip to a provided earthing bore. The earthing of the complete system has to be executed professionally and in compliance to the according instructions.

#### How can I identify BOLA Ex-Protection Components?

All BOLA EX-Protection Components made of PTFE-EX can be identified by their black colour. Screw Caps made of PPS-EX are inscribed accordingly. In case of ambiguities, an attrition test can help. The component is rubbed slightly on a white piece of paper. A colouration indicates that the component has conductive particles. Only the measuring of the surface resistance respectively of the specific contact resistance absolutely proves whether the items are made of static dissipative material.

## BOLA Laboratory Screw Joints EX

Material:	Temperature resistance:	Chemical resistance:	Pressure:	Vacuum:	Conductivity:
PTFE-, PPS-EX	from -200°C to +250°C	++ very good	10 bar	suitable	10 <sup>6</sup> Ohm



Product description:

Screw cap made of conductive black PPS-EX reinforced with glass fibres, inner parts made of conductive PTFE-EX

For tubing O.D. mm	Thread GL	Cat. No.:
4	14	D 840-66
6	14	D 840-74
4	18	D 841-46
6	18	D 841-54
8	18	D 841-62
10	18	D 841-74
8	25	D 842-62
10	25	D 842-74
12	25	D 842-80
14	25	D 842-90

### Applications:

Connecting equipment and fittings with GL threads with hard-walled tubing or tubes made of glass, plastic or metal. Fixing probes, thermometers, dip tubes or cables in reaction vessels.

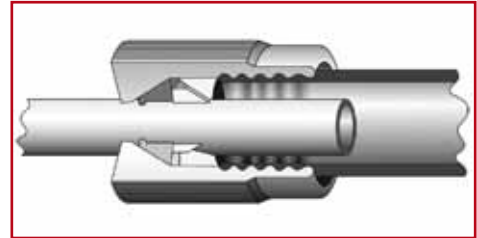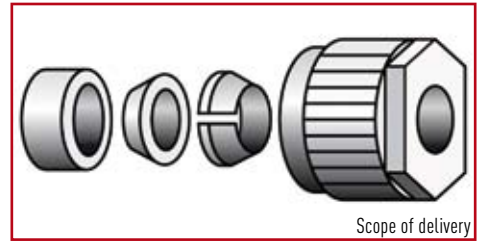

### HELPFUL: page 70

Detailed information on the assembly and function of BOLA Laboratory Screw Joints.


## BOLA Replacement Inner Parts EX

Material:	Temperature resistance:	Chemical resistance:	Pressure:	Vacuum:	Conductivity:
PTFE-EX	from -200°C to +250°C	++ very good	10 bar	suitable	10 <sup>6</sup> Ohm

Product description:

Made of conductive PTFE-EX.

For tubing O.D. mm	Thread GL	Cat. No.:
4	14	D 848-66
6	14	D 848-74
4	18	D 849-46
6	18	D 849-54
8	18	D 849-62
10	18	D 849-74
8	25	D 850-62
10	25	D 850-74
12	25	D 850-80
14	25	D 850-90

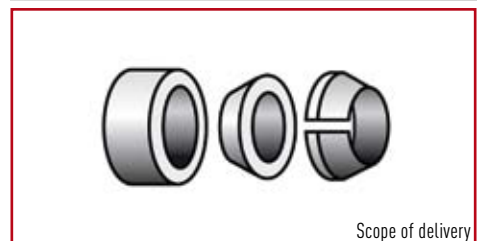

## BOLA Replacement Caps EX


Material: <b>PPS-EX</b>	Temperature resistance: <b>from -20°C to +250°C</b>	Chemical resistance: <b>++ very good</b>	Conductivity: <b>10<sup>6</sup> Ohm</b>
----------------------------	--	---	--

Product description:

Black screw cap made of glass-fibre PPS-EX, with handy knurl and hexagon.

Thread GL	From tubing O.D. to tubing O.D. mm	Cat. No.:
14	0,8 - 6,0	<b>D 846-10</b>
18	0,8 - 10,0	<b>D 846-20</b>
25	0,8 - 10,0	<b>D 846-30</b>
25	10,1 - 14,0	<b>D 846-34</b>





### Tube Fittings EX

»» BOLA Tube Fittings EX are electro conductive and chemically inert at the same time. They can be used with inflammable liquids or gas in explosive areas. ««

Hans Kneuss » Glass Technology

## BOLA BOLA GL Tube Fittings EX

Material: <b>PTFE-EX</b>	Temperature resistance: <b>from -200°C to +250°C</b>	Chemical resistance: <b>++ very good</b>	Pressure: <b>10 bar</b>	Vacuum: <b>suitable</b>	Conductivity: <b>10<sup>6</sup> Ohm</b>
-----------------------------	---	---	----------------------------	----------------------------	--

Product description:

Straight tube fitting made of PTFE-EX, two connections with GL thread. Connection of tubing or tube with BOLA Laboratory Screw Joints EX.

Thread GL	Bore dia. mm	Length without screw joint mm	Wrench size hexagon mm	Cat. No.:
14	6,5	50	15	<b>D 856-14</b>
18	10,5	50	19	<b>D 856-18</b>
25	14,5	56	27	<b>D 856-25</b>

**Applications:**

For distributing liquids or gases. As reduction for connecting different diameters of tubes or tubing.



««      »»  
Special Request?  
+49 (0) 93 46-92 86-0



## BOLA GL Tube Fittings T EX

Material: <b>PTFE-EX</b>	Temperature resistance: <b>from -200°C to +250°C</b>	Chemical resistance: <b>++ very good</b>	Pressure: <b>10 bar</b>	Vacuum: <b>suitable</b>	Conductivity: <b>10<sup>6</sup> Ohm</b>
-----------------------------	---	---	----------------------------	----------------------------	--

Product description:

Tube fitting T-shaped made of PTFE-EX, three connections with GL thread. Connection of tubing or tube with BOLA Laboratory Screw Joints EX.

Thread GL	Bore dia. mm	Length without screw joint mm	Wrench size square mm	Cat. No.:
14	6,5	50	20	<b>D 857-14</b>
18	10,5	56	20	<b>D 857-18</b>
25	14,5	70	27	<b>D 857-25</b>

### Applications:

For distributing liquids or gases. As reduction for connecting different diameters of tubes or tubing.



## BOLA GL Tube Fittings Elbow EX

Material: <b>PTFE-EX</b>	Temperature resistance: <b>from -200°C to +250°C</b>	Chemical resistance: <b>++ very good</b>	Pressure: <b>10 bar</b>	Vacuum: <b>suitable</b>	Conductivity: <b>10<sup>6</sup> Ohm</b>
-----------------------------	---	---	----------------------------	----------------------------	--

Product description:

Tube fitting elbow-shaped made of PTFE-EX, two connections with GL thread. Connection of tubing or tube with BOLA Laboratory Screw Joints EX.

Thread GL	Bore dia. mm	Length without screw joint mm	Wrench size square mm	Cat. No.:
14	6,5	37	20	<b>D 858-14</b>
18	10,5	39	20	<b>D 858-18</b>
25	14,5	51	27	<b>D 858-25</b>

### Applications:

For distributing liquids or gases. As reduction for connecting different diameters of tubes or tubing.



## BOLA GL Tube Fittings Cross EX

Material: <b>PTFE-EX</b>	Temperature resistance: <b>from -200°C to +250°C</b>	Chemical resistance: <b>++ very good</b>	Pressure: <b>10 bar</b>	Vacuum: <b>suitable</b>	Conductivity: <b>10<sup>6</sup> Ohm</b>
-----------------------------	---	---	----------------------------	----------------------------	--

Product description:

Tube fitting cross-shaped made of PTFE-EX, four connections with GL thread. Connection of tubing or tube with BOLA Laboratory Screw Joints EX.

Thread GL	Bore dia. mm	Length without screw joint mm	Wrench size square mm	Cat. No.:
14	6,5	54	20	<b>D 859-14</b>
18	10,5	56	20	<b>D 859-18</b>
25	14,5	70	27	<b>D 859-25</b>

### Applications:

For distributing liquids or gases. As reduction for connecting different diameters of tubes or tubing.



## BOLA GL-Stopcocks EX

Material:	Temperature resistance:	Chemical resistance:	Pressure:	Vacuum:	Conductivity:
PTFE-EX, PP	from 0°C to +110°C	++ very good	6 bar	suitable	10 <sup>6</sup> Ohm

### Product description:

Two-way stopcock made of conductive PTFE-EX with straight bore and two connections with GL thread or three-way stopcock with L-shaped or T-shaped bore and three connections with GL thread. Cylindrical stopcock plug made of conductive PTFE-EX for good tightness, stop valve with mark of flow direction. Grip made of red PP. Suitable for pressure up to max. 6 bar, suitable for vacuum. Connection of tubing or tube with BOLA Laboratory Screw Joints EX.

Type	Bore shape	Bore dia. mm	Connecting thread GL	External dimensions L / D / H mm	Cat. No.:
<b>A</b>	2-Way	—	4	54 x 20 x 38	E 712-14
	2-Way	—	6	64 x 30 x 45	E 712-18
	2-Way	—	8	78 x 40 x 57	E 712-25
<b>B</b>	3-Way	L	4	64 x 47 x 43	E 714-14
	3-Way	L	6	74 x 57 x 57	E 714-18
	3-Way	L	6	78 x 59 x 57	E 714-25
<b>C</b>	3-Way	T	4	74 x 57 x 57	E 716-14
	3-Way	T	4	74 x 57 x 57	E 716-18
	3-Way	T	6	88 x 69 x 57	E 716-25

### Applications:

For distributing liquids or gases. Quick and easy disconnection of flow.



## BOLA Multiple Distributors for Bottles EX

Material:	Temperature resistance:	Chemical resistance:	Pressure:	Vacuum:	Conductivity:
PTFE-, PPS-EX	from -20°C to +200°C	++ very good	10 bar	suitable	10 <sup>6</sup> Ohm

### Product description:


Screw cap black for thread GL 45 made of conductive PPS-EX. Distributor body made of conductive PTFE-EX with GL-threaded necks. Tubes can be inserted through the necks. Connection of tubes and tubing by means of BOLA Laboratory Screw Joints EX.

Detailed information in the product description of the identical Multiple Distributors for Bottles on page 76.

	Necks GL	For tubing O. D. mm	Cat. No.:
<b>A</b>	2 x 14	2 x 8,0	D 864-08
<b>B</b>	3 x 14	3 x 8,0	D 865-08
<b>NEW C</b>	3 x 25	3 x 14,0	D 866-08

### Applications:

Drawing or inserting aggressive or pure liquids. Inserting tubing, tubes and probes into jars. Static charges can be dissipated by means of an earthing connection on the distributor body.

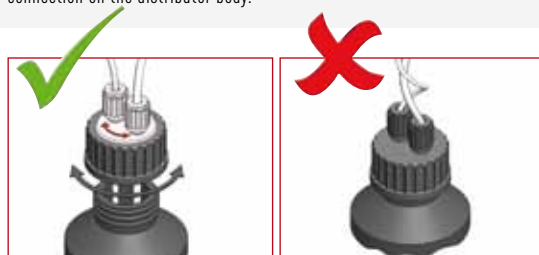

## BOLA Multiple Distributors for Barrels EX

Material:	Temperature resistance:	Chemical resistance:	Vacuum:	Conductivity:
PTFE-EX	from -20 °C to +200 °C	++ very good	suitable	10 <sup>6</sup> Ohm

Product description:

Screw cap for barrels with female thread and body with GL-threaded necks made of conductive PTFE-EX. Bore with female thread M5x6 for connecting a grounding cable. GL-threaded necks for inserting tubing with a max. O.D. of 14 mm. Connection of tubing or tubes by means of BOLA Laboratory Screw Joints EX.


Detailed information in the product description of the identical Multiple Distributors for Barrels on page 90.

**NEW**

For female barrel thread	Necks GL	For tubing O.D. max. mm	Cat. No.
G 2" / BSP2"	2x 18 / 1x 25	2x 10 / 1x 14	D 693-14
Tri-Sure 2"	2x 18 / 1x 25	2x 10 / 1x 14	D 695-14

### Applications:

Drawing or inserting aggressive or pure liquids. Inserting tubing, tubes and probes into barrels. Quick and easy discharging of electrostatic charging by means of a grounding cable which can be connected to the body.

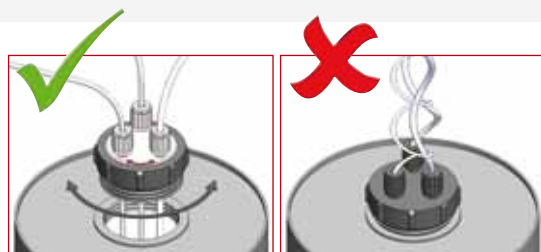

123

SCREW JOINTS / COMPONENTS FOR EX-PROTECTION

## BOLA Distributors for Canisters EX

Material:	Temperature resistance:	Chemical resistance:	autoclave:	Conductivity:
PTFE-EX	from -20 °C to +200 °C	++ very good	121 °C	10 <sup>6</sup> Ohm

Product description:

Screw cap and movable body with GL-threaded necks made of conductive PTFE EX. Without earthing connection. Earthing is made via a conductive canister. Connection of tubing made by BOLA Laboratory Screw Joints EX.


Detailed information in the product description of the identical Multiple Distributors for Barrels on page 88.

**NEW**

Canister Thread	Necks GL	For tubing O.D. max. mm	Cat. No.
55	2x 14 / 1x 18	2x 8 / 1x 10	D 772-08
60	3x 18	3x 10	D 772-20
65	3x 18	3x 10	D 772-32

### Applications:

Drawing or inserting aggressive or pure liquids. Inserting tubing, tubes and probes into canisters.

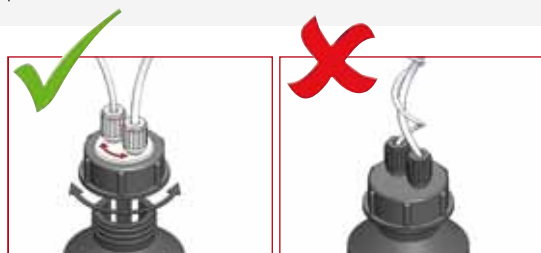

## BOLA Screw Caps with Aperture EX

Material: PPS-EX	Temperature resistance: from -20 °C to +250 °C	Chemical resistance: ++ very good	Conductivity: 10 <sup>6</sup> Ohm
---------------------	---	--------------------------------------	--------------------------------------

Product description:

Screw cap with handy knurl, suitable for GL threads, with aperture, made of conductive PPS-EX.

**NEW**

For thread GL	Bore dia. mm	Cat. No.:
14	9,2	H 898-14
18	11,0	H 898-18
25	15,0	H 898-25
45	34,0	H 898-45



## BOLA GL Reductions EX

Material: PTFE-, PPS-EX	Temperature resistance: from -20 °C to +250 °C	Chemical resistance: ++ very good	Conductivity: 10 <sup>6</sup> Ohm
----------------------------	---	--------------------------------------	--------------------------------------

Product description:

Black screw cap made of PPS-EX, movable reduction body made of PTFE-EX with o-ring made of FPM for transition to GL threads. The body can be moved independently from the screw cap so that the completely assembled reduction can be removed and fixed on another vessel without the risk of disarranging the tubing or cable. The product is only exposed to PTFE-EX.

**NEW**

From screw cap GL	to thread GL	max. tubing O.D. mm	Cat. No.:
18	14	0,8 - 10,0	D 872-05
25	14	0,8 - 10,0	D 872-10
25	18	1,6 - 10,0	D 872-15
45	14	0,8 - 8,0	D 872-20
45	18	1,6 - 10,0	D 872-25

**Applications:**

For connecting or inserting tubing, tubes or probes. Static charges can be dissipated through earthing the connected components.



## BOLA Hose Connector EX (with Nut)

Material: PTFE-, PPS-EX	Temperature resistance: from -20 °C to +200 °C	Chemical resistance: ++ very good	Conductivity: 10 <sup>6</sup> Ohm
----------------------------	---	--------------------------------------	--------------------------------------

Product description:

Hose connectors made of PTFE-EX. With elastic sealing lip, FPM o-ring, and nut made of PPS-EX with GL thread. Available as straight type. The medium is only exposed to PTFE-EX.

**NEW**

Thread GL	O. D. of Hose Connector mm	I. D. of Hose Connector mm	Length with nut mm	Cat. No.
14	8,7	6,0	45	D 874-02
18	10,4	7,0	51	D 874-04
25	16,0	10,0	68	D 874-06

**Applications:**

For connecting elastic tubing to GL-threaded equipment. Static charges can be dissipated through earthing the connected components.





## BOLA Flexible Tubing Ex

Material: PFA-EX    Temperature resistance: from -200°C to +260°C    Chemical resistance: +++ universal    Conductivity: 10<sup>6</sup> Ohm

**Product description:**

Static dissipative, corrugated tubing with nominal width 10 and with circular corrugations around the longitudinal axis. Cylindrical tubing ends with a length of 40 mm can for example be connected directly to fittings, stopcocks or hose connectors. Together with BOLA Laboratory Screw Joints EX, the connection is static dissipative, absolutely tight and suitable for vacuum.



Tubing end		Bending radius <sup>1</sup> mm	Burst pressure <sup>2</sup> bar	Length 0,5 m Cat. No.:	Length 1,0 m Cat. No.:	Length 2,5 m Cat. No.:
I.D.	O.D.					
4	6	18	11	S 1824-24	S 1824-54	S 1824-74
6	8	18	11	S 1824-27	S 1824-57	S 1824-77
8	10	18	11	S 1824-30	S 1824-60	S 1824-80
10	12	18	11	S 1824-33	S 1824-63	S 1824-83
12	14	18	11	S 1824-35	S 1824-65	S 1824-85

**NEW**

**Product advantages:**


- » conductive with surface resistance of 10<sup>5</sup> Ohm
- » flexible to highly flexible
- » tight bending radius only causes little cross-section reduction
- » non-porous

**Applications:**

- » antistatic applications
- » in explosive ambience (explosion protection)
- » for easy handling of liquids and gases
- » for transport of solvents or alcohols
- » ideal for connections under vibrations
- » usable with a small bending radius
- » for compensation of thermal expansions



**SUITABLE:** page 119  
Conductive fittings and stopcocks made of PTFE-EX

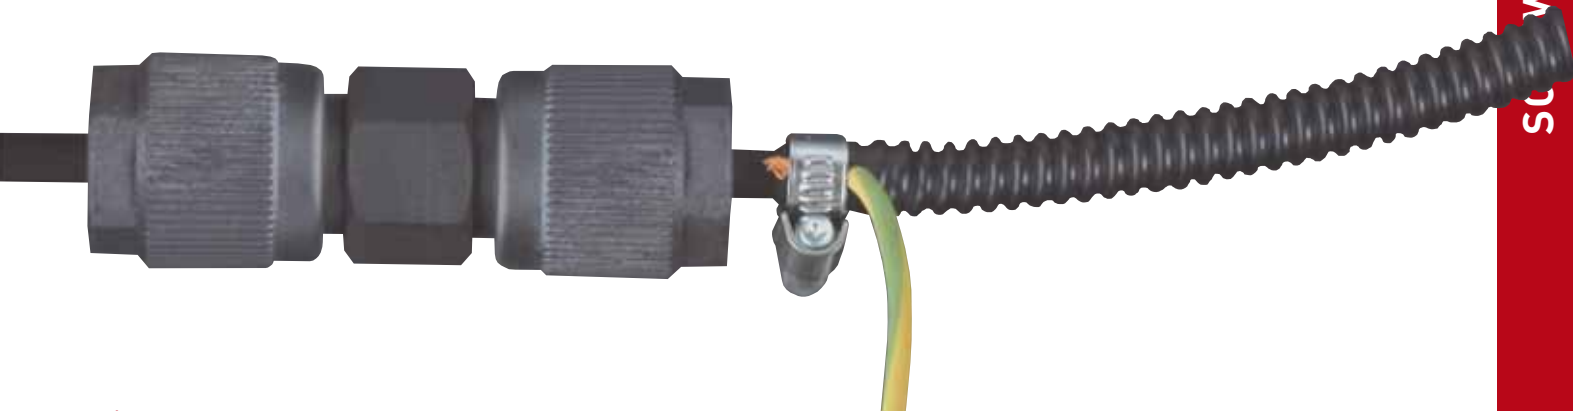

<sup>1</sup> Bending radius: minimum bending radius in mm at a room temperature of 23°C

<sup>2</sup> Burst pressure: computed value in bar at a room temperature of 23°C. It is recommended to restrict the maximum working pressure to 25% of the burst pressure. For higher temperatures, this value has to be multiplied by the reduction factor shown on page 284. It is the user's responsibility to check if the used tubing fulfils the respective requirements.



## BOLA BENEFITS

- » extensive chemical resistance due to PTFE parts
- » resistance of less than  $10^6$  Ohm according to EN 12115 directive
- » ideal for light-sensitive substances

### BOLA Antistatic Explosion-Proof Tubing

**BESTSELLER**

Material: PTFE-EX    Temperature resistance: from -200°C to +250°C    Chemical resistance: +++ universal    Conductivity: 10<sup>6</sup> Ohm

#### Product description:


Very good electric conductivity due to a special "antistatic compound" made of pure PTFE and finest, highly pure carbon dust (less than 2,5%).  
Colour: black

FDA conform

I.D. mm	O.D. mm	Wall thickness mm	Bending radius <sup>1</sup> mm	Burst pressure <sup>2</sup> bar	Cat. No.:
(1/32") 0,8	(1/16") 1,6	0,4	7	140	S 1827-10
(1/16") 1,6	(1/8") 3,2	0,8	13	140	S 1827-26
2,0	3,0	0,5	18	70	S 1827-30
2,0	4,0	1,0	16	140	S 1827-32
3,0	4,0	0,5	32	46	S 1827-34
4,0	6,0	1,0	36	70	S 1827-40
(11/64") 4,35	(1/4") 6,35	1,0	40	64	S 1827-42
6,0	8,0	1,0	64	46	S 1827-50
8,0	10,0	1,0	100	35	S 1827-60
10,0	12,0	1,0	144	28	S 1827-64
12,0	14,0	1,0	196	23	S 1827-68
14,0	16,0	1,0	256	20	S 1827-74

#### Applications:

- » antistatic applications
- » in explosive ambience (explosion protection)
- » for transport of solvents or alcohols



#### Easy tubing assembly:

Before assembling the tubing on a hose connector, heat it in an oven or with a hot air gun to approx. 60°C. All BOLA products can be heated for easier assembly or disassembly.

<sup>1</sup> Bending radius: minimum bending radius in mm at a room temperature of 23°C

<sup>2</sup> Burst pressure: computed value in bar at a room temperature of 23°C. It is recommended to restrict the maximum working pressure to 25% of the burst pressure. For higher temperatures, this value has to be multiplied by the reduction factor shown on page 284. It is the user's responsibility to check if the used tubing fulfils the respective requirements.



## BOLA BENEFITS

- » the flowing product is only exposed to PFA
- » no chemical restrictions due to the outer conducting stripes
- » resistance less than  $10^6$  Ohm
- » smooth, non-porous interior surface
- » clear visibility of the flowing product
- » no corrosion unlike metal lines or metal meshes
- » almost universal chemical resistance

### BOLA Zebra Explosion-Proof Tubing

**BESTSELLER**

Material: PFA-EX    Temperature resistance: from -200°C to +260°C    Chemical resistance: +++ universal    Conductivity:  $10^6$  Ohm

Product description:

Transparent PFA tubing with black longitudinal conductive stripes on the outer surface. The tubing is absolutely round and can be connected to all common fittings.


**NEW**

FDA conform

I.D. mm	O.D. mm	Wall thickness mm	Bending radius <sup>1</sup> mm	Burst pressure <sup>2</sup> bar	Cat. No.:
2,0	3,0	0,5	15	57	S 1855-30
4,0	6,0	1,0	25	57	S 1855-40
6,0	8,0	1,0	50	41	S 1855-50
8,0	10,0	1,0	80	32	S 1855-60
10,0	12,0	1,0	130	27	S 1855-64

Applications:

- » antistatic applications
- » in explosive ambience (explosion protection)
- » for transport of highly flammable solvents or alcohols
- » for transport of highly pure chemicals and gases

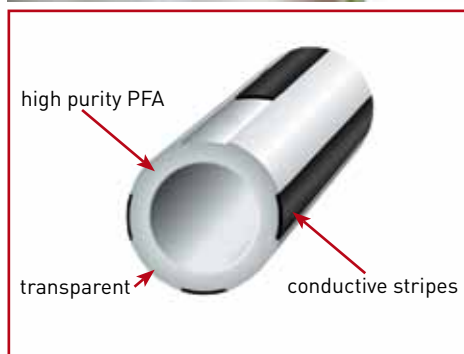

### BOLA INNOVATION

#### Zebra Tubing

Especially made for antistatic applications: Transparent tubing made of PFA with black longitudinal conductive stripes on the outer surface. Provides high chemical resistance and can be used in explosive ambience.

<sup>1</sup> Bending radius: minimum bending radius in mm at a room temperature of 23°C

<sup>2</sup> Burst pressure: computed value in bar at a room temperature of 23°C. It is recommended to restrict the maximum working pressure to 25% of the burst pressure. For higher temperatures, this value has to be multiplied by the reduction factor shown on page 284. It is the user's responsibility to check if the used tubing fulfils the respective requirements.

## BOLA U-Shaped Stirrer Shafts EX

Material: PTFE-EX	Temperature resistance: from -200 °C to +250 °C	Chemical resistance: ++ very good	Conductivity: 10 <sup>6</sup> Ohm
----------------------	--	--------------------------------------	--------------------------------------

Product description:



PTFE-EX jacketed stainless steel shaft, U-shaped stirrer blade completely made of static dissipative PTFE-EX. Good chemical resistance, the product is only exposed to PTFE.

**NEW**

Length mm	Shaft dia. mm	Chucking dia. mm	Dimensions according to drawing				Cat. No.:
			A	B	C	D mm	
350	8	6,5	60	40	25	30	C 284-02

**Applications:**

Strong, tangential flow with high shear rate in the margin area, little sediments on the wall of the vessel. Ideal for mixing viscous liquids. Earthing is made for example via a stirrer bearing made of PTFE-EX (Cat. No. C 423-08 on page 134).



## BOLA Propeller Stirrer Shafts EX

Material: PTFE-EX	Temperature resistance: from -200 °C to +250 °C	Chemical resistance: ++ very good	Conductivity: 10 <sup>6</sup> Ohm
----------------------	--	--------------------------------------	--------------------------------------

Product description:



PTFE-EX jacketed stainless steel shaft, propeller completely made of static dissipative PTFE-EX with three 45° angled angular blades. Good chemical resistance, the product is only exposed to PTFE-EX.

**NEW**

Length mm	Shaft dia. mm	Chucking dia. mm	Dimensions according to drawing			Cat. No.:
			A	B	C mm	
350	8	6,5	75	18	3,0	C 278-12

**Applications:**

The product is sucked bottom-up, good axial flow with low shear force. Earthing is made for example via a stirrer bearing made of PTFE-EX (Cat. No. C 423-08 on page 134).



## BOLA Moon-Shaped Stirrer Shafts EX

Material: PTFE-EX	Temperature resistance: from -200 °C to +250 °C	Chemical resistance: ++ very good	Conductivity: 10 <sup>6</sup> Ohm
----------------------	--	--------------------------------------	--------------------------------------

Product description:



PTFE-EX jacketed stainless steel shaft, tilting half-moon stirrer blade with double-sided groove and access for stirrer shaft completely made of static dissipative PTFE-EX. Good chemical resistance, the product is only exposed to PTFE-EX.

**NEW**

Length mm	Shaft dia. mm	Chucking dia. mm	For ground joint NS	Dimensions acc. to drawing			Cat.No.:
				A	B	C mm	
350	8	6,5	24/29	65	18	3	C 276-02
450	10	8,0	29/32	90	24	3	C 276-14
600	10	8,0	29/32	90	24	3	C 276-16

**Applications:**

Tangential flow with little turbulence. The tilting half-moon blade is ideal for stirring in round-bottom flasks with ground-joint necks. Earthing is made for example via a stirrer bearing made of PTFE-EX (Cat. No. C 423-.. on page 134).





## BOLA Double Temperature Probes PT 100 Lemo® Compact EX

Material: <b>PTFE-EX</b>	Temperature resistance: <b>from -200°C to +250°C</b>	Chemical resistance: <b>++ very good</b>	Temperature range: <b>from -50°C to +250°C</b>	Conductivity: <b>10<sup>6</sup> Ohm</b>
-----------------------------	---	---	---	--

Product description:

Two independent sensors PT 100 in a stainless steel tube (1.4571) encapsulated with static dissipative PTFE-EX. Collar ring Ø 12mm, bore dia. 5 mm for earthing connection. The electric circuits are locally separated complying with European Standard EN 61010-2-010:2013. Connection by two couplings (type Lemo®, socket size 1, 4-wire-system) fixed directly at the end of the probe.

**NEW**

**Typical response times:**

- » T 50: 20 - 24 s
- » T 90: 30 s

See page 282 for detailed explanation.

Usable length mm	Probe dia. mm	Total length mm	Number of sensors	Width of coupling A mm	Cat. No.:
300	8	400	2 x PT 100	27	P 1744-20
400	8	500	2 x PT 100	27	P 1744-23
500	8	600	2 x PT 100	27	P 1744-30

**Applications:**

- » avoiding of electric charging
- » parallel temperature measurement in aggressive liquids
- » double safety due to redundant systems
- » control function due to two independent sensors
- » Suitable for simultaneous temperature measurement and safety circuit as per the specifications of the standard DIN EN 61010-2-010 but only one NS/GL socket will be occupied, separately switched sensors.
- » ideal for built-in measurement cables



## BOLA Temperature Probes PT 100 Lemo® Compact EX

Material: <b>PTFE-EX</b>	Temperature resistance: <b>from -200 °C to +250 °C</b>	Chemical resistance: <b>++ very good</b>	Temperature range: <b>from -50 °C to +250 °C</b>	Conductivity: <b>10<sup>6</sup> Ohm</b>
-----------------------------	---	---	---	--

Product description:

One measuring sensor PT 100 in a stainless steel tube (1.4571) encapsulated with static dissipative PTFE-EX. Temperature probe Ø 8 mm, tip Ø 6 mm, collar ring Ø 12 mm. Electrostatic charges can be discharged by a grounding clamp (not included in the scope of delivery). Connection by a coupling (type Lemo®, socket size 1, 4-wire-system) fixed directly at the end of the probe.

**NEW**

**Typical response times:**

- » T 50: 7 - 12 s
- » T 90: 14 - 16 s

See page 282 for detailed explanation.

Usable length mm	Total length mm	Connector	Cat. No.:
200	270	socket, 4-wire-system	P 1734-10
300	370	socket, 4-wire-system	P 1734-15
400	470	socket, 4-wire-system	P 1734-20
500	570	socket, 4-wire-system	P 1734-25

**Applications:**

- » Avoiding electrostatic charging
- » temperature measurement in aggressive liquids
- » ideal for built-in measurement cables



## BOLA Modular System for Reactor Lids EX



### Worth knowing on the BOLA Modular System for Reactor Lids EX

For a short-term realisation of projects in Mini plant installations or in the production of small quantities in chemical and pharmaceutical industry and research, special components are required that help to start up existing reactors flexibly. The components should have a very good chemical resistance, a permanent durability and should be easily cleanable at the same time.

All these requirements are met by the BOLA Modular System for Reactor Lids EX adapted for standard glass reactors with flat flange from SCHOTT® for sizes DN 60, DN 100 and DN 150.

The Modular System consists of Reactor Lids with different screw-in threads as well as different connections for transition to ground joint components, as stirrer bearings, for connection of probes or tubes and tubing, and stoppers, all with NPT screw-in thread.

By means of the screw-in connections, the Reactor Lid can be arranged to the requirements of your application and project. Thus, a lid can be used most versatile and economic.

All components are made of static dissipative PTFE-EX. This allows to ground the complete system by connecting an earthing cable to the bore M 5x6 on the Reactor Lid EX.

All Reactor Lids EX dispose of a centric screw-in thread NPT for connection of a stirrer bearing. The lateral necks, that even dispose of NPT screw-in threads, are arranged round the centric connector. The special clou is that the angles of lateral necks are made for an insertion of probes and tubes aside the centre in order to avoid collisions with the stirrer shaft and further inserted components.

The large choice of different inserts allows to connect existing equipment with ground joint such as Liebig condensers and dropping funnels as well as GL thread such as lead-in for sensors. The already existing equipment can be further used.



### All features at a glance:

- » Easy assembly
- » Flexibly expandable
- » Compatible with glass reactors with SCHOTT®-flat flange
- » Completely made of static dissipative PTFE-EX, universal chemical resistance
- » With connectors for the use of existing equipment with ground joint or GL thread
- » Also available in virgin PTFE (see page 218)

### Selection and Assembly:


- » Choose a lid that fits onto the flange of your glass reactor, as well as the number of connectors needed.
- » Choose the necessary transition fittings according to NPT threads in the chosen lid.
- » Mount the transition fittings into the connectors of the reactor lid. The lid is now ready for service.
- » All fittings can be acquired separately and can be exchanged amongst each other depending on the NPT thread.
- » Ground the assembled lid by connecting an earthing cable to the bore M5x6 on the reactor lid.

### Custom Manufacture – Lid and Fitting

If we do not even have the correct reactor lid in our wide range, we are pleased to offer you a modified reactor lid or modified components accordingly. Just give us a call: +49 (0) 9346 9286-0 or send us a little sketch with the requested component by e-mail to info@bola.de.


#### Example: Reactor Lid DN 100 EX

- A** Moon-shaped Stirrer Shaft EX  
Cat. No.: C 276-14  
see page 128
- B** Stirrer Bearing EX  
Cat. No.: C 423-10  
see page 134
- C** Screw-in Connector with Ground Joint EX  
Cat. No.: B 174-06  
see page 134
- D** Screw-in Connector with Ground Joint EX  
Cat. No.: B 174-02  
see page 134
- E** Screw-in Connector GL EX  
Cat. No.: B 172-32  
see page 136
- F** Antistatic Tubing  
Cat. No.: S 1827-50  
see page 126

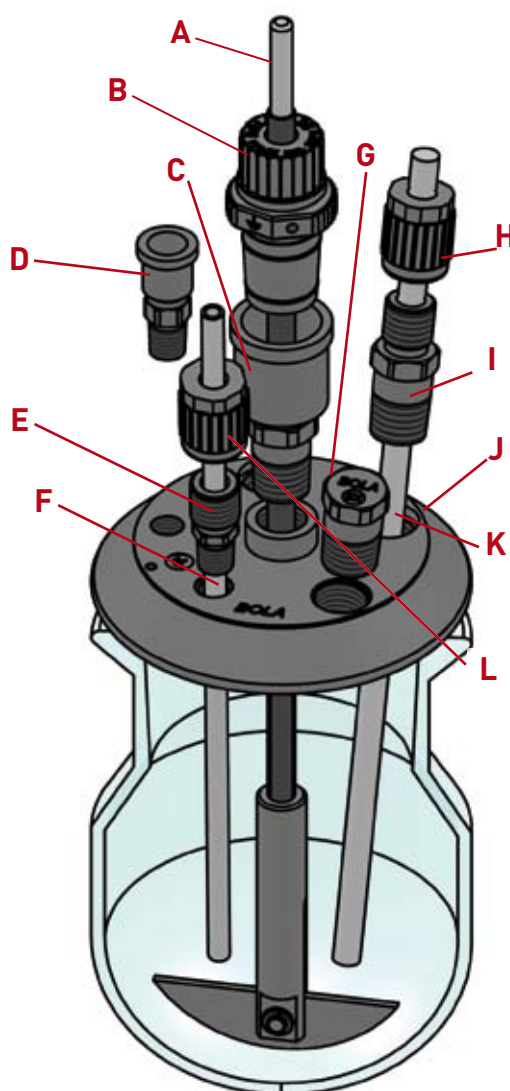


- G** Screw-in Stopper EX  
Cat. No.: B 173-04  
see page 136
- H** Laboratory Screw Joints EX  
Cat. No.: D 841-62  
see page 119
- I** Screw-in Connector EX  
Cat. No.: B 172-18  
see page 136
- J** Reactor Lid DN100 EX  
Cat. No.: B 170-16  
see page 133
- K** Temperature Probe Lemo Compact EX  
Cat. No.: P 1734-20  
see page 129
- L** Laboratory Screw Joint EX  
Cat. No.: D 841-62  
see page 119

## Thread connections in detail:

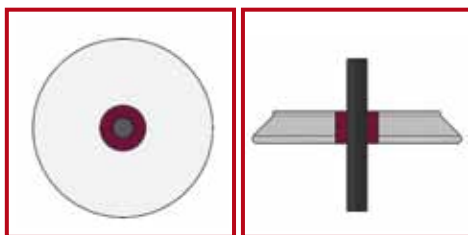


### Centric thread connection (purple):

For insertion of the stirrer bearing (see page 134).

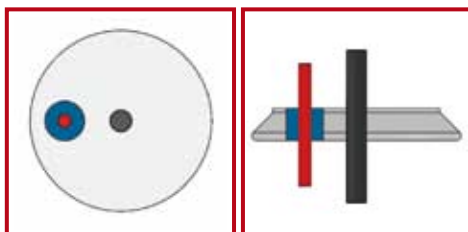


### Vertical thread connection with parallel alignment to the stirrer shaft (blue):

Components such as probes can be led into the reactor parallel to the stirrer shaft.

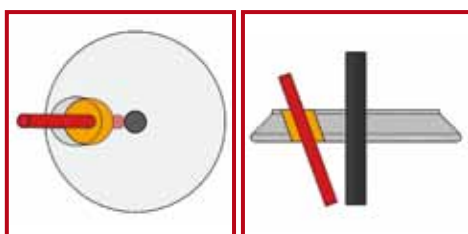

### Inclined thread connection with direction straight to the stirrer shaft (yellow):

Components such as tubes and tubing can be led directly to the stirrer shaft to achieve an optimal mixing of the medium.

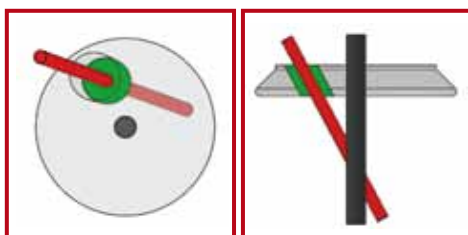

### Inclined thread connection with direction aside the shaft (green):

Collisions of long components such as temperature probes are avoided as they are led aside the stirrer shaft by means of this thread connection.

## BOLA Reactor Lid DN 60 EX

Material:	Temperature resistance:	Chemical resistance:	Conductivity:
PTFE-EX	from -200 °C to +250 °C	++ very good	10 <sup>6</sup> Ohm

### Product description:



Made of static dissipative PTFE-EX. Suitable for glass reactors DN 60 with SCHOTT flat flange. With screw-in threads for connection of transition fittings. Bore with female thread M5x6 for earthing connection on the upper side of the lid.

**NEW**

1 Connection	2 Connection	3 Connection	Cat. No.:
NPT 1/2" Connection directly to the shaft	NPT 1/2" Connection aside the shaft	NPT 1/2" Connection aside the shaft	B 170-04

### Applications:

For assembly of reactor lids using transition fittings made of static dissipative PTFE-EX from page 134 to 136.

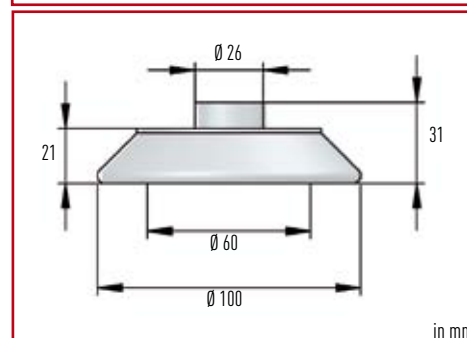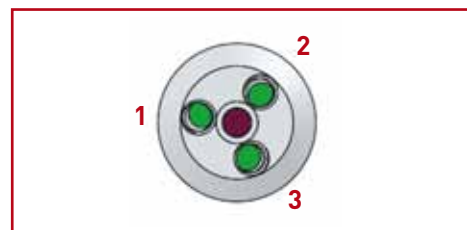

in mm

## BOLA Reactor Lid DN 100 EX

Material: <b>PTFE-EX</b>	Temperature resistance: <b>from -200 °C to +250 °C</b>	Chemical resistance: <b>++ very good</b>	Conductivity: <b>10<sup>6</sup> Ohm</b>
-----------------------------	---	---	--

Product description:

Made of static dissipative PTFE-EX. Suitable for glass reactors DN 100 with SCHOTT flat flange. With screw-in threads for connection of transition fittings. Bore with female thread M5x6 for earthing connection on the upper side of the lid.



**NEW**

1 Connection	2 Connection	3 Connection	4 Connection	5 Connection	Cat. No.:
NPT 1/2" Connection directly to the shaft	NPT 1/2" Connection aside the shaft	NPT 1/2" Connection directly to the shaft	NPT 1/4" Connection aside the shaft	NPT 1/4" vertical connection	<b>B 170-16</b>

**Applications:**

For assembly of reactor lids using transition fittings made of static dissipative PTFE-EX from page 134 to 136.

« Special Request? »  
+49 (0) 93 46-92 86-0

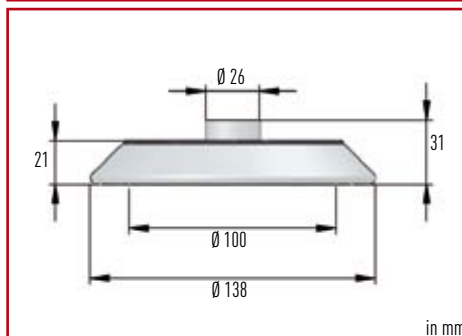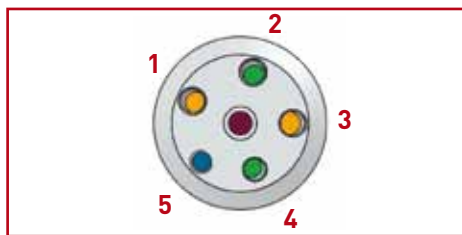

## BOLA Reactor Lid DN 150 EX

Material: <b>PTFE-EX</b>	Temperature resistance: <b>from -200 °C to +250 °C</b>	Chemical resistance: <b>++ very good</b>	Conductivity: <b>10<sup>6</sup> Ohm</b>
-----------------------------	---	---	--

Product description:


Made of static dissipative PTFE-EX. Suitable for glass reactors DN 150 with SCHOTT flat flange. With screw-in threads for connection of transition fittings. Bore with female thread M5x6 for earthing connection on the upper side of the lid.

**NEW**

1 Connection	2 Connection	3 Connection	4 Connection	5 Connection	Cat. No.:
NPT 1/2" Connection directly to the shaft	NPT 1/2" Connection aside the shaft	NPT 1/2" Connection directly to the shaft	NPT 3/4" Connection aside the shaft	NPT 1/4" vertical connection	<b>B 170-24</b>

**Applications:**

For assembly of reactor lids using transition fittings made of static dissipative PTFE-EX from page 134 to 136.

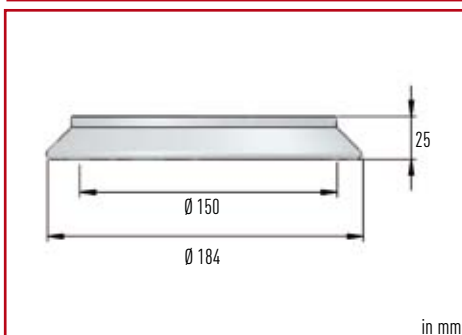

## BOLA Screw-In Connectors EX with Ground Joint

Material:	Temperature resistance:	Chemical resistance:	Conductivity:
PTFE-EX	from -200 °C to +250 °C	++ very good	10 <sup>6</sup> Ohm

Product description:

Made of static dissipative PTFE-EX. For connection to BOLA Reactor Lids. Connection with ground socket. With hexagonal gripping surface in standard wrench size. Earthing is made via a connection on the reactor lid.

**NEW**

Screw-In Thread NPT (male)	Ground socket NS	Wrench Size SW	Cat. No.:
1/4"	14/23	15	B 174-02
1/2"	29/32	24	B 174-06
1"	29/32	34	B 174-10

**Applications:**

For assembly on BOLA Reactor Lids made of PTFE-EX, Cat. No. B 170-... on page 132. For connection to existing components with ground joint such as Liebig Condensers, dropping funnels etc.



## BOLA Stirrer Bearings EX

Material:	Temperature resistance:	Chemical resistance:	Conductivity:
PTFE-EX	from -15 °C to +200 °C	++ very good	10 <sup>6</sup> Ohm

Product description:

Ground joint cone made of static dissipative PTFE-EX with sealing rings on the outside to prevent sticking of the connection and to reduce the danger of breaking glass. A special gasket made of PTFE-EX and an FPM o-ring which is compressed by GL screw cap provide a good sealing of the stirrer shaft. Bore with female thread M5 on the knurl for earth connection.

**NEW**

Cone NS <i>European standard</i>	For stirrer shaft dia. mm	Total length mm ca.	Thread of screw cap GL	Cat. No.:
29/32	8	71	18	C 423-08
29/32	10	72	25	C 423-10

**Applications:**

Perfect bearing for stainless steel, glass and BOLA stirrer shafts EX.



## BOLA Replacement Screw Caps EX

Material:	Temperature resistance:	Chemical resistance:	Conductivity:
PPS-EX	from -20 °C to +250 °C	++ very good	10 <sup>6</sup> Ohm

### Product description:

Screw cap with GL-thread made of PPS-EX. For sealing the stirrer shaft in BOLA Stirrer Bearings EX. Screw caps compress the o-ring of the special gasket and provide sealing of the stirrer shaft.

**NEW**

For stirrer shaft dia. mm	Thread GL			Cat. No.:
8	25			C 433-08
10	25			C 433-10

### Applications:

Spare part for BOLA Stirrer Bearings made of PTFE-EX (see Cat. No. C 423-... on page 134).



135

SCREW JOINTS / COMPONENTS FOR EX-PROTECTION



## BOLA offers custom manufacture.

Every lab is different. By offering an extensive range of established and sophisticated standard solutions we take into account the varied requirements of the respective branches and sectors.

But maybe you are looking for something special? Something that is not included in our standard product range?

In that case we are able to offer an individual custom manufacture. This is easier and faster than you may expect. Discuss your idea with our professionals. They will give advise and support during design. Finally, your idea will become real: We produce as per your requirements and in compliance with the chosen raw materials – already from 1 piece.

We only need a drawing (a sketch is sufficient) and some further information

### » You have a special request?

Give us a call: +49 (0) 93 46-92 86-0.

Hotline +49 (0) 93 46-92 86-0

## BOLA Special Gaskets EX

Material: <b>PTFE-EX</b>	Temperature resistance: <b>from -15 °C to +250 °C</b>	Chemical resistance: <b>++ very good</b>	Conductivity: <b>10<sup>6</sup> Ohm</b>
-----------------------------	--	---	--

Product description:

Sleeve made of PTFE-EX with o-ring made of FPM. For sealing the stirrer shaft in BOLA Stirrer Bearings EX.

**NEW**

For stirrer shaft dia. mm	Cat. No.:
8	<b>C 432-08</b>
10	<b>C 432-10</b>

**Applications:**

Spare part for BOLA Stirrer Bearings EX (see Cat. No. C 423-... on page 134).



## BOLA Screw-In Connectors GL EX

Material: <b>PTFE-EX</b>	Temperature resistance: <b>from -15 °C to +250 °C</b>	Chemical resistance: <b>++ very good</b>	Conductivity: <b>10<sup>6</sup> Ohm</b>
-----------------------------	--	---	--

Product description:

Made of PTFE-EX. For connection to BOLA Reactor Lids as GL necks. With hexagonal gripping surface in standard wrench size. Earthing is made via a connection on the reactor lid.

**NEW**

Screw-In Thread NPT (male)	Neck GL (male)	Wrench Size SW	Cat. No.:
1/4"	18	15	<b>B 172-16</b>
1/2"	18	22	<b>B 172-18</b>
1/2"	25	22	<b>B 172-20</b>

**Applications:**

For assembly on BOLA Reactor Lids made of PTFE-EX, Cat. No. B 170-... on page 132. For connection of hard-walled tubes, tubing and probes by means of BOLA Laboratory Screw Joints made of PTFE-EX.



## BOLA Screw-In Stoppers EX

Material: <b>PTFE-EX</b>	Temperature resistance: <b>from -15 °C to +250 °C</b>	Chemical resistance: <b>++ very good</b>	Conductivity: <b>10<sup>6</sup> Ohm</b>
-----------------------------	--	---	--

Product description:

Made of PTFE-EX. For connection to BOLA Reactor Lids. For closure of non-used connectors. With hexagonal gripping surface in standard wrench size. Earthing is made via a connection on the Reactor Lid.

**NEW**

Screw-In Thread NPT (male)	Wrench Size SW	Cat. No.:
1/4"	15	<b>B 173-02</b>
1/2"	22	<b>B 173-04</b>
3/4"	32	<b>B 173-06</b>
1"	45	<b>B 173-08</b>


**Applications:**

For assembly on BOLA Reactor Lids made of PTFE-EX, Cat. No. B 170-... on page 132.





## Screw Joints For Pressure up to 5 bar

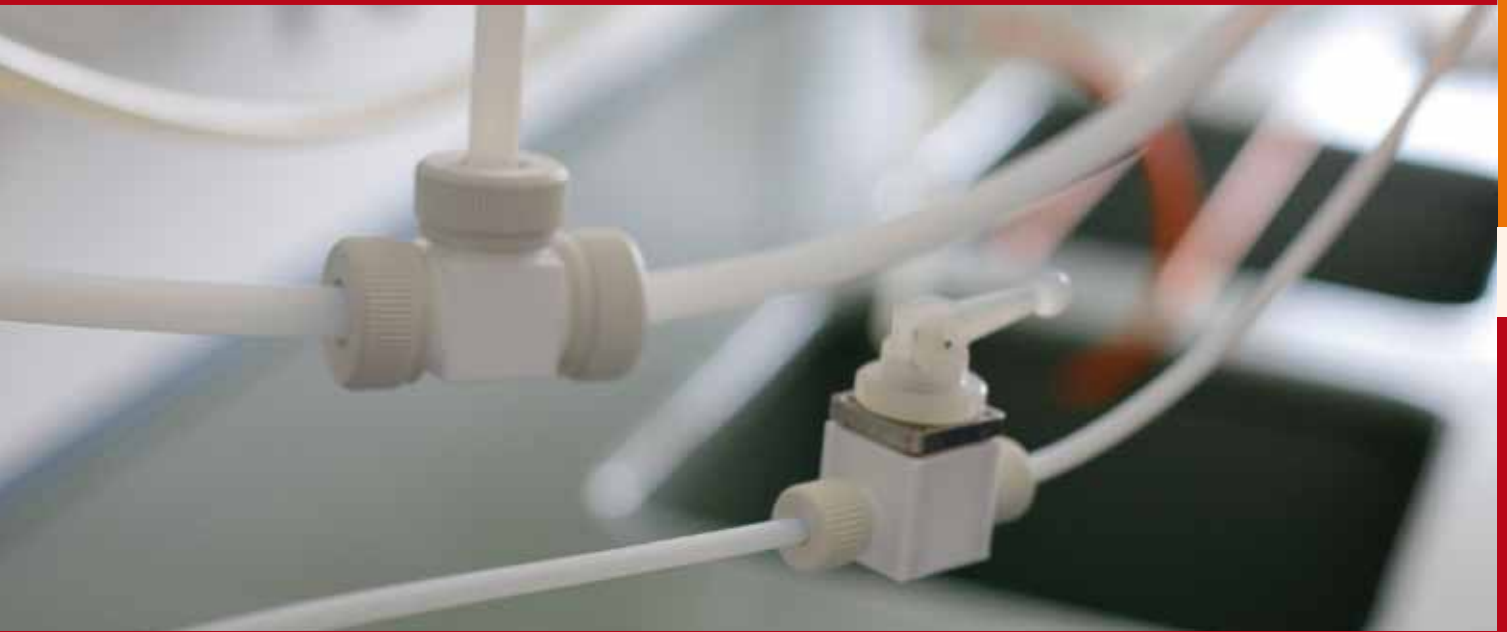

Joining things together: we have the ideal screw joints and connectors for almost all equipment and applications.

### PRODUCT TIPS



Page 138:  
Tube Fittings



Page 142:  
Stopcocks




Page 146:  
Tubing Connectors

## BOLA Screw Joints for Pressures up to 5 Bar

### Components:

- A** Threaded neck of fitting
- B** Tapered ring
- C** V-ring
- D** Nut
- E** Tubing or tube

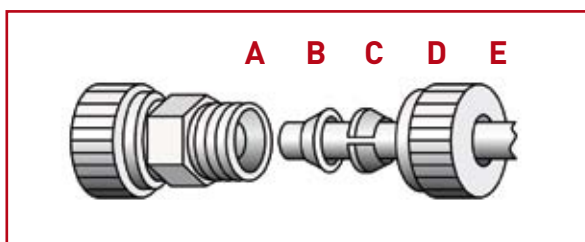


### Assembly:

1. Push the nut on the tubing/tube
2. Push V-ring and then the tapered ring on the tubing/tube
3. Tighten the nut on the threaded neck – ready

### What you should know about the screw joint system up to 5 bar

This economic screw joint system was developed especially for tubing made of PTFE, PFA or FEP, but it can also be used with tubes made of glass or steel. Its function is based on compression rings which provide a pressure resistance of up to 5 bar at room temperature. All parts which are exposed to the medium are made of PTFE. Only the nut which is not in contact with the medium is made of glass-fibre reinforced PTFE for better stability. The fittings and nuts have metric threads.

All components of this system have a universal chemical resistance, since the product is only exposed to PTFE.

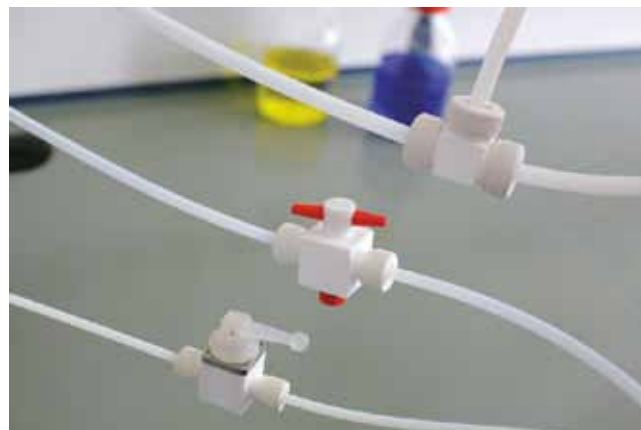

### BOLA Tube Fittings

**BESTSELLER**

Material:	Temperature resistance:	Chemical resistance:	Pressure:	Vacuum:
PTFE	from -200°C to +250°C	+++ universal	5 bar	suitable

#### Product description:

Straight tube fitting made of PTFE with nuts made of glass-fibre reinforced PTFE. Universal chemical resistance, the product is only exposed to PTFE.

FDA conform

Thread of fitting M	Bore dia. mm	Total length mm	For tubing O.D. mm	Cat. No.:
14 x 2	6	49	4	D 503-02
14 x 2	6	49	6	D 503-04
14 x 2	6	49	(1/4") 6,35	D 503-06
18 x 2	8	54	8	D 503-08
18 x 2	8	54	10	D 503-12
28 x 2	14	58	12	D 503-14
28 x 2	14	58	14	D 503-16
28 x 2	14	58	16	D 503-18



## BOLA Tube Fittings T

Material: PTFE Temperature resistance: from -200°C to +250°C Chemical resistance: +++ universal Pressure: 5 bar Vacuum: suitable

Product description:

Tube fitting T-shaped made of PTFE, three connections with nuts made of glass-fibre reinforced PTFE. Universal chemical resistance, the product is only exposed to PTFE.

FDA conform

Thread of fitting M	Bore dia. mm	Dimensions (L x H) mm	For tubing O.D. mm	Cat. No.:
14 x 2	4	56 x 39	4	D 505-02
14 x 2	4	56 x 39	6	D 505-04
14 x 2	4	56 x 39	(1/4") 6,35	D 505-06
18 x 2	8	60 x 43	8	D 505-08
18 x 2	8	60 x 43	10	D 505-12
28 x 2	14	71 x 54	12	D 505-14
28 x 2	14	71 x 54	14	D 505-16
28 x 2	14	71 x 54	16	D 505-18



SUITABLE: page 149  
Tubing for all fittings

## BOLA Tube Fittings Elbow

Material: PTFE Temperature resistance: from -200°C to +250°C Chemical resistance: +++ universal Pressure: 5 bar Vacuum: suitable

Product description:

Tube fitting elbow-shaped made of PTFE, two connections with nuts made of glass-fibre reinforced PTFE. Universal chemical resistance, the product is only exposed to PTFE.

FDA conform

Thread of fitting M	Bore dia. mm	Dimensions (L x H) mm	For tubing O.D. mm	Cat. No.:
14 x 2	4	39 x 39	4	D 504-02
14 x 2	4	39 x 39	6	D 504-04
18 x 2	8	43 x 43	8	D 504-08
18 x 2	8	43 x 43	10	D 504-12
28 x 2	14	54 x 54	12	D 504-14
28 x 2	14	54 x 54	14	D 504-16
28 x 2	14	54 x 54	16	D 504-18



### BOLA Practical Tip

Uwe Hossfeld » application engineering

#### Protection from buckling

If you want to avoid buckling of your tubing, simply cut it and add an elbow fitting for connection.

## BOLA Reducing Unions


Material: PTFE    Temperature resistance: from -200°C to +250°C    Chemical resistance: +++ universal    Pressure: 5 bar    Vacuum: suitable

Product description:

Straight tube fitting made of PTFE with nuts made of glass-fibre reinforced PTFE. For connecting tubing or tube with different outer diameters. Universal chemical resistance, the product is only exposed to PTFE.

FDA conform

A Thread of fitting M	For tubing O.D. mm	Bore dia. mm	B Thread of fitting M	For tubing O.D. mm	Cat. No.:
14 x 2	6	6	14 x 2	4	D 526-02
18 x 2	8	6	14 x 2	4	D 526-04
18 x 2	8	6	14 x 2	6	D 526-10
18 x 2	10	6	14 x 2	4	D 526-06
18 x 2	10	6	14 x 2	6	D 526-12
18 x 2	10	8	18 x 2	8	D 526-14
28 x 2	12	6	14 x 2	4	D 526-26
28 x 2	12	6	14 x 2	6	D 526-32
28 x 2	12	10	18 x 2	8	D 526-38
28 x 2	12	10	18 x 2	10	D 526-18
28 x 2	14	6	14 x 2	4	D 526-28
28 x 2	14	6	14 x 2	6	D 526-34
28 x 2	14	10	18 x 2	10	D 526-20
28 x 2	16	6	14 x 2	4	D 526-30
28 x 2	16	6	14 x 2	6	D 526-36
28 x 2	16	10	18 x 2	10	D 526-22

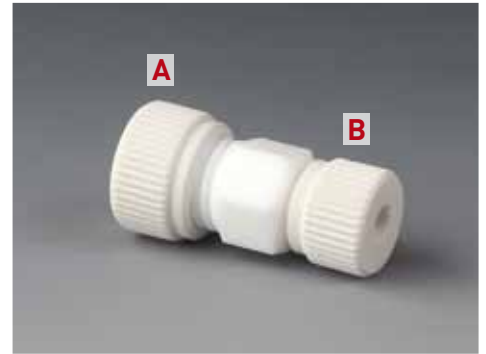

## BOLA Distributors


Material: PTFE    Temperature resistance: from -200°C to +250°C    Chemical resistance: +++ universal    Pressure: 5 bar    Vacuum: suitable

Product description:

Body made of PTFE with nuts made of glass-fibre reinforced PTFE. One inlet and three or four outlets, bore diameter 6 mm. Universal chemical resistance, the product is only exposed to PTFE.

FDA conform

Thread of fitting M	Inlets A	For tubing O.D. mm	Outlets B	For tubing O.D. mm	Dimensions L x W x H mm	Cat. No.:
14 x 2	1	4	3	4	100 x 22 x 96	D 512-01
14 x 2	1	6	3	6	100 x 22 x 96	D 512-02
14 x 2	1	4	4	4	140 x 22 x 96	D 512-08
14 x 2	1	6	4	6	140 x 22 x 96	D 512-09

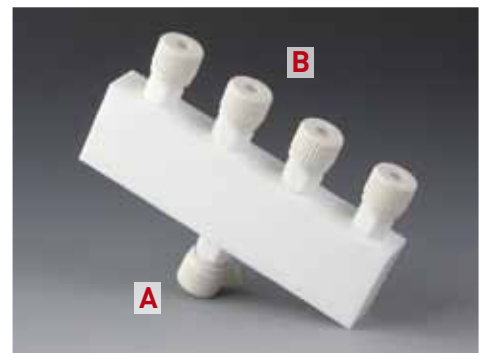

## BOLA Screw-in Tube Fittings

Material: PTFE  
 Temperature resistance: from -200°C to +250°C  
 Chemical resistance: +++ universal  
 Pressure: 5 bar  
 Vacuum: suitable

Product description:

Straight tube fitting made of PTFE with nuts made of glass-fibre reinforced PTFE and a screw-in thread (either NPT or G). Universal chemical resistance, the product is only exposed to PTFE.

FDA conform

A Thread of fitting M	For tubing O.D mm	Bore dia. mm	B Screw- in thread	Total length mm	Cat. No.:
14 x 2	4	4	NPT 1/8"	38	D 518-02
14 x 2	4	4	G 1/8"	38	D 518-04
14 x 2	4	4	NPT 1/4"	40	D 518-06
14 x 2	4	4	G 1/4"	38	D 518-08
14 x 2	6	4	NPT 1/4"	40	D 518-12
14 x 2	6	4	G 1/4"	38	D 518-14
14 x 2	6	4	NPT 3/8"	46	D 518-16
14 x 2	6	4	G 3/8"	46	D 518-18
18 x 2	8	8	NPT 1/4"	46	D 518-24
18 x 2	8	8	G 1/4"	46	D 518-26
18 x 2	8	8	NPT 3/8"	46	D 518-28
18 x 2	8	8	G 3/8"	46	D 518-30
18 x 2	10	8	NPT 1/4"	46	D 518-36
18 x 2	10	8	G 1/4"	46	D 518-38
18 x 2	10	8	NPT 3/8"	46	D 518-40
18 x 2	10	8	G 3/8"	46	D 518-42
28 x 2	12	12	NPT 3/8"	56	D 518-48
28 x 2	12	12	G 3/8"	56	D 518-50
28 x 2	12	12	NPT 1/2"	56	D 518-52
28 x 2	12	12	G 1/2"	56	D 518-54
28 x 2	14	12	NPT 1/2"	56	D 518-60
28 x 2	14	12	G 1/2"	56	D 518-62
28 x 2	16	12	NPT 1/2"	56	D 518-68
28 x 2	16	12	G 1/2"	56	D 518-70



141

SCREW JOINTS FOR PRESSURE UP TO 5 BAR

**BOLA Practical Tip**  
 Marion Hammerich » construction

**You don't know which thread type and size you have in your hands?**

Our scale thread illustrations help to make an optical comparison.

see page 294



**SUITABLE:** page 149  
 Tubing for all fittings

## BOLA (2-Way/3-Way) Stopcocks

Material:	Temperature resistance:	Chemical resistance:	Pressure:
PTFE	from -0°C to +110°C	+++ universal	2 bar

Product description:


2-way stopcock with straight bore and two connections or 3-way stopcock with T-shaped bore and three connections, with nuts made of glass-fibre reinforced PTFE for connecting tubing or tube. Conical stopcock plug, tightness is increased by turning the nut on the lower side. 3-way stopcock plug with T-shaped mark of flow direction. Universal chemical resistance, the flowing product is only exposed to PTFE.

FDA conform

Typ	Bore shape stopcock	Bore dia. mm	For tubing O. D. mm	Thread M	Outer dimensions L x D x H mm	Cat. No.:
<b>A</b> 2-Way	—	2	4	14 x 2	59 x 22 x 53	E 652-02
2-Way	—	2	6	14 x 2	59 x 22 x 53	E 652-04
2-Way	—	5	8	18 x 2	74 x 35 x 69	E 652-06
2-Way	—	5	10	18 x 2	74 x 35 x 69	E 652-08
<b>B</b> 3-Way	T	1,5	4	14 x 2	59 x 41 x 53	E 654-02
3-Way	T	1,5	6	14 x 2	59 x 41 x 53	E 654-04
3-Way	T	3,5	8	18 x 2	74 x 54 x 69	E 654-06
3-Way	T	3,5	10	18 x 2	74 x 54 x 69	E 654-08

Applications:

For distributing liquids or gases. Quick and easy disconnection of flow.

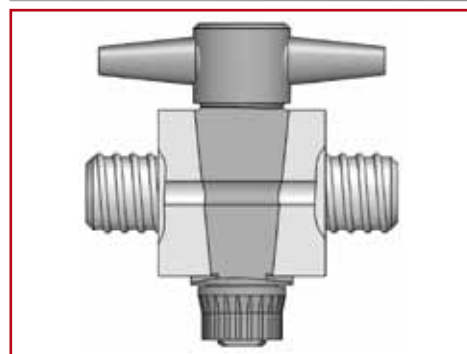

## BOLA Control Valves

Material:	Temperature resistance:	Chemical resistance:	Pressure:
PTFE, PP	from -0°C to +110°C	+++ universal	6 bar


Product description:

Body made of PTFE with 2 connections and nuts made of glass-fibre reinforced PTFE for connecting tubing or tube. Bore dia. 6 mm. Motionless sealing by means of a gastight bellows made of PTFE with flat cone point. No leakages.

FDA conform

- » volume flow can be regulated manually (without regulation scale).
- » suitable for panel mounting
- » easy disassembly for cleaning
- » universal chemical resistance, the flowing product is only exposed to PTFE

Thread of fitting M	For tubing O. D. mm	Outer dimensions L x D x H mm	Cat. No.:
18 x 2	8	85 x 44 x 84	E 672-54
18 x 2	10	85 x 44 x 84	E 672-56

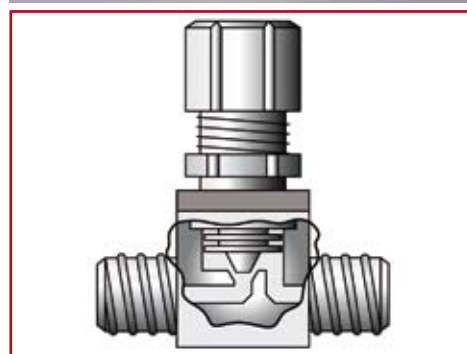

## BOLA Snap Valves

Material: <b>PTFE, PP</b>	Temperature resistance: <b>from -0°C to +110°C</b>	Chemical resistance: <b>+++ universal</b>	Pressure: <b>6 bar</b>	Vacuum: <b>suitable</b>
------------------------------	---	--	---------------------------	----------------------------

### Product description:


Body made of PTFE with 2 connections and nuts made of glass-fibre reinforced PTFE for connecting tubing or tube. Bore dia. 6 mm. Motionless sealing by means of a gastight bellow made of PTFE with flat cone point. No leakages.

Lever locks when valve is open, switch setting is easily visible at position of the lever.

FDA conform

- » suitable for panel mounting
- » easy disassembly for cleaning
- » universal chemical resistance, the flowing product is only exposed to PTFE

Thread of fitting M	For tubing O.D. mm	Outer dimensions L x D x H mm	Cat. No.:
18 x 2	8	85 x 44 x 90	E 674-54
18 x 2	10	85 x 44 x 90	E 674-56

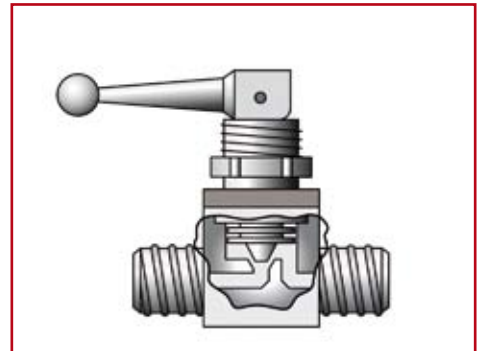

## BOLA Non-Return Valves


Material: <b>PTFE</b>	Temperature resistance: <b>from -200°C to +250°C</b>	Chemical resistance: <b>+++ universal</b>
--------------------------	---	--

### Product description:

Made of PTFE, with nuts made of glass-fibre reinforced PTFE for connecting tubing or tube. Opening pressure adjustable between 0,1 bar and 2 bar (factory setting 0,1 bar). The built-in lock function only allows flow in one direction, the flow direction is marked by an arrow, any fitting position is possible. All parts are easy to disassemble by hand for cleaning. Universal chemical resistance, the flowing product is only exposed to PTFE or PFA.

FDA conform

Thread of fitting M	For tubing O.D. mm	Total length mm	O.D. mm	Cat. No.:
14 x 2	4	110	38	E 680-21
14 x 2	6	110	38	E 680-23
18 x 2	8	110	38	E 680-27
18 x 2	10	110	38	E 680-31
28 x 2	12	140	54	E 680-33

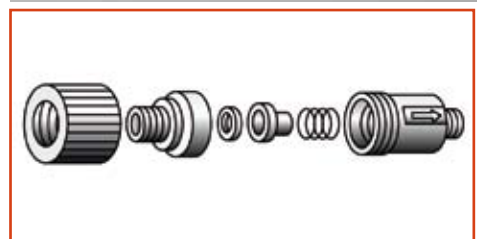

SUITABLE: page 149  
Tubing for all fittings

## BOLA Ground Joint Tube Fittings

Material: PTFE	Temperature resistance: from -200°C to +250°C	Chemical resistance: +++ universal	Vacuum: suitable
-------------------	--	---------------------------------------	---------------------

Product description:

Fitting made of PTFE for transition from ground joints to metric threads for connecting hard-walled tubing (e.g. PTFE, PFA or FEP). With nuts made of glass-fibre reinforced PTFE, body with rings and knurled grip for opening. The product is only exposed to PTFE.

FDA conform

Ground joint NS	For tubing O.D. mm	Thread of fitting M	Bore dia. mm	Cat. No.:
14/23	6	14 x 2	5,0	H 1001-04
19/26	6	14 x 2	5,0	H 1001-06
29/32	6	14 x 2	5,0	H 1001-10
29/32	8	18 x 2	8,5	H 1001-12
29/32	10	18 x 2	8,5	H 1001-14

Applications:

For connecting tubes or tubing to vessels with ground joint. For inserting and fixing probes, thermometers, dip tubes or cables.



## BOLA Replacement Nuts

Material: PTFE	Temperature resistance: from -200°C to +250°C
-------------------	--

Product description:

Made of glass-fibre reinforced PTFE. For fittings, valves and stopcocks.

FDA conform

Thread of fitting M	For tubing O.D. mm	Cat. No.:
14 x 2	4 - 6,35	D 501-01
18 x 2	8 - 10,0	D 501-04
28 x 2	12 - 16,0	D 501-07



## BOLA Replacement Compression Rings

Material: PTFE	Temperature resistance: from -200°C to +250°C
-------------------	--

Product description:

Made of PTFE, two-part set with one tapered ring and one v-ring.

FDA conform

Thread of fitting M	For tubing O.D. mm	Cat. No.:
14 x 2	4	D 502-01
14 x 2	6	D 502-02
14 x 2	{1/4"} 6,35	D 502-03
18 x 2	8	D 502-04
18 x 2	{3/8"} 9,52	D 502-05
18 x 2	10	D 502-06
28 x 2	12	D 502-07
28 x 2	{1/2"} 12,7	D 502-51
28 x 2	14	D 502-08
28 x 2	16	D 502-09





## BOLA BOLA Plugs

Material: PTFE Temperature resistance: from -200°C to +250°C Chemical resistance: +++ universal Pressure: 5 bar Vacuum: suitable

Product description:

Made of PTFE, for closing unused fitting connections (a suitable glass-fibre reinforced PTFE nut has to be ordered separately (Cat. No. D 501-.. see page 144).

FDA conform

Connection for O.D. mm	Cat. No.:
4 / 6 / (1/4") 6,35	D 648-02
8 / (3/8") 9,52 / 10	D 648-08
12 / (1/2") 12,7 / 14 / 16	D 648-14



## BOLA Stopcocks with Hose Connectors

Material: PTFE, PP Temperature resistance: from -0°C to +110°C Chemical resistance: +++ universal Pressure: 2 bar

Product description:

2-way stopcock with straight bore and two hose connectors or 3-way stopcock with T-shaped bore and three hose connectors for connecting elastic tubing (e.g. Viton®, Tygon®, silicone). Conical stopcock plug, tightness is increased by turning the nut on the lower side. 3-way stopcock plug with T-shaped mark of flow direction. Universal chemical resistance, the flowing product is only exposed to PTFE.

FDA conform

Type	Bore shape stopcock	Bore dia. mm	For tubing I. D. mm	O.D. of hose connectors mm	Outer dimensions L x D x H mm	Cat. No.:
A	2-Way	1,5	4	4,5	60 x 22 x 53	E 650-03
	2-Way	3,0	6	6,8	60 x 22 x 53	E 650-06
	2-Way	4,0	8	9,0	60 x 22 x 53	E 650-09
	2-Way	6,0	10	11,0	85 x 35 x 69	E 650-12
B	3-Way	T	1,0	4,5	60 x 41 x 53	E 650-50
	3-Way	T	2,0	6,8	60 x 41 x 53	E 650-53
	3-Way	T	3,0	9,0	60 x 41 x 53	E 650-56
	3-Way	T	4,0	11,0	85 x 60 x 69	E 650-59

Applications:

For distributing liquids or gases. Quick and easy disconnection of flow.



## BOLA Tubing Connectors

Material: <b>PTFE</b>	Temperature resistance: <b>from -200°C to +250°C</b>	Chemical resistance: <b>+++ universal</b>	Vacuum: <b>suitable</b>
--------------------------	---	--	----------------------------

Product description:

Straight fitting made of PTFE with two connectors for elastic tubing (e.g. Viton<sup>®</sup>, Tygon<sup>®</sup>, silicone). Universal chemical resistance, the product is only exposed to PTFE.

FDA conform

Total length mm	Bore dia. mm	O.D. of connectors mm	Cat. No.:
45	2	4,5	<b>D 575-02</b>
53	3	6,8	<b>D 575-04</b>
61	5	9,0	<b>D 575-06</b>
69	6	11,0	<b>D 575-08</b>



## BOLA Tubing Connectors T

Material: <b>PTFE</b>	Temperature resistance: <b>from -200°C to +250°C</b>	Chemical resistance: <b>+++ universal</b>	Vacuum: <b>suitable</b>
--------------------------	---	--	----------------------------

Product description:

T-shaped fitting made of PTFE with three connectors for elastic tubing (e.g. Viton<sup>®</sup>, Tygon<sup>®</sup>, silicone). Universal chemical resistance, the product is only exposed to PTFE.

FDA conform

Total length mm	Bore dia. mm	O.D. of connectors mm	Cat. No.:
19,5	2	4,5	<b>D 577-02</b>
22,5	3	6,8	<b>D 577-04</b>
25,5	5	9,0	<b>D 577-06</b>
28,5	6	11,0	<b>D 577-08</b>



## BOLA Tubing Connectors Elbow

Material: <b>PTFE</b>	Temperature resistance: <b>from -200°C to +250°C</b>	Chemical resistance: <b>+++ universal</b>	Vacuum: <b>suitable</b>
--------------------------	---	--	----------------------------

Product description:

Elbow-shaped fitting made of PTFE with two connectors for elastic tubing (e.g. Viton<sup>®</sup>, Tygon<sup>®</sup>, silicone). Universal chemical resistance, the product is only exposed to PTFE.

FDA conform

Total length mm	Bore dia. mm	O.D. of connectors mm	Cat. No.:
19,5	2	4,5	<b>D 574-02</b>
22,5	3	6,8	<b>D 574-04</b>
25,5	5	9,0	<b>D 574-06</b>
28,5	6	11,0	<b>D 574-08</b>



« »  
Special Request?  
+49 (0) 93 46-92 86-0

## BOLA Tubing Connectors Cross

Material:	Temperature resistance:	Chemical resistance:	Vacuum:
PTFE	from -200°C to +250°C	+++ universal	suitable

Product description:

Cross-shaped fitting made of PTFE with four connectors for elastic tubing (e.g. Viton®, Tygon®, silicone). Universal chemical resistance, the product is only exposed to PTFE.

FDA conform

Total length mm	Bore dia. mm	O.D. of connectors mm	Cat. No.:
28,5	6	11,0	D 573-08



## BOLA Tubing Connectors Y

Material:	Temperature resistance:	Chemical resistance:	Vacuum:
PTFE	from -200°C to +250°C	+++ universal	suitable

Product description:

Y-shaped fitting made of PTFE with three connectors for elastic tubing (e.g. Viton®, Tygon®, silicone). Universal chemical resistance, the product is only exposed to PTFE.

FDA conform

Total length mm	Bore dia. mm	O.D. of connectors mm	Cat. No.:
40	2	4,5	D 576-02
47	3	6,8	D 576-04
53	5	9,0	D 576-06
60	6	11,0	D 576-08



## BOLA Reducing Tubing Connectors

Material:	Temperature resistance:	Chemical resistance:	Vacuum:
PTFE	from -200°C to +250°C	+++ universal	suitable

Product description:

Straight fitting made of PTFE with two connectors for elastic tubing (e.g. Viton®, Tygon®, silicone) with different inner diameters. Universal chemical resistance, the product is only exposed to PTFE.

FDA conform

Total length mm	Bore dia. mm	From O.D. of connector mm	To O.D. of connector mm	Cat. No.:
45	2	6,8	4,5	D 572-02
55	3	9,0	6,8	D 572-04
75	5	11,0	9,0	D 572-06



## BOLA Screw-In Tubing Connectors

Material: <b>PTFE</b>	Temperature resistance: <b>from -200°C to +250°C</b>	Chemical resistance: <b>+++ universal</b>	Vacuum: <b>suitable</b>
--------------------------	---	--	----------------------------

### Product description:

Straight fitting made of PTFE with one connector for elastic tubing (e.g. Viton<sup>®</sup>, Tygon<sup>®</sup>, silicone) and one screw-in thread (either NPT or G).  
Universal chemical resistance, the product is only exposed to PTFE.


FDA conform

Total length mm	Bore dia. mm	O.D. of connector mm	Thread		Wrench size mm	Cat. No.:
			NPT	G		
20	2,5	4,5	1/8"		14	D 579-02
22	5,0	6,8	1/4"		15	D 579-04
22	5,8	9,0	1/4"		15	D 579-06
22	4,0	6,8		1/4"	15	D 579-22
22	5,0	9,0		1/4"	15	D 579-24
25	8,0	11,0		3/8"	18	D 579-26



148

SCREW JOINTS FOR PRESSURE UP TO 5 BAR

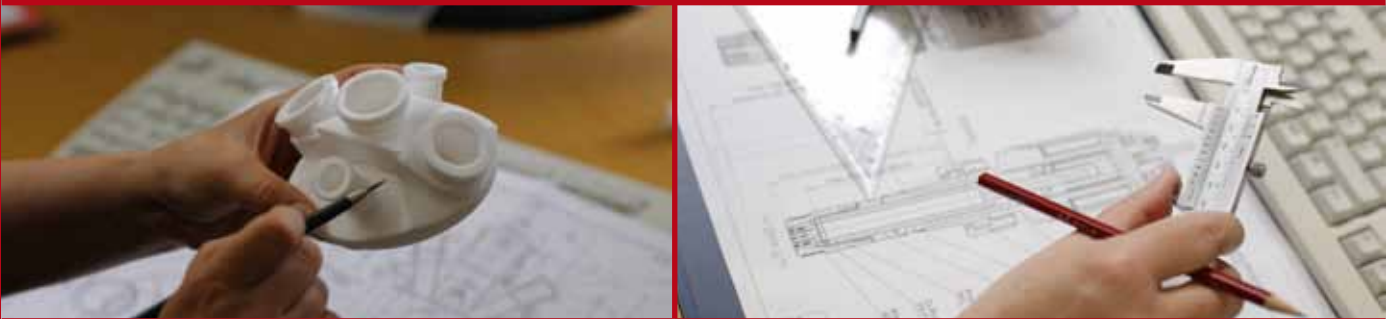

## BOLA offers custom manufacture.

Every lab is different. By offering an extensive range of established and sophisticated standard solutions we take into account the varied requirements of the respective branches and sectors.

But maybe you are looking for something special? Something that is not included in our standard product range?

In that case we are able to offer an individual custom manufacture. This is easier and faster than you may expect. Discuss your idea with our professionals. They will give advise and support during design. Finally, your idea will become real: We produce as per your requirements and in compliance with the chosen raw materials – already from 1 piece.

We only need a drawing (a sketch is sufficient) and some further information

### » You have a special request?

Give us a call: +49 (0) 93 46-92 86-0.

## Tubing » Films » Tiles



149

TUBING » FILMS » TILES

Totally practice-oriented: BOLA Tubing, Films and Tiles meet the highest demands and are used in more and more laboratories.

### PRODUCT TIPS



Page 155:  
PTFE Tubing



Page 154:  
Flexible Tubing

## BOLA Tubing



### BOLA Tubing offers many advantages:

» **Short minimum lengths**

Depending on the tubing dimensions – for details please look at our price-list. Minimum lengths are unfortunately necessary for granting a low price per metre.

» **No specification of fixed rolls – available per metre**

Free choice of requested length between minimum length and maximum production length.

» **Longer lengths in one piece possible**

For tubing up to O.D. 10 mm, quantities of up to 100 metres in one length are possible without extra charge; quantities of more than 100 metres in one length are only available in particular cases – please ask us.

» **Whenever possible, your ordered quantity is supplied in one length**

If our inventory or the ordered quantity does not allow another possibility, the tubing is supplied in partial lengths without consultation. Example: 90 m = 60 m + 30 m

» **Good to handle**

Tubing up to an O.D. of 3 mm and with a minimum length of 30 m is supplied on reels. This prevents bends and twists and makes storage and rolling up easier.

» **Tailored rolls/reels are available**

Several rolls with the same lengths are available at low extra charges, e.g. 5 rolls of 40 metres or 11 rolls of 22 metres.

» **Excellent quality at fair prices**

Stricter tolerances than the general industrial standard GKV – perfect interaction with our BOLA Fittings and BOLA Stopcocks.

### Tolerances of BOLA Tubing – You can count on them.

BOLA Tubing is perfectly suitable for the use with all BOLA Screw Joint Systems. You can be sure that all fittings and screw joints fit together with the tubing. The production of tubing always involves certain tolerances in outer diameter and wall thickness.

We always check our tubing repeatedly on the basis of strict BOLA-internal standards. These standards are stricter than the standards which are currently in the market.

Nominal O.D.

from 0,4 mm to 3,2 mm

» tolerance of O.D. +/- 0,05 mm

over 3,3 mm to 10,0 mm

» tolerance of O.D. +/- 0,10 mm

over 10,1 mm to 16,0 mm

» tolerance of O.D. +/- 0,15 mm

over 16,1 mm to 22,0 mm


» tolerance of O.D. +/- 0,20 mm

over 22,1 mm

» tolerance of O.D. +/- 0,25 mm



**HELPFUL:** page 287  
Detailed information about  
tubing tolerances

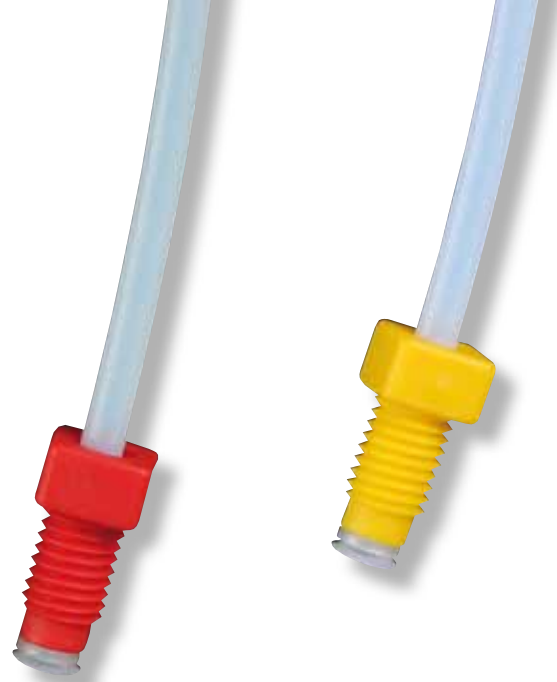

**What you should know about the choice of tubing**

Incorrectly chosen tubing can endanger the user. Here you can find the most important features in tabular form. The number of "+"-signs stands for the degree of performance of the feature.

Tubing material	PTFE	PFA	FEP
Maximum temperature <small>(at moderate charge)</small>	+260°C	+260°C	+205°C
Minimum temperature <small>(at moderate charge)</small>	-200°C	-270°C	-270°C
Chemical resistance	+++	+++	++(+)
Transparency	+	++(+)	+++
Surface quality	++	+++	+++
Gas proofness <small>(in limit range)</small>	++	+++	+++
Recovery	+	++	++
Costs	+	+++	++

Our tip: PTFE tubing is ideal for the "normal" work in laboratories.

If you need tubing which is absolutely gastight even in limit range of pressure and temperature, you should choose PFA or FEP. PFA only has advantages at temperatures of more than +205°C, but is more expensive than FEP tubing.

**We shape and bend ... according to your needs.**

FEP and PFA tubing is most suitable for shaping or bending. A special thermal procedure is applied to shape the tubing to the requested form. Please contact us for a free and non-binding quotation.

**We connect and assemble ... according to your needs.**

We can offer you our "know how" for cutting tubing, assembling fittings (either from our standard range or suitable for your specific system) from single pieces to complete series manufacturing. Please contact us for a free quotation.

**Typical range of applications for tubing made of fluoroplastics (PTFE, PFA, FEP)**

- » For transport of aggressive products such as acids, lyes, gases and solvents
- » For analysis- or measuring devices of chromatography and laboratory
- » As product lines in miniplant systems
- » As dosing lines for reaction vessels
- » In liquid chromatography; high-purity tubing without additives (e.g. softeners) which could destroy analysis
- » As covering of mechanically operated parts, e.g. bowden wires (due to the low coefficient of friction)
- » As covering of sensors in chemical plants
- » For transport of lacquers, oils, resins and food products
- » As covering of heating elements in galvanic stations and microelectronics
- » Antistatic tubing in explosive applications

## BOLA Tubing



### Frequently asked questions about customized tubing

» **Which tubing dimensions are available?**

We can supply tubing with outer diameters between 0,4 mm and 40 mm and wall thicknesses between 0,1 mm and 4 mm.

» **What if I only need a small quantity of customized tubing?**

Small quantities can be supplied but only at higher cost as a minimum order quantity has to be purchased. Unfortunately it is not possible to indicate exact minimum lengths. In general: the smaller the outer diameter, the bigger the minimum quantity and the smaller the price per metre. Please send us your actual requirement. We will then provide you with the corresponding minimum quantity and price.

» **Which tubing materials do you offer?**

We offer tubing made of fluoroplastics such as PTFE, PTFE-EX, FEP and PFA. Additionally, we supply tubing made of PEEK.

» **What shall I do if I am not sure if the requested tubing is producible?**

Normally we know this and can inform you quickly.

» **Do you have screw joint systems for every diameter of tubing?**

We offer a wide range of screw joints. A screw joint system to your requirements might already exist. If not, custom screw joints can be offered and supplied. Please contact us.

» **How do close tolerances affect the price of tubing?**

In general, close tolerances increase the price for production because expenses for checking the tubing are higher and there can be more waste of tubing which does not fulfil these close tolerances. It can even occur that a production is not possible if the tolerances are too close – in this case we will contact you to find a solution.

» **What is the lead time for tubing?**

The lead time depends on many factors such as dimension, quantity, material, tolerances and running length. The typical lead time for customized tubing is between 3 and 6 weeks.

» **How do I get a quotation?**

Send us your enquiry by fax or e-mail stating all relevant dimensions such as diameter, length, etc. We will do our utmost to get our offer to you as soon as possible. Please do not forget to indicate the required quantity. It is also important to include in your enquiry whether the requested tubing is a one-time or a repeating need.





### Cleaning and reuse of tubing

In general, cleaned fluoroplastic tubing should only be reused if the transported product is known and rated with “+” in the chemical resistance chart (page 279).

It is not recommended to reuse the tubing with unknown products and mixtures of chemicals. For all water-soluble substances (e.g. salts, acids, bases etc) you can use water as cleaning agent.

Volatile solvents such as alcohols, esters, ketones, low-boiling hydrocarbons, chlorinated hydrocarbons are given off reversibly by storing under aeration (only if they have not been absorbed by the interior surface of the tubing).

If you are using substances which can only be eliminated by organic solvents or if you are using toxic and dangerous products, the tubing should be disposed appropriately after use. A visual inspection or, in case of unclarity an inspection according to EN 12115, has to be made before reusing cleaned tubing.

### You haven't found anything suitable? – No problem

**We would be glad to send you a quotation. For quick processing, we need some information:**

- » Outer diameter in mm (e.g. 16 mm)
- » Inner diameter in mm (e.g. 12 mm)
- » Which quantity in one length do you need?
- » Which total quantity do you need?
- » Which material shall be used?

### Further information – not obligatory, but often making sense.

- » Do you need special tolerances for outer or inner diameter (e.g.  $\varnothing$  10 mm +/- 0,1 mm; this means tubing can vary between 9,9 mm and 10,1 mm)?
- » Shall the tubing be deformable, for example for making flanges?
- » Up to which temperature will the tubing be used?
- » Which pressure shall the tubing resist?
- » Shall the tubing be electroconductive?
- » Shall the tubing be transparent?
- » Shall the tubing have a special surface quality?
- » Do you need certificates? (e.g. test certificates, certificates of compliance or FDA certificates)
- » To which pressure or vacuum at which temperatures is the tubing exposed?
- » Do you need special packaging?
- » Shall the tubing be dyed with a colour? Which colour do you request?
- » Do you need an exceptionally tight bending radius?
- » Does the tubing have to be absolutely gastight?

## BOLA Flexible Tubing

**BESTSELLER**

Material: <b>PFA</b>	Temperature resistance: <b>from -200°C to +260°C</b>	Chemical resistance: <b>+++ universal</b>	Transparency: <b>transparent</b>	Vacuum: <b>suitable</b>
-------------------------	---	--	-------------------------------------	----------------------------



### Product description:

Corrugated tubing with circular corrugations around the longitudinal axis and cylindrical tubing ends with a length of 40 mm which can for example be connected directly to fittings, stopcocks or hose connectors. Together with BOLA Laboratory Screw Joints, the connection is absolutely tight and suitable for vacuum.



Tubing size NW	I.D.	Tubing end O.D.	Bending radius <sup>1</sup> mm	Pressure load max. bar	Length 0,25 m Cat. No.:	Length 0,5 m Cat. No.:	Length 1,0 m Cat. No.:	Length 2,5 m Cat. No.:
4,5	2	4	5	1,7		S 1822-01	S 1822-19	S 1822-52
8	6	8	15	2	S 1822-92	S 1822-02	S 1822-20	S 1822-56
10	8	10	18	2	S 1822-93	S 1822-04	S 1822-22	S 1822-60
13	10	12	23	2	S 1822-94	S 1822-06	S 1822-24	S 1822-64
14	12	14	25	2		S 1822-08	S 1822-26	S 1822-68
16	14	16	28	2		S 1822-10	S 1822-28	S 1822-72
19	16	18	32	2	S 1822-98	S 1822-14	S 1822-32	S 1822-76
21	17,5	20	35	2		S 1822-16	S 1822-34	S 1822-80
23	20,9	(1") 25,4	40	1,2		S 1822-18	S 1822-36	S 1822-84

« Special Request? »  
+49 (0) 93 46-92 86-0

### Product advantages:

- » flexible to highly flexible
- » tight bending radius only causes little cross-section reduction
- » non-porous
- » translucent

### Applications:

- » ideal for connections under vibrations
- » usable with a small bending radius
- » for compensation of thermal expansions
- » for easy handling of liquids



**HELPFUL:** page 125  
Flexible tubing made of static dissipative PFA-EX




**SUITABLE:** page 71  
Laboratory screw joints

## BOLA Customized Flexible Tubing

Flexible tubing made of PFA can be manufactured individually according to your specifications. We would be glad to send you a quotation. Please complete the list below and send us a copy by fax to +49 (0)9346-928651. Thank you.

Quantity:	
Tubing size NW:	
<b>A</b> Tubing end length:	
<b>B</b> Tubing end length:	
<b>C</b> Total length:	
<b>D</b> Tubing end I. D.:	
<b>E</b> Tubing end O.D.:	

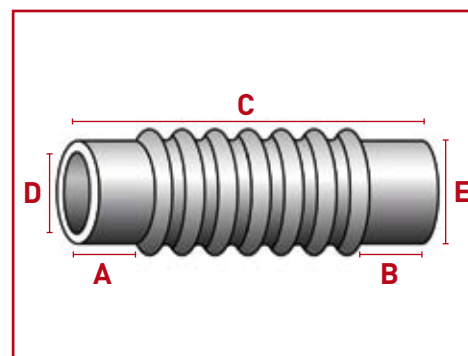

<sup>1</sup> Bending radius: minimum bending radius in mm at a room temperature of 23°C

**BOLA PTFE Tubing**

Material: **PTFE**      Temperature resistance: **from -200°C to +250°C**      Chemical resistance: **+++ universal**



Product description:  
Translucent to milky-white appearance

**Product advantages:**

- » almost universal chemical resistance
- » free from extractable agents
- » physiologically safe
- » non-adhesive surface
- » very good sliding characteristics
- » very good dielectric characteristics
- » flame retardant according to UL94V0
- » oxygen value more than 95
- » resistant to irradiation and weather
- » can be sterilized in ETO and in autoclaves

FDA conform



**SUITABLE:** page 67  
Fittings, Screw Joints,  
Stopcocks, Valves


I.D. mm	O.D. mm	Wall thickness mm	Bending radius <sup>1</sup> mm	Burst pressure <sup>2</sup> bar	Cat. No.:
0,2	{1/16"} 1,6	0,70	6	960	S 1810-01
0,2	0,4	0,10	2	960	S 1810-02
0,3	0,6	0,15	3	140	S 1810-04
0,3	{1/16"} 1,6	0,65	4	606	S 1810-05
0,4	0,9	0,25	3	175	S 1810-06
0,5	1,0	0,25	4	140	S 1810-08
0,5	{1/16"} 1,6	0,55	5	308	S 1810-09
{1/32"} 0,8	{1/16"} 1,6	0,40	7	140	S 1810-10
1,0	{1/16"} 1,6	0,30	8	84	S 1810-12
1,0	2,0	0,50	8	140	S 1810-14
1,0	3,0	1,00	9	280	S 1810-16
1,2	1,8	0,30	8	70	S 1810-18
1,4	2,2	0,40	12	80	S 1810-19
1,5	2,1	0,30	14	56	S 1810-20
1,5	2,5	0,50	13	93	S 1810-22
1,5	3,0	0,75	12	140	S 1810-23
1,5	3,5	1,00	12	186	S 1810-21
{1/16"} 1,6	{1/8"} 3,2	0,80	13	140	S 1810-26
{1/16"} 1,6	2,4	0,40	14	70	S 1810-24
1,9	2,5	0,30	20	44	S 1810-28
2,0	3,0	0,50	18	70	S 1810-30
2,0	4,0	1,00	16	140	S 1810-32
2,4	{1/8"} 3,2	0,40	25	46	S 1810-33
3,0	4,0	0,50	32	46	S 1810-34
3,0	5,0	1,00	25	93	S 1810-36
3,0	6,0	1,50	24	140	S 1810-37
4,0	5,0	0,50	50	35	S 1810-38

I.D. mm	O.D. mm	Wall thickness mm	Bending radius <sup>1</sup> mm	Burst pressure <sup>2</sup> bar	Cat. No.:
Continuation of tubing diameters					
{1/8"} 3,175	{1/4"} 6,35	1,58	26	140	S 1810-39
4,0	6,0	1,00	36	70	S 1810-40
{11/64"} 4,35	{1/4"} 6,35	1,00	40	64	S 1810-42
{3/16"} 4,78	{1/4"} 6,35	0,79	51	46	S 1810-43
5,0	6,0	0,50	72	28	S 1810-44
5,0	7,0	1,00	49	56	S 1810-46
6,0	7,0	0,50	98	23	S 1810-48
6,0	8,0	1,00	64	46	S 1810-50
7,0	8,0	0,50	128	20	S 1810-52
7,0	9,0	1,00	81	40	S 1810-54
7,5	10,0	1,25	80	46	S 1810-56
8,0	{3/8"} 9,52	0,75	120	26	S 1810-58
8,0	10,0	1,00	100	35	S 1810-60
8,0	11,0	1,50	80	52	S 1810-61
8,0	12,0	2,00	72	70	S 1810-62
9,0	11,0	1,00	121	31	S 1810-63
10,0	12,0	1,00	144	28	S 1810-64
10,0	14,0	2,00	98	56	S 1810-66
12,0	14,0	1,00	196	23	S 1810-68
12,0	16,0	2,00	128	46	S 1810-70
13,0	16,0	1,50	170	32	S 1810-72
14,0	16,0	1,00	256	20	S 1810-74
16,0	18,0	1,00	324	17	S 1810-78
18,0	20,0	1,00	400	16	S 1810-84
20,0	22,0	1,00	490	14	S 1810-88

You will find further tubing diameters in the adjoining chart

**Applications:**

- » Perfect tubing for aggressive and pure liquids or gases



**HELPFUL:** page 125  
Tubing made of static dissipative PTFE-EX

<sup>1</sup> Bending radius: minimum bending radius in mm at a room temperature of 23°C

<sup>2</sup> Burst pressure: computed value in bar at a room temperature of 23°C. It is recommended to restrict the maximum working pressure to 25% of the burst pressure. For higher temperatures, this value has to be multiplied by the reduction factor shown on page 284. It is the user's responsibility to check if the used tubing fulfils the respective requirements.

## BOLA FEP Tubing


Material: <b>FEP</b>	Temperature resistance: <b>from -200°C to +205°C</b>	Chemical resistance: <b>+++ universal</b>	Transparency: <b>transparent</b>
-------------------------	---	--	-------------------------------------

Product description:  
Transparent, gastight tubing



### Product advantages:

- » non-porous
- » almost universal chemical resistance
- » free from extractable agents
- » physiologically safe
- » non-adhesive surface
- » very good sliding characteristics
- » very good dielectric characteristics
- » flame retardant according to UL94V0
- » oxygen value more than 95
- » resistant to irradiation and weather
- » can be sterilized in Gamma, ETO, E-Beam and in autoclaves

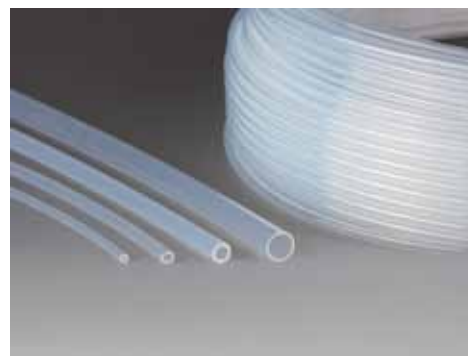

**NEW**

**NEW**

**NEW**

I.D. mm	O.D. mm	Wall thickness mm	Bending radius <sup>1</sup> mm	Burst pressure <sup>2</sup> bar	Cat. No.:
(1/32") 0,8	(1/16") 1,6	0,40	7	112	S 1815-04
1,5	3,0	0,75	12	112	S 1815-05
(1/16") 1,6	(1/8") 3,2	0,80	13	112	S 1815-08
2,0	3,0	0,50	18	56	S 1815-07
2,0	4,0	1,00	16	112	S 1815-12
(1/8") 3,175	(1/4") 6,35	1,58	26	112	S 1815-14
3,6	6,0	1,20	30	75	S 1815-16
(5/32") 3,96	(1/4") 6,35	1,20	34	67	S 1815-24
4,0	6,0	1,00	36	56	S 1815-20
(11/64") 4,35	(1/4") 6,35	1,00	52	51	S 1815-28
(3/16") 4,78	(1/4") 6,35	0,79	51	37	S 1815-30
5,6	8,0	1,20	53	48	S 1815-32
6,0	8,0	1,00	64	37	S 1815-36
(1/4") 6,35	(3/8") 9,52	1,59	58	56	S 1815-40
6,8	10,0	1,60	63	53	S 1815-44
8,0	10,0	1,00	100	28	S 1815-48
(3/8") 9,52	(1/2") 12,7	1,59	101	37	S 1815-56
10,0	12,0	1,00	144	22	S 1815-60
12,0	14,0	1,00	196	19	S 1815-68

### Applications:

- » Perfect tubing for aggressive and pure liquids or gases



### BOLA Practical Tip

Uwe Hossfeld » application engineering

#### How can you calculate the maximum bending radius?

Very easy: Squared outer diameter of tubing divided by wall thickness.



### PTFE and PFA Tubing

- » All BOLA Tubing have small tolerance on the outer diameter and the wall thickness. This assures that fittings and screw joints always match.



Inge Fenstad » Chiron AS

<sup>1</sup> Bending radius: minimum bending radius in mm at a room temperature of 23°C

<sup>2</sup> Burst pressure: computed value in bar at a room temperature of 23°C. It is recommended to restrict the maximum working pressure to 25% of the burst pressure. For higher temperatures, this value has to be multiplied by the reduction factor shown on page 284. It is the user's responsibility to check if the used tubing fulfils the respective requirements.

## BOLA PFA Tubing

Material: <b>PFA</b>	Temperature resistance: <b>from -200°C to +260°C</b>	Chemical resistance: <b>+++ universal</b>	Transparency: <b>transparent</b>
-------------------------	---	--	-------------------------------------

Product description:  
Transparent, gastight tubing




### Product advantages:

- » non-porous
- » almost universal chemical resistance
- » free from extractable agents
- » physiologically safe
- » non-adhesive surface
- » very good sliding characteristics
- » very good dielectric characteristics
- » flame retardant according to UL94V0
- » oxygen value more than 95
- » resistant to irradiation and weather
- » can be sterilized in Gamma, ETO, E-Beam and in autoclaves
- » mechanical strength even at high temperatures

	I.D. mm	O.D. mm	Wall thickness mm	Bending radius <sup>1</sup> mm	Burst pressure <sup>2</sup> bar	Cat. No.:
<b>NEW</b>	(1/32") 0,8	(1/16") 1,6	0,40	7	140	S 1811-02
	1,5	3,0	0,75	12	140	S 1811-03
<b>NEW</b>	(1/16") 1,6	(1/8") 3,2	0,80	13	140	S 1811-04
	2,0	3,0	0,50	18	70	S 1811-05
	2,0	4,0	1,00	16	140	S 1811-06
	(1/8") 3,175	(1/4") 6,35	1,58	26	140	S 1811-07
<b>NEW</b>	3,6	6,0	1,20	30	96	S 1811-08
	(5/32") 3,96	(1/4") 6,35	1,20	34	84	S 1811-12
	4,0	6,0	1,00	36	70	S 1811-10
	(11/64") 4,35	(1/4") 6,35	1,00	52	64	S 1811-14
	(3/16") 4,78	(1/4") 6,35	0,79	51	46	S 1811-15
	5,6	8,0	1,20	53	60	S 1811-16
	6,0	8,0	1,00	64	46	S 1811-18
	(1/4") 6,35	(3/8") 9,52	1,59	58	70	S 1811-20
	6,8	10,0	1,60	63	66	S 1811-22
	8,0	10,0	1,00	100	35	S 1811-24
<b>NEW</b>	8,8	12,0	1,60	90	51	S 1811-26
	(3/8") 9,52	(1/2") 12,7	1,59	101	47	S 1811-28
	10,0	12,0	1,00	144	28	S 1811-30
	12,0	14,0	1,00	196	23	S 1811-40
	14,0	16,0	1,00	256	20	S 1811-50

### Applications:

- » Perfect tubing for aggressive and pure liquids or gases

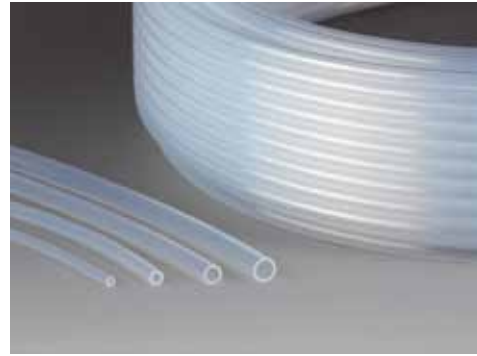

## BOLA INNOVATION

### Perfect connection

Tubing with industrial standards have a very big range of tolerance. This can lead to problems regarding connection. BOLA Tubing is exactly suited to the strict BOLA standard.



**HELPFUL:** page 125  
Tubing made of static dissipative PFA-EX

<sup>1</sup> Bending radius: minimum bending radius in mm at a room temperature of 23°C

<sup>2</sup> Burst pressure: computed value in bar at a room temperature of 23°C. It is recommended to restrict the maximum working pressure to 25% of the burst pressure. For higher temperatures, this value has to be multiplied by the reduction factor shown on page 284. It is the user's responsibility to check if the used tubing fulfils the respective requirements.

## BOLA Flanged Corrugated Tubing

Material: <b>PFA</b>	Temperature resistance: <b>from -45 °C to +180 °C</b>	Chemical resistance: <b>+++ universal</b>	Transparency: <b>transparent</b>	Vacuum: <b>suitable</b>
-------------------------	--	--	-------------------------------------	----------------------------

**Product description:**

Corrugated tubing with circular corrugations around the longitudinal axis and flanged end pieces made of PFA, with two preassembled screw caps with GL thread made of PBTP and washers made of silicone for direct connection to components and devices with GL screw neck. The connection is absolutely tight and suitable for vacuum.

**NEW**

FDA conform

Tubing size NW	I.D. mm	O.D. mm	For thread GL	Bending radius <sup>1</sup> mm	Pressure load max. bar	Length 0,5 m Cat. No.:	Length 1,0 m Cat. No.:
4,5	4,3	6,8	14	5	1,7	<b>S 1880-05</b>	<b>S 1880-35</b>
8	7,7	10,7	18	15	3,4	<b>S 1880-10</b>	<b>S 1880-40</b>
10	9,7	13,0	18	18	2,8	<b>S 1880-15</b>	<b>S 1880-45</b>
13	12,4	16,1	25	23	2,6	<b>S 1880-20</b>	<b>S 1880-50</b>

**Applications:**

Ideal for connections under vibrations or thermal expansions. Small bending radius allow connections in a tight space. More lengths on demand.



## BOLA Heat Shrinkable Tubing

Material: <b>PTFE</b>	Temperature resistance: <b>from -200°C to +250°C</b>	Chemical resistance: <b>+++ universal</b>	Transparency: <b>transparent</b>	Shrink rate: <b>4:1</b>
--------------------------	---	--	-------------------------------------	----------------------------

**Product description:**

For protection of probes, cables, electric components etc. against chemical disturbance. The shrink rate of 4:1 means that the inner diameter of the tubing shrinks to approx. 1/4 of the original inner diameter and that the length shrinks to approx. 15%. Good heat transmission due to low wall thickness.

FDA conform

Expanded I.D. mm	Min. shrunk O.D. mm	Wall thickness after shrinkage mm	Cat. No.:
(5/64") 2,0	0,7	0,22	<b>S 1828-08</b>
(1/8") 3,2	1,0	0,25	<b>S 1828-16</b>
(3/16") 4,7	1,3	0,30	<b>S 1828-24</b>
(1/4") 6,3	(1/16") 1,6	0,30	<b>S 1828-32</b>
(3/8") 9,5	2,5	0,30	<b>S 1828-40</b>
(1/2") 12,7	3,7	0,38	<b>S 1828-48</b>
(3/4") 19,0	5,7	0,38	<b>S 1828-56</b>
(1") 25,4	7,0	0,38	<b>S 1828-64</b>

**Product advantages:**

- » transparent
- » incombustible (ASTM D876)
- » insulation resistance  $10^{18} \Omega/\text{cm}$  (ASTM D 876)
- » good electric strength
- » flame retardant



**HELPFUL: page 287**  
Detailed instructions  
for processing

## BOLA PFA Corrugated Tubing

Material: <b>PFA</b>	Temperature resistance: <b>from -200°C to +260°C</b>	Chemical resistance: <b>+++ universal</b>	Transparency: <b>transparent</b>	Vacuum: <b>suitable</b>
-------------------------	---	--	-------------------------------------	----------------------------

Product description:

Circular corrugations around the longitudinal axis. Can be shortened easily by means of a tubing cutter (see page 162).

FDA conform


Nominal width NW	I.D. A mm	O.D. B mm	Bending radius <sup>1</sup> C mm	Pressure load max. bar	Cat. No.:
4,5	4,3	6,8	5	1,7	S 1820-01
8	7,7	10,7	15	3,4	S 1820-02
10	9,7	13,0	18	2,8	S 1820-04
13	12,4	16,1	23	2,6	S 1820-06
14	13,7	17,8	25	2,3	S 1820-08
16	15,4	19,7	28	2,3	S 1820-10
19	18,4	23,2	32	2,2	S 1820-14
21	19,8	24,8	35	2,1	S 1820-16
23	23,8	28,8	40	1,2	S 1820-23

### Product advantages:

- » flexible to highly flexible
- » tight bending radius only causes little cross-section reduction
- » non-porous
- » translucent
- » resistant to irradiation and weather
- » almost universal chemical resistance

### Applications:

- » Perfect tubing for aggressive and pure liquids or gases

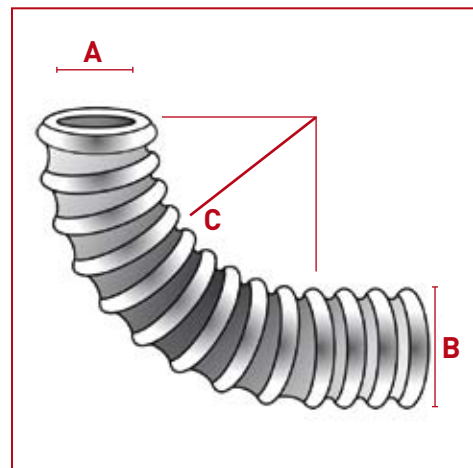

<sup>1</sup> Bending radius: minimum bending radius in mm at a room temperature of 23°C

## BOLA Colour Tubing

Material: PTFE      Temperature resistance: from -200°C to +250°C      Chemical resistance: +++ universal

**Product description:**

This completely imbued tubing is lightfast, different colours assure high safety against confusions. The colour pigments can possibly affect the chemical resistance.

I.D. mm	O.D. mm	Bending radius <sup>1</sup> mm	Colour	Cat. No.:
4	6	36	red	S 1861-40
6	8	64	red	S 1861-50
4	6	36	blue	S 1862-40
6	8	64	blue	S 1862-50
4	6	36	green	S 1863-40
6	8	64	green	S 1863-50
4	6	36	yellow	S 1864-40
6	8	64	yellow	S 1864-50



## BOLA Spiral Tubing

Material: PFA      Temperature resistance: from -200°C to +260°C      Chemical resistance: +++ universal      Transparency: transparent



**Product description:**

Spiral tubing made of PFA is manufactured individually according to your specifications. Please take the possible tubing dimensions from the list on page 157. We would be glad to send you a quotation.

**Please complete the list below and send us a copy by fax to +49 (0)9346-928651. Thank you.**

FDA conform

Quantity:	
<b>A</b> Tubing I.D.:	
<b>B</b> Tubing O.D.:	
<b>C</b> Spiral I.D.:	
<b>D</b> Spiral O.D.:	
<b>E</b> Length of tubing ends:	
<b>F</b> Length of spiral:	

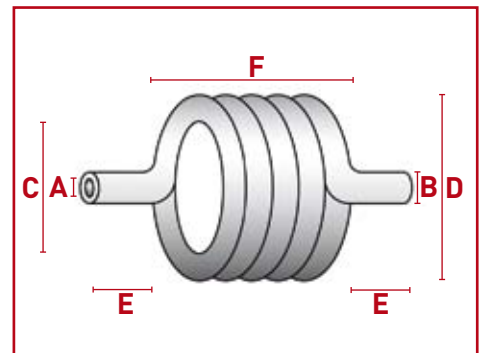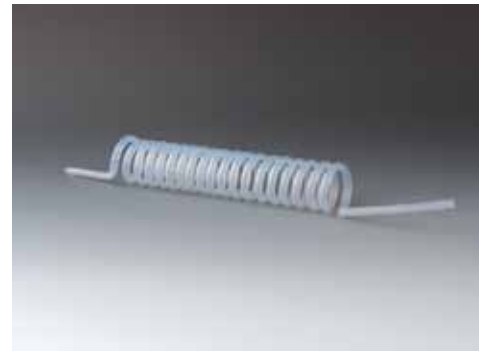



## BOLA Assortment of Remainder Tubing


Material: PTFE    Material: PFA    Material: FEP    Chemical resistance: **+++ universal**

**Product description:**

No rejections. Approx. 10 rolls of unsorted tubing made of PTFE, FEP and PFA with different diameters. Length of up to 2 metres per roll. No selection possible.

FDA conform

				<b>Cat. No.:</b>
				<b>S 1899-10</b>

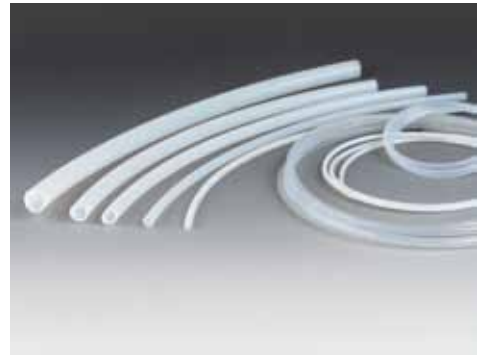

## BOLA PEEK Capillary Tubing

Material: PEEK    Temperature resistance: **from -50°C to +250°C**    Chemical resistance: **+++ universal**

**Product description:**

Flexible, brown high-pressure tubing for almost all organic or inorganic liquids.

FDA conform

I.D. mm	O.D. mm	Bending radius mm	Pressure resistant up to bar	Cat. No.:
0,25	(1/16") 1,6	4	350	<b>S 1817-08</b>
0,50	(1/16") 1,6	4	350	<b>S 1817-12</b>
(1/32") 0,80	(1/16") 1,6	4	280	<b>S 1817-16</b>
(1/16") 1,60	(1/8") 3,2	7	280	<b>S 1817-20</b>

**Product advantages:**

- » metal-free
- » corrosion-proof
- » high pressure resistance
- » biocompatible
- » high temperature resistance (melting point +334°C)
- » alternative for capillary tubes made of titan or stainless steel



## BOLA Tubing Cutter

Product description:

Ideal for cutting plastic and rubber tubing with and without textile reinforcement up to a diameter of 28 mm. The blade is exchangeable.  
Not suitable for steel reinforced tubing.

Up to tubing O.D. max. mm			Cat. No.:
28			S 1852-28



## BOLA Replacement Blades

Product description:

For tubing cutter S 1852-28.

Up to tubing O.D. max. mm			Cat. No.:
28			S 1853-28



## BOLA Tiles

Material: PTFE      Temperature resistance: from -200°C to +250°C      Chemical resistance: +++ universal

Product description:

Standard sizes with different thicknesses.

FDA conform

Length x width x height mm			Cat. No.:
300 x 300 x 2			S 1805-02
300 x 300 x 3			S 1805-04
300 x 300 x 4			S 1805-06
300 x 300 x 5			S 1805-08
300 x 300 x 6			S 1805-10
300 x 300 x 8			S 1805-12
300 x 300 x 10			S 1805-14
300 x 300 x 15			S 1805-16

**Applications:**

Ideal for using as table pad. Also suitable for using as slideway or for insulation.



**BOLA Sheets**

Material: PTFE      Temperature resistance: from -200°C to +250°C      Chemical resistance: +++ universal

Product description:  
Delivered in rolls with a length of 1000 mm. Colour: white

FDA conform

Thickness mm	Cat. No.: width 300 mm	Cat. No.: width 600 mm
0,05	S 1803-02	S 1803-21
0,12	S 1803-04	S 1803-23
0,25	S 1803-06	S 1803-25
0,50	S 1803-08	S 1803-27
0,75	S 1803-10	S 1803-29
1,00	S 1803-12	S 1803-31
1,50	S 1803-14	S 1803-33

**Applications:**  
Ideal for using as table pad or for lining drawers. Also suitable for using as slideway or for insulation.



**BOLA FEP Sheets**

Material: FEP      Temperature resistance: from -200°C to +250°C      Chemical resistance: +++ universal

Product description:  
Transparent, gastight and non-porous rolls with a length of 1000 mm.

FDA conform

Thickness mm	Width mm	Length mm	Cat. No.:
0,025	150	1000	S 1833-04
0,05	150	1000	S 1833-08
0,25	150	1000	S 1833-16
0,025	300	1000	S 1833-34
0,05	300	1000	S 1833-38
0,25	300	1000	S 1833-46

**Applications:**  
Ideal for using as table pad or for lining drawers. Also suitable for using as slideway or for insulation.



## BOLA Rods

Material: PTFE      Temperature resistance: from -200°C to +250°C      Chemical resistance: +++ universal

**Product description:**

Virginal rods for further treatment and processing in lengths of up to 2 m. Diameter and length are nominal dimensions and can contain a machining allowance.

FDA conform

O.D. mm	Cat. No.:
6	S 1800-06
8	S 1800-08
10	S 1800-10
12	S 1800-12
15	S 1800-15
16	S 1800-16
20	S 1800-20
25	S 1800-25
30	S 1800-30
40	S 1800-40
50	S 1800-50



## BOLA Sealing Tape

Material: PTFE      Temperature resistance: from -200°C to +250°C      Chemical resistance: +++ universal

**Product description:**

For sealing threads, checked according to DIN / DVGW and KTW.

FDA conform

Width mm	Thickness mm	Length mtr.	Cat. No.:
12	0,1	12	H 960-01

**Product advantages:**

- » does not embrittle, swell and agglutinate
- » does not contain oil or grease
- » prevents rusting and sticking
- » easy removal even after years



## BOLA Flat Sealing Tapes

Material: PTFE  
 Temperature resistance: from -200°C to +250°C  
 Chemical resistance: +++ universal

Product description:  
 Deformable, virginal PTFE flat tape with expanded fibre structure.

FDA conform

Thickness mm	Width mm	Length mtr.	Cat. No.:
5	2	25	H 959-16
10	3	25	H 959-22
14	4	10	H 959-28
22	7	5	H 959-34
30	5	5	H 959-40
50	5	5	H 959-50

**Product advantages:**

- » tasteless
- » odourless up to +270°C
- » self-adhesive
- » physiologically safe
- » not ageing
- » good sealing also on uneven surfaces
- » almost universal chemical resistance
- » quick and easy assembly

**Applications:**

For making customized gaskets "on-site".



## BOLA Fluoroplastic Spray

Material: PTFE

Product description:  
 Release and anti-blocking agent as well as lubricant for laboratory.

FDA conform

Capacity ml	Cat. No.:
400	H 958-04

**Product advantages:**

- » dry and greaseless
- » CFC and silicone-free
- » heat resistant up to +260°C
- » non-adhesive and dirt-repellent
- » physiologically safe
- » excellent gliding and separating effects



## BOLA Fluorslidepaste

Material: PTFE	Temperature resistance: from -36°C to +260°C	Chemical resistance: +++ universal
-------------------	---	---------------------------------------

Product description:  
Extremely stable, synthetic high-temperature paste in resealable tube.

Capacity g			Cat. No.:
56			S 1870-16

- Product advantages:**
- » exceptionally low friction coefficient
  - » extremely long-lasting
  - » for temperatures between -36°C and over +260°C
  - » resists high mechanical loads
  - » not soluble in most solvents
  - » non-flammable
  - » oxygen-resistant
  - » compatible with all common elastomers and plastics
  - » chemical resistance against aggressive chemicals or solvents



## BOLA Fluoroplastic Sealing Paste

Material: PTFE	Temperature resistance: from -240 °C to +260 °C	Chemical resistance: +++ universal
-------------------	--	---------------------------------------

Product description:  
Odourless and nontoxic paste for all kinds of sealings, non-hardening, eliminates leaks on threads even if high pressure resistance is needed, threaded connections can easily be closed and opened, the threads are prevented from being damaged.

Capacity g				Cat. No.:
500				S 1874-16

- Product advantages:**
- » no dropping or flowing during use
  - » resealable can including brush

**Applications:**  
Suitable for many bases and acids, any kinds of solvents or gases including hydrogen, ammoniac, chlorine, propane, butane, nitrogen, as well as for air, steam, refrigerants, salt water, and fuels (do not use on liquid or gaseous oxygen and lactic acid).



## BOLA Fluoroplastic Grease Tubes

Material: <b>PTFE</b>	Temperature resistance: <b>from -20 °C to +260 °C</b>	Chemical resistance: <b>+++ universal</b>
--------------------------	--	--

Product description:  
High-performance grease for all kinds of greasing points, fine PTFE particles lower the friction between the surfaces, a special additive system provides extremely high pressure and temperature resistance, also suitable as anticorrosive, does not contain any heavy metals.

Capacity g				Cat. No.:
100				<b>S 1872-16</b>

- Product advantages:**
- » very low friction coefficient
  - » extremely high pressure and temperature resistance




## BOLA Screws with Countersunk Head

Material: <b>PTFE</b>	Temperature resistance: <b>from -200°C to +250°C</b>	Chemical resistance: <b>+++ universal</b>
--------------------------	---	--

Product description:  
Similar to DIN 963/DIN EN ISO 2009

FDA conform

Thread M	Pitch mm	Usable length mm	Dia. of head mm	Cat. No.:
4	0,7	30	8,4	H 1124-14
5	0,8	30	9,3	H 1124-18
6	1,0	30	11,3	H 1124-22
8	1,25	40	15,8	H 1124-26
10	1,50	40	18,3	H 1124-30




## BOLA Screws with Cylindrical Head

Material: <b>PTFE</b>	Temperature resistance: <b>from -200°C to +250°C</b>	Chemical resistance: <b>+++ universal</b>
--------------------------	---	--

Product description:  
Similar to DIN 84/DIN EN ISO 1207

FDA conform

Thread M	Pitch mm	Usable length mm	Dia. of head x Height of head mm	Cat. No.:
4	0,7	30	7,0 x 4,0	H 1128-14
5	0,8	30	8,5 x 4,5	H 1128-18
6	1,0	30	10,0 x 5,0	H 1128-22
8	1,25	40	13,0 x 6,0	H 1128-26
10	1,50	40	16,0 x 7,0	H 1128-30



« »  
Special Request?  
+49 (0) 93 46-92 86-0

## BOLA Hexagon Nuts

Material: **PTFE**      Temperature resistance: **from -200°C to +250°C**      Chemical resistance: **+++ universal**

Product description:  
Similar to DIN 934 / DIN EN ISO 4032

FDA conform

Thread M	Pitch mm	Hexagon mm	Height mm	Cat. No.:
4	0,7	7	5,0	H 1132-14
5	0,8	8	6,0	H 1132-18
6	1,0	10	7,5	H 1132-22
8	1,25	13	9,0	H 1132-26
10	1,50	16	11,0	H 1132-30



## BOLA Washers

Material: **PTFE**      Temperature resistance: **from -200°C to +250°C**      Chemical resistance: **+++ universal**

Product description:  
Similar to DIN 125-1, packing unit: 10 pieces

FDA conform

Thread M	O.D. mm	I.D. mm	Height mm	Cat. No.:
4	9,0	4,3	0,9	H 1126-14
5	10,0	5,3	1,1	H 1126-18
6	12,0	6,4	1,8	H 1126-22
8	16,0	8,4	1,8	H 1126-26
10	20,0	10,5	2,2	H 1126-30



## BOLA Boiling Stones

Material: **PTFE**      Temperature resistance: **from -200°C to +250°C**      Chemical resistance: **+++ universal**

Product description:  
Prevent splashes and production of bubbles during boiling.  
Packed in resealable bag.

FDA conform

Grain size mm	Packing unit g	Cat. No.:
4	500	H 972-02
6	500	H 972-04

**Product advantages:**

- » durable
- » almost universal chemical resistance





## BOLA Balls

Material: PTFE  
Temperature resistance: from -200°C to +250°C  
Chemical resistance: +++ universal

Product description:

Made of solid PTFE, with smooth surface. Different packing units.

FDA conform

Dia. of ball mm	Packing unit	Cat. No.:
3	pack of 100 pieces	H 964-03
6	pack of 100 pieces	H 964-06
9	pack of 100 pieces	H 964-09
15	pack of 50 pieces	H 964-15
20	pack of 50 pieces	H 964-18
25	pack of 25 pieces	H 964-21
30	pack of 25 pieces	H 964-24

**Applications:**

For extension of surfaces of e. g. distillation apparatus;  
as splash guard





# Ground Joint Components



No matter if you use sleeves with gripping ring, with ribs or sleeves for spherical ground joints - you always make the right choice since they all feature the unique properties of PTFE.

## PRODUCT TIPS



Page 175:  
Bellows



Page 172:  
Sleeves



Page 174:  
Sleeves for spherical ground joints

# BOLA Sleeves

## BOLA Sleeves

– helpful accessories for many applications

All BOLA sleeves are sealing without any grease and the product will not be contaminated by any greasy residues. They are made for creating gastight, liquid-tight and vacuum tight ground joint connections.

Sealing rings on the outside of the sleeves and a low friction coefficient of PTFE prevent sticking of the ground joints. This reduces the danger of breaking and injury.

The sleeves have an excellent chemical resistance and can be used at working temperatures between -200°C and + 250°C.

Their solid construction (partly with gripping ring) makes them suitable for continued use.


All common joint clamps can still be used.

The sleeves are available for European and American ground joint sizes.



### BOLA Sleeves – with sealing rings.

Punctiform sealing on the rings improves both sealing and releasing.

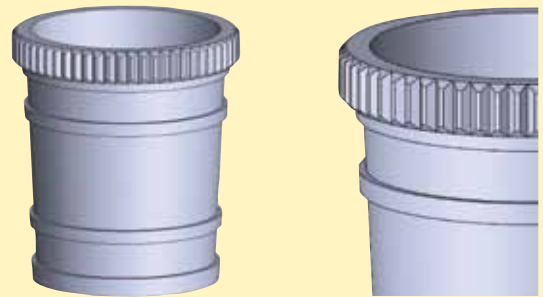

## BOLA Sleeves with Gripping Ring

**BESTSELLER**

Material:	Temperature resistance:	Chemical resistance:	Vacuum:	Feature:
PTFE	from -200 °C to +250°C	+++ universal	suitable	reusable

### Product description:

Made of PTFE, with gripping ring and sealing rings on the outside, high-vacuum tight sealing; low leak rate:  $<1 \times 10^{-4}$  mbar x l x s<sup>-1</sup>; solid construction for continued use; sealing rings are easy accessible and therefore easy to clean.



FDA conform

European standard Size NS	ES Cat. No.:	US standard Size	US Cat. No.:
10/19	H 933-01	14/20	H 935-01
12/21	H 933-02	19/22	H 935-03
14/23	H 933-03	24/40	H 935-05
19/26	H 933-04	29/42	H 935-06
24/29	H 933-05	45/50	H 935-09
29/32	H 933-06		
34/35	H 933-07		
45/40	H 933-09		
50/42	H 933-10		
55/44	H 933-11		
60/46	H 933-12		
71/51	H 933-13		
85/55	H 933-14		
100/60	H 933-15		



## BOLA Sleeves with Gripping Ring

**BESTSELLER**

Material: <b>PTFE</b>	Temperature resistance: <b>from -200 °C to +250°C</b>	Chemical resistance: <b>+++ universal</b>	Vacuum: <b>suitable</b>	Feature: <b>reusable</b>
--------------------------	--	--	----------------------------	-----------------------------

### Product description:

Made of PTFE, with gripping ring and sealing rings on the outside, high-vacuum tight sealing; low leak rate:  $<1 \times 10^{-4}$  mbar x l x s<sup>-1</sup>; solid construction for continued use; sealing rings are easy accessible and therefore easy to clean.


**FDA conform**

European standard Size NS	ES Cat. No.:	US standard Size	US Cat. No.:
10/19	H 933-01	14/20	H 935-01
12/21	H 933-02	19/22	H 935-03
14/23	H 933-03	24/40	H 935-05
19/26	H 933-04	29/42	H 935-06
24/29	H 933-05	45/50	H 935-09
29/32	H 933-06		
34/35	H 933-07		
45/40	H 933-09		
50/42	H 933-10		
55/44	H 933-11		
60/46	H 933-12		
71/51	H 933-13		
85/55	H 933-14		
100/60	H 933-15		



### BOLA INNOVATION

#### Sleeves

BOLA Sleeves for gastight, liquid-tight connections have sealing rings on the outside which provide a punctal sealing. This prevents sticking and allows easy removal

## BOLA Spherical Ground Joint Sleeves

Material: <b>PTFE</b>	Temperature resistance: <b>from -200 °C to +250°C</b>	Chemical resistance: <b>+++ universal</b>	Vacuum: <b>suitable</b>	Feature: <b>reusable</b>
--------------------------	--	--	----------------------------	-----------------------------

Product description:

Made of PTFE, with gripping ring and sealing rings on the outside, high-vacuum tight sealing; low leak rate:  $<1 \times 10^{-2}$  mbar x l x s<sup>-1</sup>; solid construction for continued use.

FDA conform

European standard Size S	ES Cat. No.:	US standard Size KS	US Cat. No.:
13	H 934-02	18	H 931-04
19	H 934-04	28	H 931-06
29	H 934-06	35	H 931-10
35	H 934-08	55	H 931-16
40	H 934-12		
51	H 934-16		
64	H 934-18		



## BOLA Joint Clamps

Material: <b>PTFE</b>	Temperature resistance: <b>from -50 °C to +250°C</b>	Chemical resistance: <b>+++ universal</b>	Feature: <b>reusable</b>
--------------------------	---	--	-----------------------------

Product description:

PTFE-encapsulated steel spring core. Universal chemical resistance since the product is only exposed to PTFE.

FDA conform

Size NS	Cat. No.:
14/23	H 942-14
19/26	H 942-19
29/32	H 942-32
45/40	H 942-45

### Applications:

For connecting ground joint parts, especially if highly aggressive liquids are involved; high recovery even at high temperatures.



## BOLA Bellows

Material: <b>PTFE</b>	Temperature resistance: <b>from -200 °C to +250°C</b>	Chemical resistance: <b>+++ universal</b>	Vacuum: <b>suitable</b>
--------------------------	--	--	----------------------------

Product description:

Made of PTFE, with round folds and sealing rings on the outside; maximum deflection: 40°.

FDA conform

Socket NS	Cone NS	Total minimum length mm	Total maximum length mm	Cat. No.:
14/23	14/23	86	90	H 907-03
29/32	29/32	106	114	H 907-10
45/40	45/40	128	144	H 907-15

### Applications:

Strainless connection of ground joint equipment; for compensating vibrations from vacuum pumps; for length compensation of heated columns; angular misalignment.



175

GROUND JOINT COMPONENTS

**BESTSELLER**

## BOLA Bellows

Material: <b>PTFE</b>	Temperature resistance: <b>from -200 °C to +250°C</b>	Chemical resistance: <b>+++ universal</b>	Vacuum: <b>suitable</b>
--------------------------	--	--	----------------------------

Product description:

Made of PTFE, with sharp folds and sealing rings on the outside; maximum deflection: 120°.

FDA conform

<b>A</b>	Socket NS <small>European standard</small>	Cone NS	Total minimum length mm	Total maximum length mm	<b>ES</b> Cat. No.:
	14/23	14/23	82	90	H 906-02
	19/26	19/26	93	105	H 906-04
	24/29	24/29	110	124	H 906-06
	29/32	29/32	100	120	H 906-12
	45/40	45/40	130	170	H 906-14
<b>B</b>	Socket <small>US standard</small>	Cone	Total minimum length mm	Total maximum length mm	<b>US</b> Cat. No.:
	14/35	14/35	82	90	H 905-02
	19/22	19/22	95	97	H 905-07
	24/40	24/40	120	137	H 905-15
	29/42	29/42	124	142	H 905-17
	45/50	45/50	150	165	H 905-21

### Applications:

Strainless connection of ground joint equipment; for compensating vibrations from vacuum pumps; for length compensation of heated columns; angular misalignment.



Special Request?  
+49 (0) 93 46-92 86-0

## BOLA Stoppers

**BESTSELLER**

Material: PTFE Temperature resistance: from -200 °C to +250°C Chemical resistance: +++ universal

Product description:


Made of PTFE, with ground joint and sealing rings on the outside; knurled or hexagonal grip. Compared with glass stoppers, they are easily removable and can be used without grease. The stoppers can expand under heat which might lead to a breaking of the ground joint sockets.

FDA conform

A			B		
Size NS	Knurled grip Cat. No.:		Size NS	Wrench size (SW) mm	Hexagonal grip Cat. No.:
10/19	H 936-02				
12/21	H 936-03				
14/23	H 936-04		14/23	19	H 937-04
19/26	H 936-05		19/26	26	H 937-05
24/29	H 936-06				
29/32	H 936-07		29/32	35	H 937-07
34/35	H 936-08				
45/40	H 936-10		45/40	52	H 937-10

**Applications:**

For closing ground joint parts.

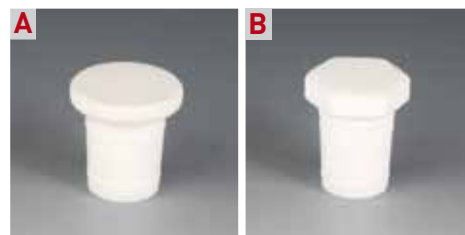

Special Request?  
+49 (0) 93 46-92 86-0

## BOLA Ground Joint Adaptors

Material: PTFE Temperature resistance: from -200 °C to +250°C Chemical resistance: +++ universal

Product description:

Made of PTFE, socket in cone, with sealing rings on the outside and knurled grip.

FDA conform

Socket NS	Cone NS	Knurled grip dia. mm	Cat. No.:
14/23	19/26	30	H 980-03
14/23	29/32	40	H 980-06
19/26	29/32	40	H 980-09
29/32	45/40	55	H 980-12

**Applications:**

For connecting different ground joint sizes.





## BOLA Ground Joint-GL Tube Fittings

Material: <b>PTFE</b>	Temperature resistance <b>from -200°C to +250°C</b>	Chemical resistance: <b>+++ universal</b>	Vacuum: <b>suitable</b>
--------------------------	--	--	----------------------------

Product description:  
Fitting made of PTFE, for transition from ground joints to GL threads. For connection of hard-walled tubing (e.g. PTFE, PFA, FEP) with BOLA Laboratory Screw Joints (see page 71). Ground joint body with turned rings and knurled grip for opening. The product is only exposed to PTFE.

FDA conform

Cone size NS	Bore dia. mm	Thread GL	Cat. No.:
14/23	6,5	14	D 570-08
19/26	10,5	18	D 570-16
29/32	14,5	25	D 570-32

**Applications:**  
For connecting tubes or tubing to vessels with ground joint. For inserting and fixing probes, thermometers, dip tubes or cables.



## BOLA Socket-GL Tube Fittings

Material: <b>PTFE</b>	Temperature resistance <b>from -200°C to +250°C</b>	Chemical resistance: <b>+++ universal</b>	Vacuum: <b>suitable</b>
--------------------------	--	--	----------------------------

Product description:  
Fitting made of PTFE, with socket for tubes with ground joint and GL thread for connection of hard-walled tubing (e.g. PTFE, PFA, FEP) with BOLA Laboratory Screw Joints (see page 71). The product is only exposed to PTFE.

FDA conform

Socket size NS	Bore dia. mm	Thread GL	Cat. No.:
14/23	6,5	14	D 571-08
19/26	10,5	18	D 571-16
29/32	12,5	25	D 571-32
45/40	20,5	32	D 571-40



## BOLA Spherical Ground Joint-GL Tube Fittings


Material: <b>PTFE</b>	Temperature resistance <b>from -200°C to +250°C</b>	Chemical resistance: <b>+++ universal</b>	Vacuum: <b>suitable</b>
--------------------------	--	--	----------------------------

Product description:  
Fitting made of PTFE, for transition from spherical ground joints to GL threads. For connection of hard-walled tubing (e.g. PTFE, PFA, FEP) with BOLA Laboratory Screw Joints (see page 71). The product is only exposed to PTFE.

FDA conform

Spherical ground joint size S	Thread GL	Bore dia. mm	Angle A max.	Cat. No.:
19	18	10,5	25°	D 790-24
29	25	14,5	20°	D 790-36
35	25	14,5	10°	D 790-48

**Applications:**  
For connecting tubes or tubing to vessels with ground joint. For inserting and fixing probes, thermometers, dip tubes or cables.



## BOLA Multiple Distributors with Ground Joint

Material: <b>PTFE</b>	Temperature resistance <b>from -200°C to +250°C</b>	Chemical resistance: <b>+++ universal</b>	Vacuum: <b>suitable</b>	autoclave: <b>121°</b>
--------------------------	--	--	----------------------------	---------------------------

Product description:

Completely made of PTFE. With ground joint size 29/32 and two GL-threaded necks. Integrated special nut for easy unlocking of the ground joint. For the connection of tubing or tube made of glass, plastic or metal by means of laboratory screw joints.

FDA conform

For ground joint NS	For tubing O.D. max. mm	Necks GL	Cat. No.:
29/32	2 x 8	2 x 14	<b>D 620-08</b>

### Applications:

For bottles or reaction vessels with ground joint. For transferring liquids without contamination. For connection to a liquid source or a pressure or vacuum system.



### BOLA Praxis-Tip

Benjamin Schmitt  
» engineering



**You have a ground joint, but you don't know exactly its size?**

Take our ground joint reducing set which allows bridging different cone and socket sizes.

see page 179

## BOLA Ground Joint-GL-Adaptors

Material: <b>PTFE, PPS</b>	Temperature resistance <b>from -20°C to +200°C</b>	Chemical resistance: <b>+++ universal</b>	Vacuum: <b>suitable</b>
-------------------------------	---	--	----------------------------

Product description:

Black screw cap made of PPS with GL 45 thread or blue screw cap made of PP with GLS 80 thread, movable insert with ground joint made of PTFE. Transition from a ground joint to a glass thread. The body can be turned independently from the screw cap. The completely assembled adaptor can be removed and fixed on another bottle without the risk of disarranging the tubing. Very good chemical resistance, for working temperatures up to max. +200°C.

FDA conform

	For bottle thread GL	Ground joint NS	Cat. No.:
<b>A</b>	45	29/32	<b>D 734-40</b>
	45	45/40	<b>D 734-44</b>

Material: <b>PTFE, PP</b>	Temperature resistance <b>from 0°C to +110°C</b>	Chemical resistance: <b>+++ universal</b>	Vacuum: <b>suitable</b>
------------------------------	---	--	----------------------------

	For bottle thread GLS	Ground joint NS	Cat. No.:
<b>B</b>	80	29/32	<b>D 734-50</b>
	80	45/40	<b>D 734-54</b>

### Applications:

Assembly of components with ground joint (condensers, stirrer bearings etc.) on glass bottles or GL-threaded necks.



**BOLA Ground Joint Reducing Set**

Material: <b>PTFE</b>	Temperature resistance: <b>from -200 °C to +250°C</b>	Chemical resistance: <b>+++ universal</b>	Vacuum: <b>suitable</b>
--------------------------	--	--	----------------------------

Product description:  
Made of PTFE, consisting of reducing rings graduated as follows:  
NS 14 – NS 19 – NS 24 – NS 29 – NS 34 - NS 45 and NS 60.

FDA conform

Dimensions NS	Height/length of ground joint mm	Cat. No.:
14 - 60	20	H 981-14

**Applications:**  
For bridging different cone and socket sizes e. g. a NS 14 cone can functionally be placed into a NS 45 socket.



**BOLA Glass Flange Metal Adaptors**

Material: <b>PTFE, Silicone</b>	Temperature resistance: <b>from -60°C to +230°C</b>	Chemical resistance: <b>+++ universal</b>	Pressure: <b>low</b>	Vacuum: <b>suitable</b>
------------------------------------	--	--	-------------------------	----------------------------

Product description:  
Made of PTFE and silicone, circular PTFE collar facilitates assembly and assures exact placement of the gasket. The elasticity for expansions and contractions is given by a special kind of silicone which is placed behind PTFE sealing lips. Universal chemical resistance since the product is only exposed to PTFE.

FDA conform

Nominal width	O.D. mm	Bore dia. mm	Sealing height mm	Cat. No.:
10	25	14	2	D 720-10
15	32	16	3	D 720-15
25	47	27	3	D 720-25

**Applications:**  
For HWS® "Adaptor, metal, for flexible metallic hose" for a reliable sealing between glass flange and metal adaptor. Ideal for sealing temper connections, e.g. on double walled vessels.



## BOLA O-Rings

Material: PTFE      Temperature resistance: from -200 °C to +250°C      Chemical resistance: +++ universal

Product description:

Made of PTFE. Due to the nearly inexhaustible possibilities of dimensions we only manufacture PTFE-O-Rings to your specifications. We would be glad to send you a quotation.

**Please complete the list below and send us a copy by fax to +49 (0)9346-928651. Thank you.**

FDA conform


Quantity:

**A** O-Ring I.D.:

**B** Thickness:

**Applications:**

As sealing.

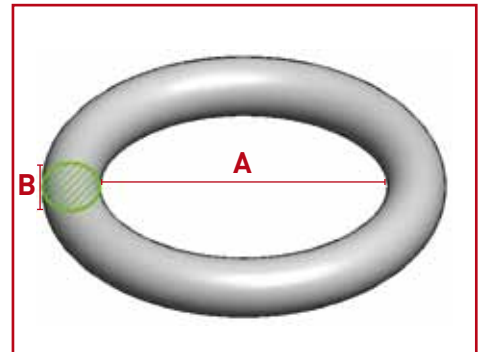

## BOLA O-Rings for Laboratory Flat Flanges

Material: FEP      Temperature resistance: from -60°C to +205°C      Chemical resistance: ++ very good

Product description:

Silicone core with seamless FEP coating; manufactured according to DIN 12214:1996-12; flexible, almost universal chemical resistance.

FDA conform

For flat flange NW	Dimensions mm	Cat. No.:
60	75 x 4	H 969-18
100	110 x 4	H 969-25
120	132 x 4	H 969-45
150	155 x 5	H 969-55
200	214 x 5	H 969-75

**Applications:**

As sealing for flat flange with groove.



## BOLA Tri-Clamp Fittings

Tri-Clamp is a standardized fitting system which is widely used in the chemical, pharmaceutical and food industry for all kind of applications that require easy to clean, reliable and safe to assemble components.

Besides the low dead volume, the easy assembly is another advantage of the Tri-Clamp system.

The flangelike connectors are pressed on each other and secured with a locking clip.

A suiting gasket provides additionally a reliable sealing. The wing screw on the locking clip allows a fast loosening and closing of the connection whenever necessary.

Using BOLA Tri-Clamp-Fittings, hard walled tubes and tubing made of glass or plastics can easily be connected to the GL threaded sockets of the single components by using BOLA Laboratory Screw Joints (see page 71). This connection is tight and can be operated under pressure and vacuum. All BOLA Tri-Clamp-connectors are made of PTFE and therefore provide a high chemical as well as thermal resistance. All components can be sterilized if necessary.

BOLA products with Tri-Clamp are manufactured as per the standard DIN 32 676. Other dimensions or adaptors for transition to other threads can be offered on request.

### BOLA Adaptor Tri-Clamp Hose Connector

Material: PTFE      Temperature resistance: from -200 °C to + 250 °C      Chemical resistance: +++ universal

Product description:  
Fitting made of PTFE for transition of Tri-Clamp as per DIN 32 676 to a hose connector. Universal chemical resistance, the flowing product is only exposed to PTFE.

**NEW**

FDA conform

Plate-Ø mm	Nominal size as per DIN	For tube I.D. mm	Hose Connector O.D. mm	Cat. No.:
25,5	DN 08	8,0	10,4	D 915-02
34,0	DN 10	10,0	10,4	D 915-22
50,5	DN 25	26,0	16,0	D 915-42

**Applications:**

For connection of elastic tubing (such as silicone, Viton®, Tygon®) to Tri-Clamp components as per DIN 32 676.



## BOLA Tri-Clamp GL-Adaptor

Material: PTFE Temperature resistance: from -200 °C to +250 °C Chemical resistance: +++ universal

Product description:  
Fitting made of PTFE for transition of Tri-Clamp as per DIN 32 676 to a GL-threaded neck. Universal chemical resistance, the flowing product is only exposed to PTFE.

**NEW**

FDA conform

Plate-Ø mm	Nominal size as per DIN	For tube I.D. mm	Threaded Neck GL	Cat. No.:
25,5	DN 08	8,0	14	D 901-02
25,5	DN 10	10,0	18	D 901-04
25,5	DN 10	10,0	25	D 901-06
34,0	DN 10	10,0	14	D 901-22
34,0	DN 15	16,0	18	D 901-24
34,0	DN 20	20,0	25	D 901-26
50,5	DN 25	26,0	14	D 901-42
50,5	DN 25	26,0	18	D 901-44
50,5	DN 32	32,0	25	D 901-46
50,5	DN 40	38,0	45	D 901-48
91,0	DN 65	66,0	18	D 901-72
91,0	DN 65	66,0	25	D 901-74
91,0	DN 65	66,0	45	D 901-76

### Applications:

For connection of hard-walled tubing (such as glass, stainless steel) or fluoroplastic tubes (such as PTFE, PFA, FEP) with BOLA Laboratory Screw Joints to Tri-Clamp components as per DIN 32 676.

« »  
Special Request?  
+49 (0) 93 46-92 86-0



## BOLA Tri-Clamp Multiple Distributor

Material: PTFE Temperature resistance: from -200 °C to +250 °C Chemical resistance: +++ universal

Product description:  
Fitting made of PTFE for transition of Tri-Clamp as per DIN 32 676 to two or three GL-threaded necks. Universal chemical resistance, the flowing product is only exposed to PTFE.

**NEW**

FDA conform

Plate-Ø mm	Nominal size as per DIN	For tube I.D. mm	Threaded Neck GL	Bore diam. mm	Cat. No.:
25,5	DN 10	10,0	2x 14	2x 4,5	D 911-02
34,0	DN 20	20,0	2x 14	2x 8,5	D 911-22
50,5	DN 40	38,0	3x 14	3x 8,5	D 911-42
50,5	DN 40	38,0	3x 18	3x 10,5	D 911-44
91,0	DN 65	66,0	3x 18	3x 10,5	D 911-72

### Applications:

For connection of hard-walled tubing (such as glass, stainless steel) or fluoroplastic tubes (such as PTFE, PFA, FEP) with BOLA Laboratory Screw Joints to Tri-Clamp components as per DIN 32 676.



## BOLA Tri-Clamp GL-Stopcocks

Material: PTFE, PP  
 Temperature resistance: from 0 °C to +110 °C  
 Chemical resistance: +++ universal

Product description:  
 2-Way stopcock made of PTFE with straight bore, one Tri-Clamp neck as per DIN 32 676 and one GL-threaded neck. Cylindrical stopcock made of PTFE for reliable tightness and grip made of PP for marking the flow direction. Universal chemical resistance, the flowing product is only exposed to PTFE.

**NEW**

FDA conform

Plate-Ø mm	Nominal size as per DIN	For tube I.D. mm	connecting thread GL	bore dia. mm	Cat. No.:
25,5	DN 08	8,0	18	6,0	D 917-02
34,0	DN 10	10,0	18	6,0	D 917-22
34,0	DN 15	16,0	25	8,0	D 917-24
50,5	DN 25	26,0	25	8,0	D 917-42

### Applications:

Quick and easy disconnection of flow. For connection of hard-walled tubing (such as glass, stainless steel) or fluoroplastic tubes (such as PTFE, PFA and FEP) with BOLA Laboratory Screw Joints to Tri-Clamp components as per DIN 32 676.



## BOLA Tri-Clamp Gaskets

Material: PTFE, Silicone  
 Temperature resistance: from -200 °C to +250 °C  
 Chemical resistance: +++ universal

Product description:  
 Silicone ring with double-sided, elastic washer made of PTFE. Suitable for Tri-Clamp connections as per DIN 32 676. Universal chemical resistance, the flowing product is only exposed to PTFE.

**NEW**

FDA conform

Plate-Ø mm	Nominal size as per DIN	For tube I.D. mm	Cat. No.:
25,5	DN 08	8,0	D 930-02
25,5	DN 10	10,0	D 930-04
34,0	DN 10	10,0	D 930-22
34,0	DN 15	16,0	D 930-24
34,0	DN 20	20,0	D 930-26
50,5	DN 25	26,0	D 930-42
50,5	DN 32	32,0	D 930-44
50,5	DN 40	38,0	D 930-46
64,0	DN 50	50,0	D 930-62
91,0	DN 65	66,0	D 930-72

### Applications:

Chemical inert, reusable gasket for Tri-Clamp connections as per DIN 32 676.





## BOLA offers custom manufacture.

Every lab is different. By offering an extensive range of established and sophisticated standard solutions we take into account the varied requirements of the respective branches and sectors.

But maybe you are looking for something special? Something that is not included in our standard product range?

In that case we are able to offer an individual custom manufacture. This is easier and faster than you may expect. Discuss your idea with our professionals. They will give advise and support during design. Finally, your idea will become real: We produce as per your requirements and in compliance with the chosen raw materials – already from 1 piece.

We only need a drawing (a sketch is sufficient) and some further information

» **You have a special request?**

Give us a call: +49 (0) 93 46-92 86-0.



# Temperature Measurement



Precise and reliable measurements even in aggressive liquids - all probes are encapsulated with PTFE for maximum chemical resistance.

## PRODUCT TIPS



Page 190:  
PT 100 Temperature Probes



Page 189:  
Double PT100 Temperature Probes



Page 193:  
Total Immersion Probes

# BOLA Temperature Probes and Total Immersion Probes



## Build-up and function of BOLA Temperature Probes

Two different sensors are used for BOLA Temperature Probes.

BOLA Temperature Probes PT 100 and PT 1000 are resistance thermometers which measure temperature correlated to platinum's changing electrical resistance under temperature influence with a deposited table of values.

BOLA Temperature Probes Type K are thermocouples which measure temperature with the help of changing voltage inside the sensor under temperature influence.

The sensors of all BOLA Temperature Probes, PT 100, PT 1000 and Type K are located at the end of a PTFE-encapsulated stainless steel tube (material code: 1.4571).

The stainless steel tube provides certain rigidity, but can be bent to the requested form by hand, so that the sensor can be oriented to the optimum measuring point.

For BOLA Temperatures Probes PT 100 and PT 1000, connection to the measuring device is made either with a socket or plug type Lemo® size 1 or by connecting directly the strands of the cable to the device.

For BOLA Temperature Probes Type K, connection to the measuring device is either made by using the SMP-connector or by connecting directly the strands to the device.

The cable itself is also encapsulated with PFA and connected tightly to the temperature probe

## Advantages of BOLA Temperature Probes

### Reduction of response time

Temperature Probes PT 100 and PT 1000 have tapered tips which reduce the response time considerably.

### Chemical resistance and metal-free

The PTFE encapsulation provides an almost universal chemical resistance. All parts which are exposed to the medium do not contain any metals.

### Safe to handle

Due to the collar ring at its end, the probe cannot fall into the medium.

### High accuracy of measurement


The four-wire system of the PT 100 probes eliminates nearly completely the influence of the resistivity and the transition resistance (failure: approx. 0,002-0,004 % / Ohm). Normally, a calibration is not necessary. Long connecting cables can be used with the four-wire system.

PT 1000 probes use the two-wire system. At 0 °C, PT 100 probes have a resistance of 100 Ohm whereas PT 1000 probes have a resistance of 1000 Ohm. Due to the high inherent resistance of PT 1000 probes, the measuring result is insignificantly influenced by the resistivity of the measuring line. Thus the measured temperature deviates minimally from the actual temperature even when long connecting cables are used.

## Performance Data of BOLA Temperature Probes

### 4-wire-system - PT 100

Pin configuration of the LEMO® socket/plug



### Temperature probe / PT 100

#### Temperature range:

-50°C to +250°C

#### Specification:

DIN EN 60751

#### Type:

Platinum temperature sensor

#### Class:

A

#### Tolerance:

0,15 + (0,002 x (t))

#### Typical aberrations:


at 0°C: +/- 0,15°C

at 100°C: +/- 0,35°C



### Performance Data of BOLA Temperature Probes 2-wire-system - PT 1000


Pin configuration of the LEMO® socket plug



#### Temperature probe / PT 1000

<b>Temperature range:</b>	-50°C to +250°C
<b>Specification:</b>	DIN EN 60751
<b>Type:</b>	Platinum temperature sensor
<b>Class:</b>	A
<b>Tolerance:</b>	0,15 + (0,002 x (t))
<b>Typical aberrations:</b>	at 0°C: +/- 0,15°C at 100°C: +/- 0,35°C

Pin configuration of the Temperature Probe K



#### Temperature Probe K

<b>Temperature range:</b>	0°C to +300°C
<b>Specification:</b>	IEC60584.3:2007
<b>Type:</b>	Type K Thermocouple
<b>Tolerance:</b>	+/- 0,15° C

### Difference between PT 100 and PT 1000

Both, PT 100 and PT 1000 probes are resistance thermometers but have a different coefficient of temperature. Depending on the platinum used, PT 1000 probes have a coefficient of temperature of 3,85 Ohm/°C and PT 100 probes of 0,385 Ohm/°C. This means, at 0 °C the platinum of the PT 1000 sensor has a resistance of 1000 Ohm, at 1 °C of 1003,85 Ohm and so on. A PT 1000 probe has a higher gradient and thus offers a higher resolution. The inherent resistance of the connecting cable does not influence the measuring results of PT 1000 probes. For PT 100 probes, the measuring device compensates the inherent resistance of the connecting cable. Therefore not all devices can handle both probe types.

### We produce temperature probes according to your indications

Do you need a different temperature probe?  
No problem - we can quote for your special requirements.

### Coating custom temperature probes and thermometers

We can coat your temperature probes or thermometers with a PTFE heat-shrinkable tubing so that they have the chemical resistance of PTFE. Even if the probes or thermometers break, there is no risk of contamination due to the PTFE coating.

Because of the thin coating, the probe or thermometer has slower response behavior.

For coating, your probe/thermometer has to resist a short-time temperature of minimum +250 °C.

Please contact us!

# BOLA Temperature Probes and Total Immersion Probes



### Response times of BOLA Temperature Probes

Due to the properties of PTFE, the response times of PTFE-encapsulated temperature probes are longer than the response times of glass or metal probes. We have indicated all corresponding T 50 and T 90 values of our temperature probes.



**HELPFUL:** page 282  
Determination of response times of temperature probes

### BOLA Temperature Probes made of static dissipative PTFE-EX

Besides Compact Probes with a PTFE-encapsulation, also identical Temperature Probes Compact EX encapsulated with black, static dissipative PTFE-EX are available at BOLA. By adding conductive pigments like soot and electrographitised carbon, the electrically isolating PTFE becomes static dissipative.

The construction and performance data are identical with the known BOLA Temperature Probes.

You will find BOLA Temperature Probes Compact EX on page 129. Please see also page 117 for additional information on BOLA products in static dissipative materials.

### Plugs and sockets

Our temperature probes are normally supplied with plugs or sockets type LEMO® size 1. Should you need a different LEMO® size, we can offer corresponding adaptors.

We can also supply temperature probes with your specific plug or socket. You can find below the most important dimensions for determination of LEMO® plugs and sockets.



### Easy identification of plug and socket size!

You can find out your plug or socket size as follows:



**Plug Lemo Size 0**  
O.D. 7 mm



**Plug Lemo Size 1**  
O.D. 9 mm



**Socket Lemo Size 0**  
O.D. 9 mm



**Socket Lemo Size 1**  
O.D. 12 mm



## BOLA Double Temperature Probes PT 100 Lemo® Compact

Material: PTFE	Temperature resistance: from -200°C to +250°C	Chemical resistance: +++ universal	Temperature range: from -50°C to +250°C
-------------------	--	---------------------------------------	--

### Product description:

Two independent measuring sensors PT 100 in one PTFE-encapsulated stainless steel tube (1.4571). Collar ring Ø 12 mm. Connection by two couplings (type Lemo®, socket size 1, 4-wire system) fixed directly at the end of the probe.

FDA conform

### Typical response times:

- » T 50: 20 - 24 s
- » T 90: 30 s

See page 282 for detailed explanation.

Usable length mm	Probe dia. mm	Total length mm	Number of sensors	Width of coupling A mm	Cat. No.:
300	8	400	2 x PT 100	27	P 1740-20
400	8	500	2 x PT 100	27	P 1740-23
500	8	600	2 x PT 100	27	P 1740-30
300	6	400	2 x PT 100	27	P 1740-40

### Applications:

- » parallel temperature measurement in aggressive liquids
- » double safety due to redundant systems
- » control function due to two independent measuring sensors
- » Suitable for simultaneous temperature measurement and safety circuit as per the specifications of the standard DIN EN 61010-2-010 but only one NS/GL socket will be occupied, separately switched sensors.
- » ideal for built-in measurement cables
- » Identical versions also available in static dissipative PTFE-EX (see page 129)

**BESTSELLER**



probe tip

socket



## BOLA INNOVATION

### Double Temperature Probes Lemo® Compact

Two PT 100 elements in one PTFE-encapsulated stainless steel tube combine several functions: for example measuring temperature in aggressive liquids or making measurements in safety circuit.



## BOLA BENEFITS

- » Compact production series
- » Different length of cable can be connected
- » Exchange of the cable is possible without any problems

### BOLA Temperature Probes PT 100 Lemo® Compact

Material: <b>PTFE</b>	Temperature resistance: <b>from -200°C to +250°C</b>	Chemical resistance: <b>+++ universal</b>	Temperature range: <b>from -50°C to +250°C</b>
--------------------------	---	--	---

**Product description:**

One measuring sensor PT 100 in a PTFE-encapsulated stainless steel tube (1.4571). Temperature probe Ø 8 mm, tip Ø 6 mm, collar ring Ø 12 mm. Connection by a coupling (type Lemo®, socket size 1, 4-wire system) fixed directly at the end of the probe.

**Typical response times:**

- » T 50: 7 - 12 s
- » T 90: 14 - 16 s

See page 282 for detailed explanation.

FDA conform

Usable length mm	Total length mm	Connector	Cat. No.:
100	170	socket, 4-wire-system	<b>P 1730-10</b>
300	370	socket, 4-wire-system	<b>P 1730-20</b>
400	470	socket, 4-wire-system	<b>P 1730-23</b>
500	570	socket, 4-wire-system	<b>P 1730-25</b>

**Applications:**

- » temperature measurement in aggressive liquids
- » ideal for built-in measurement cables
- » Identical versions also available in static dissipative PTFE-EX (see page 129)

**BESTSELLER**



probe tip



socket



### BOLA INNOVATION

#### Temperature Probes Lemo® Compact

Many measuring sensors are connected directly to the cable. The Lemo® connector of BOLA Temperature Probes Compact is connected to the sensor so that the temperature probe can be exchanged easily.



**SUITABLE:** page 101  
Swivelling screw fittings

## BOLA Temperature Probes PT 100

Material: <b>PTFE</b>	Temperature resistance: <b>from -200°C to +250°C</b>	Chemical resistance: <b>+++ universal</b>	Temperature range: <b>from -50°C to +250°C</b>
--------------------------	---	--	---

### Product description:

One measuring sensor PT 100 in a PTFE-encapsulated stainless steel tube (1.471). Temperature probe  $\varnothing$  8mm, tip  $\varnothing$  6mm, collar ring  $\varnothing$  12mm. With white PFA-coated cable (length: 1,5m, 4 strands).

FDA conform

### Typical response times:

» T 50: 7 - 12 s

» T 90: 14 - 16 s

See page 282 for detailed explanation.

Usable length mm	Total length mm	Connector	Cat. No.:
100	160	strands, 4-wire-system	<b>P 1750-10</b>
200	260	strands, 4-wire-system	<b>P 1750-15</b>
300	360	strands, 4-wire-system	<b>P 1750-20</b>
500	560	strands, 4-wire-system	<b>P 1750-25</b>
600	660	strands, 4-wire-system	<b>P 1750-30</b>

### Applications:

- » temperature measurement in aggressive liquids
- » cable provides flexible connection from measuring device to medium



probe tip

connecting cable



**SUITABLE:** page 26  
Slip-on Baffles to transform temperature probes to baffles.

## BOLA Temperature Probes PT 100 Lemo®

Material: <b>PTFE</b>	Temperature resistance: <b>from -200°C to +250°C</b>	Chemical resistance: <b>+++ universal</b>	Temperature range: <b>from -50°C to +250°C</b>
--------------------------	---	--	---

### Product description:

One measuring sensor PT 100 in a PTFE-encapsulated stainless steel tube (1.471). Temperature probe  $\varnothing$  8mm, tip  $\varnothing$  6mm, collar ring  $\varnothing$  12mm. With white PFA-coated cable (length: 1,5m) and coupling (type Lemo® socket size 1, 4-wire-system).

FDA conform

### Typical response times:

» T 50: 7 - 12 s

» T 90: 14 - 16 s

See page 282 for detailed explanation.

Usable length mm	Total length mm	Connector	Cat. No.:
100	160	socket, 4-wire-system	<b>P 1760-10</b>
200	260	socket, 4-wire-system	<b>P 1760-15</b>
300	360	socket, 4-wire-system	<b>P 1760-20</b>
500	560	socket, 4-wire-system	<b>P 1760-25</b>
600	660	socket, 4-wire-system	<b>P 1760-30</b>

### Applications:

- » temperature measurement in aggressive liquids
- » cable provides flexible connection from measuring device to medium



probe tip

socket

« | »  
Special Request?  
+49 (0) 93 46-92 86-0

## BOLA Temperature Probes PT 100 Lemo®

Material: PTFE	Temperature resistance: from -200°C to +250°C	Chemical resistance: +++ universal	Temperature range: from -50°C to +250°C
-------------------	--	---------------------------------------	--

### Product description:

One measuring sensor PT 100 in a PTFE encapsulated stainless steel tube (1.4571). Temperature probe Ø 8 mm, tip Ø 6 mm, collar ring Ø 12 mm. With white PFA-coated cable (length: 1,5 m) and mounted Lemo® plug size 1, 4-wire system.

**NEW**

### Typical response times:

- » T 50: 16 - 18 s
- » T 90: 47 - 50 s

FDA conform

See page 282 for detailed explanation.

Usable length mm	Total length mm	Connector	Cat. No.:
100	160	plug, 4-wire-system	P 1762-10
200	260	plug, 4-wire-system	P 1762-15
300	360	plug, 4-wire-system	P 1762-20
500	560	plug, 4-wire-system	P 1762-25
600	660	plug, 4-wire-system	P 1762-30

### Applications:

- » temperature measurement in aggressive liquids
- » cable provides flexible connection from measuring device to medium



## BOLA Total Immersion Probes PT 100

Material: PTFE	Temperature resistance: from -200°C to +250°C	Chemical resistance: +++ universal	Temperature range: from -50°C to +250°C
-------------------	--	---------------------------------------	--

### Product description:

Total immersion probe (class A, PRT 100), with white PFA-coated cable length: 4 m, (4 strands) and collar ring Ø 5 mm.

FDA conform

### Typical response times:

- » T 50: 4 - 6 s
- » T 90: 6 - 8 s

See page 282 for detailed explanation.

Usable length mm	Probe dia. mm	Connector	Cat. No.:
50	4	strands, 4-wire-system	P 1780-20

### Applications:

- » temperature measurement in aggressive liquids
- » cable provides flexible connection from measuring device to medium





## BOLA Total Immersion Probes PT 100 Lemo®

Material: <b>PTFE</b>	Temperature resistance: <b>from -200°C to +250°C</b>	Chemical resistance: <b>+++ universal</b>	Temperature range: <b>from -50°C to +250°C</b>
--------------------------	---	--	---

Product description:

Total immersion probe (class A, PRT 100), with white PFA-coated cable (length: 4 m), coupling (type Lemo®, socket size 1, 4-wire) and collar ring Ø 5 mm.

### Typical response times:

- » T 50: 4 - 6 s
- » T 90: 6 - 8 s

See page 282 for detailed explanation.

FDA conform

Usable length mm	Probe dia. mm	Connector	Cat. No.:
50	4	socket, 4-wire-system	P 1790-20

### Applications:

- » e.g. for measuring temperatures in autoclaves
- » can be immersed totally into the liquid



probe tip



socket

## BOLA Total Immersion Probes PT 100 Lemo®

Material: <b>PTFE</b>	Temperature resistance: <b>from -200°C to +250°C</b>	Chemical resistance: <b>+++ universal</b>	Temperature range: <b>from -50°C to +250°C</b>
--------------------------	---	--	---

Produktbeschreibung:

Total immersion probe (class A, PRT 100), with white PFA-coated cable (length: 4 m), coupling (type Lemo®, plug size 1, 4-wire) and collar ring Ø 5 mm.

### Typical response times:

- » T 50: 4 - 6 s
- » T 90: 6 - 8 s

See page 282 for detailed explanation.

FDA conform

Usable length mm	Probe dia. mm	Connector	Cat. No.:
50	4	plug, 4-wire-system	P 1792-20

### Applications:

- » e.g. for measuring temperatures in autoclaves
- » can be immersed totally into the liquid



probe tip



plug



## BOLA Temperature Probes PT 1000

Material: <b>PTFE</b>	Temperature resistance: <b>from -200°C to +250°C</b>	Chemical resistance: <b>+++ universal</b>	Temperature range: <b>from -50°C to +250°C</b>
--------------------------	---	--	---

**Product description:**

One measuring sensor PT 1000 in a PTFE encapsulated stainless steel tube (1.4571). Temperature probe Ø 8 mm, tip Ø 6 mm, collar ring Ø 12 mm. With white PFA-coated cable (length: 1,5 m, 2-wire system).

**NEW**

FDA conform

**Typical response times:**

- » T 50: 16 - 18 s
- » T 90: 47 - 50 s

See page 282 for detailed explanation.

Usable length mm	Total length mm ca.	Connector	Cat. No.
200	260	strands, 2-wire system	<b>P 1950-15</b>
300	360	strands, 2-wire system	<b>P 1950-20</b>
500	560	strands, 2-wire system	<b>P 1950-25</b>
600	660	strands, 2-wire system	<b>P 1950-30</b>



probe tip

connecting cable



**SUITABLE:** page 26  
Slip-on Baffles to transform temperature probes to baffles.

## BOLA Temperature Probes PT 1000 Lemo®

Material: <b>PTFE</b>	Temperature resistance: <b>from -200°C to +250°C</b>	Chemical resistance: <b>+++ universal</b>	Temperature range: <b>from -50°C to +250°C</b>
--------------------------	---	--	---

**Product description:**

One measuring sensor PT 1000 in a PTFE encapsulated stainless steel tube (1.4571). Temperature probe Ø 8 mm, tip Ø 6 mm, collar ring Ø 12 mm. With white PFA-coated cable (length: 1,5 m) and mounted Lemo® plug size 1, 2-wire system.

**NEW**

FDA conform

**Typical response times:**

- » T 50: 16 - 18 s
- » T 90: 47 - 50 s

See page 282 for detailed explanation.

Usable length mm	Total length mm	Connector	Cat. No.:
200	260	plug, 2-wire system	<b>P 1962-15</b>
300	360	plug, 2-wire system	<b>P 1962-20</b>
500	560	plug, 2-wire system	<b>P 1962-25</b>
600	660	plug, 2-wire system	<b>P 1962-30</b>

**Applications:**

- » temperature measurement in aggressive liquids
- » cable provides flexible connection from measuring device to medium



probe tip

plug

## BOLA Total Immersion Probes PT 1000

Material: <b>PTFE, PFA</b>	Temperature resistance: <b>from -200°C to +250°C</b>	Chemical resistance: <b>+++ universal</b>	Temperature range: <b>from -50°C to +250°C</b>
-------------------------------	---	--	---

Product description:

Total immersion probe PT 1000, collar ring Ø 5 mm. With white PFA-coated cable (length: 4 m, 2-wire system).

**NEW**

FDA conform

### Typical response times:

- » T 50: 16 - 18 s
- » T 90: 47 - 50 s


See page 282 for detailed explanation.

Usable length mm	Probe dia. mm	Connector	Cat. No.:
50	4	strands, 2-wire system	P 1980-20

### Applications:

- » e.g. for measuring temperatures in autoclaves
- » can be immersed totally into the liquid

« »  
Special Request?  
+49 (0) 93 46-92 86-0



## BOLA Total Immersion Probes PT 1000 Lemo®

Material: <b>PTFE, PFA</b>	Temperature resistance: <b>from -200°C to +250°C</b>	Chemical resistance: <b>+++ universal</b>	Temperature range: <b>from -50°C to +250°C</b>
-------------------------------	---	--	---

Product description:

Total immersion probe PT 1000, collar ring Ø 5 mm. With white PFA-coated cable (length: 4 m), mounted Lemo® plug size 1, 2-wire system.

**NEW**

FDA conform

### Typical response times:

- » T 50: 16 - 18 s
- » T 90: 47 - 50 s

See page 282 for detailed explanation.

Usable length mm	Probe dia. mm	Connector	Cat. No.:
50	4	plug, 2-wire system	P 1992-20

### Applications:

- » e.g. for measuring temperatures in autoclaves
- » can be immersed totally into the liquid



### Temperature Probes

- » Compared to stainless steel probes, BOLA Temperature Probes offer best chemical resistance. And unlike glass, they are unbreakable. «

Inge Fenstad » Chiron AS

## BOLA Temperature Probes K

Material: <b>PTFE</b>	Temperature resistance: <b>from -200°C to +250°C</b>	Chemical resistance: <b>+++ universal</b>	Temperature range: <b>from -50°C to +250°C</b>
--------------------------	---	--	---

Product description:

Thermocouple K (Ni Cr + Ni) in a PTFE-encapsulated stainless steel tube (1.4571). Temperature probe Ø 8 mm, pointed tip, collar ring Ø 12 mm. With green PTFE-coated cable (length: 1,5m, 2-wire-system)

FDA conform

**Typical response times:**

» T 50: 25 s


» T 90: 59 s

See page 282 for detailed explanation.

Usable length mm	Total length mm	Connector	Cat. No.:
200	260	strands, 2-wire-system	<b>P 1850-15</b>
300	360	strands, 2-wire-system	<b>P 1850-20</b>
500	560	strands, 2-wire-system	<b>P 1850-25</b>

**Applications:**

- » temperature measurement in aggressive liquids
- » cable provides flexible connection from measuring device to medium



probe tip

connecting cable

## BOLA Temperature Probes K with SMP-Connector

Material: <b>PTFE</b>	Temperature resistance: <b>from -200°C to +250°C</b>	Chemical resistance: <b>+++ universal</b>	Temperature range: <b>from -50°C to +250°C</b>
--------------------------	---	--	---

Product description:

Thermocouple K (Ni Cr + Ni) in a PTFE-encapsulated stainless steel tube (1.4571). Temperature probe Ø 8 mm, pointed tip, collar ring Ø 12 mm. With green PTFE-coated cable (length: 1,5m) and SMP-connector.

FDA conform

**Typical response times:**

» T 50: 25 s

» T 90: 59 s

See page 282 for detailed explanation.

Usable length mm	Total length mm	Connector	Cat. No.:
200	260	SMP plug, 2-wire-system	<b>P 1860-15</b>
300	360	SMP plug, 2-wire-system	<b>P 1860-20</b>
500	560	SMP plug, 2-wire-system	<b>P 1860-25</b>

**Applications:**

- » temperature measurement in aggressive liquids
- » cable provides flexible connection from measuring device to medium



probe tip

connecting cable



**SUITABLE:** page 26

Slip-on Baffles to transform temperature probes to baffles.

## BOLA Conductivity Probe

Material: PTFE, Hastelloy  
 Temperature resistance: from -200 °C to +250 °C  
 Chemical resistance: +++ universal

### Product description:

Two PTFE-encapsulated electrodes made of Hastelloy® C4 (material no. 2.4610). Bare measuring tip, the electrodes with a diam. of 2,5 mm are separated by a PTFE spacer. Application: for measurement of electric conductivity and specific resistance to determine the salinity in solvents. Connection to the measuring device is made with a PFA-coated cable (length: 1,5 m, 2-wire) by connecting the braids directly or with a plug/socket to be provided by customer.

**NEW**

Usable length mm	Probe dia. mm	Cat. No.:
400	10	L 1390-40

### Product advantages:

- » non-breakable
- » very good chemical resistance
- » easy cleanable

### Applications:

- » Measurement of salinity in solvents in reaction vessels or flasks
- » Control of water purity
- » Testing for contaminants in fuels



probe tip

connecting cable

## BOLA Leading-in for Sensors

Material: PTFE, PPS  
 Temperature resistance: from -200°C to +250°C  
 Chemical resistance: +++ universal

### Product description:

Black screw cap made of PPS with GL 45 thread, movable body made of PTFE with adjusting screw for fixing and sealing sensors. The product is only exposed to PTFE.

FDA conform

For thread GL	For sensor dia. mm	Cat. No.:
45	12 (+/-0,5)	D 780-14

### Applications:

For contamination-free insertion of sensors into bottles with GL 45 thread.



## BOLA Adaptors for Temperature Probes

Product description:

4-wire adaptors. BOLA temperature probes are partially equipped with a socket size 1.

	Size first side	Size second side	Length mm	Transition from size	Cat. No.:
<b>A</b>	Plug 1	Plug 1	72	Socket size 1 to Socket size 1	<b>P 1720-16</b>
<b>B</b>	Plug 1	Plug 0	65	Socket size 1 to Socket size 0	<b>P 1720-32</b>
<b>C</b>	Plug 1	Socket 0	65	Socket size 1 to Plug size 0	<b>P 1720-24</b>

### Applications:

- » for the connection of different sizes of plugs and sockets
- » for the connection of existing ports to temperature probes
- » for the connection of existing measurement cables with plugs or sockets of company Lemo®



## BOLA Extension Cable for Temperature Probe Lemo®

Product description:

PTFE-coated, 4-wire measuring cable with coupling (type Lemo®). Due to the four-wire system there is no need to compare with a measuring apparatus. Suitable for all BOLA Temperature Probes with coupling type Lemo®, socket size 1.

**NEW**

FDA conform

	Cable length mm	Size first side	Size second side	Transition from Size	Cat. No.
<b>A</b>	1.500	Plug 1	Plug 1	Socket size 1 to socket size 1	<b>P 1724-08</b>
	3.000	Plug 1	Plug 1	Socket size 1 to socket size 1	<b>P 1724-16</b>
<b>B</b>	1.500	Plug 1	Socket 1	Socket size 1 to plug size 1	<b>P 1724-38</b>
	3.000	Plug 1	Socket 1	Socket size 1 to plug size 1	<b>P 1724-46</b>

### Applications:

- » for the extension of existing measuring cables
- » for fix installation e.g. in extractor hoods



# Vessels and Distillation Equipment



199

VESSELS AND DISTILLATION EQUIPMENT

A suitable solution for practically every application in well-known BOLA-quality and optimally adapted to your needs.

## PRODUCT TIPS



Page 200:  
Scrubber Bottles



Page 215:  
Digestion Vessels



Page 226:  
Distillation Apparatus

## BOLA Scrubber Columns

Material: <b>FEP, PTFE</b>	Temperature resistance: <b>from -200°C to +205°C</b>	Chemical resistance: <b>+++ universal</b>	Pressure: <b>no pressure</b>	Transparency: <b>transparent</b>
-------------------------------	---	--	---------------------------------	-------------------------------------

Product description:

Tall, slim scrubber column made of FEP. Inlet and outlet tube as well as riser tube are made of FEP (5,6 x 8 mm), bottom and top are made of pure PTFE. The standard PTFE frit has a pore size of approx. 3 µm and is screwed on the riser tube with an M8x1 thread. It can be exchanged with the PTFE gas distributor with fine bores (Cat. No. N 1501-16 – page 260) which needs a lower primary pressure.

FDA conform

Capacity ml	Total height mm	Connection for tubing O.D. mm	O.D. of column mm	Cat. No.:
500	400	2 x 8	54	A 117-04
1.000	700	2 x 8	54	A 117-08

**Product advantages:**

- » transparent
- » unbreakable
- » intense mixing of gas due to tall riser tube
- » frit easily exchangeable

**Flow rate:**

Using the standard gas distributor and at the stated system pressure.

Cat. No.:	System pressure		
	0,1 bar	0,3 bar	0,6 bar
A 117-04	15 l/h	62,5 l/h	130,0 l/h
A 117-08	5 l/h	50,0 l/h	117,5 l/h



**SUTABLE:** page 259  
Scrubber Adaptor for Bottles with  
GL 45 and GLS 80

## BOLA Scrubber Bottles

**BESTSELLER**

Material: <b>PFA, PTFE</b>	Temperature resistance: <b>from -200°C to +250°C</b>	Chemical resistance: <b>+++ universal</b>	Pressure: <b>no pressure</b>	Transparency: <b>transparent</b>
-------------------------------	---	--	---------------------------------	-------------------------------------

Product description:

Bottle made of PFA. PTFE top with two threaded connections. The standard PTFE frit has a pore size of approx. 3 µm and is screwed on the riser tube with an M8x1 thread. It can be exchanged with the PTFE gas distributor with fine bores (Cat. No. N 1501-16 – page 260) which needs a lower primary pressure.

FDA conform

Capacity ml	Total height mm	Connection for tubing O.D. mm	O.D. of bottle mm	Artikel-Nr.:
250	175	2 x 6	60	A 118-01
500	200	2 x 6	75	A 118-02
1.000	240	2 x 8	95	A 118-03

**Product advantages:**

- » transparent
- » unbreakable
- » frit easily exchangeable

**Flow rate:**

Using the standard gas distributor and at the stated system pressure.

Cat. No.:	System pressure		
	0,1 bar	0,3 bar	0,6 bar
A 118-01	12,5 l/h	67,5 l/h	140 l/h
A 118-02	7,5 l/h	30,0 l/h	80 l/h
A 118-03	7,5 l/h	37,5 l/h	80 l/h





## BOLA Micro Scrubber Bottles

Material: <b>PFA</b>	Temperature resistance: <b>from -200°C to +250°C</b>	Chemical resistance: <b>+++ universal</b>	Pressure: <b>no pressure</b>	Transparency: <b>transparent</b>
-------------------------	---	--	---------------------------------	-------------------------------------

Product description:

For use with volumes up to 50 ml. The gas inlet tube (not included, please choose a hard-walled tubing) is inserted through the fitting on the top and can be fixed safely. The side fitting is used as gas outlet.

FDA conform

Capacity ml	Total height mm	Connection for tubing O.D. mm	O.D. of bottle mm	Cat. No.:
50	180	6	31	A 119-24

**Product advantages:**

- » transparent
- » unbreakable
- » non-porous

**Applications:**

Can also be used as cold trap.



## BOLA Wide-Mouth Bottles

Material: <b>PTFE</b>	Temperature resistance: <b>from -200°C to +250°C</b>	Chemical resistance: <b>+++ universal</b>	Pressure: <b>no pressure</b>
--------------------------	---	--	---------------------------------

Product description:

Thick-walled, smooth interior surface, screw cap.

FDA conform

Capacity ml	Total height mm	I.D. mm	O.D. mm	Thread of screw cap	Cat. No.:
1	22	9	12	M 12 x 1,0	A 100-01
5	35	15	20	M 20 x 1,5	A 100-03
10	44	18	28	GL 25 x 3,5	A 100-04
25	53	25	34	GL 32 x 4,0	A 100-05
50	72	31	45	GL 40 x 4,0	A 100-06
100	87	34	50	GL 45 x 4,0	A 100-07
250	122	34	63	GL 45 x 4,0	A 100-08
500	157	46	75	GL 56 x 4,0	A 100-09
1.000	194	58	100	GL 70 x 5,0	A 100-10



### BOLA Practical Tip

Gertrud Steinam » final examination

**BOLA products can be cleaned in dishwasher.**

Stubbornly dirty? Put in alcohol or wipe with a soft cloth soaked with ethyl alcohol, window cleaner or a detergent solution.

### BOLA Wide-Mouth Bottles with Conical Neck

Material: <b>PFA</b>	Temperature resistance: <b>from -200°C to +250°C</b>	Chemical resistance: <b>+++ universal</b>	Pressure: <b>no pressure</b>	Transparency: <b>transparent</b>
-------------------------	---	--	---------------------------------	-------------------------------------

Product description:  
Transparent, non-porous, conical neck, screw cap.

FDA conform

Capacity ml	Total height mm	I.D. mm	O.D. mm	Buttress thread S	Cat. No.:
50	94	20	38	28	A 103-03
100	117	20	45	28	A 103-06
250	153	32	61	40	A 103-09
500	181	32	76	40	A 103-12
1.000	221	32	94	40	A 103-15



**SUITABLE: page 76**  
Distributors for different threads and tubing diameters



**SUITABLE: page 82**  
Threaded adaptors for connecting different kinds of bottle threads

### BOLA Wide-Mouth Bottles with Conical Neck

Material: <b>PTFE</b>	Temperature resistance: <b>from -200°C to +250°C</b>	Chemical resistance: <b>+++ universal</b>	Pressure: <b>no pressure</b>
--------------------------	---	--	---------------------------------

Product description:  
Thick-walled, smooth interior surface, ergonomic grips on bottle and screw cap.

FDA conform

Capacity ml	Total height mm	I.D. of neck mm	O.D. mm	Thread M	Cat. No.:
25	62	19	33	25 x 2,0	A 111-16
50	77	25	43	30 x 2,0	A 111-24
100	87	33	52	42 x 2,5	A 111-32
250	112	41	67	48 x 2,5	A 111-40



### BOLA Narrow-Mouth Bottles with Conical Neck

Material: <b>PFA</b>	Temperature resistance: <b>from -200°C to +250°C</b>	Chemical resistance: <b>++ very good</b>	Pressure: <b>no pressure</b>	Transparency: <b>transparent</b>
-------------------------	---	---	---------------------------------	-------------------------------------

Product description:  
Transparent, non-porous, conical neck, tall shape, screw cap.

FDA conform

Capacity ml	Total height mm	I.D. of neck mm	O.D. mm	Thread GL	Cat. No.:
50	93	10	38	18	A 105-03
100	122	10	45	18	A 105-06
250	163	17	61	25	A 105-09
1.000	235	22	96	32	A 105-15



## BOLA Wash Bottles

Material: PFA    Temperature resistance: from -200°C to +250°C    Chemical resistance: +++ universal    Transparency: transparent

Product description:

Transparent, non-porous, graduated, screw cap.

FDA conform

Capacity ml	Total height mm	O.D. mm	Cat. No.:
250	200	60	A 114-02
500	280	72	A 114-03
1.000	320	92	A 114-04



203

## BOLA Round Bottom Flasks

**BESTSELLER**

Material: PFA    Temperature resistance: from -200°C to +250°C    Chemical resistance: +++ universal    Transparency: transparent

Product description:

Transparent, non-porous, with ground joint neck size 29.

FDA conform

Capacity ml	Total height mm	O.D. of ball mm	Cat. No.:
100	117	67	A 158-06
250	149	88	A 158-08
500	177	107	A 158-09

**Applications:**

For rotary evaporators.



**SUITABLE:** page 176  
Different types of stoppers

## BOLA Round Bottom Flasks with Two or Three Ground Joint Necks

Material: PFA Temperature resistance: from -200°C to +250°C Chemical resistance: +++ universal Transparency: transparent


Product description:

Transparent, non-porous, central ground joint neck size 29 and lateral ground joint necks.

FDA conform

A	Capacity	Total height	O.D. of ball	Lateral necks	Cat. No.:
	ml	mm	mm	NS	
	100	117	67	1 x 14/23	A 155-12
	250	149	88	1 x 29/32	A 155-20
	500	177	107	1 x 29/32	A 155-36
B	Capacity	Total height	O.D. of ball	Lateral necks	Cat. No.:
	ml	mm	mm	NS	
	100	117	67	2 x 14/23	A 156-12
	250	149	88	2 x 29/32	A 156-20
	500	177	107	2 x 29/32	A 156-36

« »  
Special Request?  
+49 (0) 93 46-92 86-0

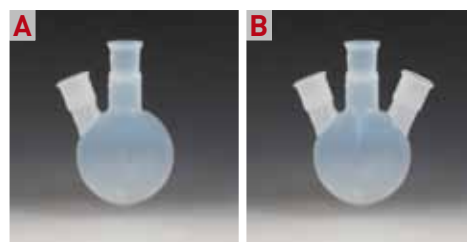

## BOLA Round Bottom Flasks with Threaded GL Necks

Material: PFA Temperature resistance: from -200°C to +250°C Chemical resistance: +++ universal Transparency: transparent

Product description:

Transparent, non-porous, central ground joint neck size 29 and 2 lateral GL 18 threaded necks (suitable laboratory screw joints with Cat. No. D 629-.. can be found on page 73).

FDA conform

	Capacity	Total height	O.D. of ball	Cat. No.:
	ml	mm	mm	
	100	117	67	A 149-12
	250	149	88	A 149-20
	500	177	107	A 149-36



### BOLA INNOVATION

#### Round Bottom Flasks with Lateral Necks

A standard glass product but made of PFA. BOLA is offering two versions: with central ground joint and two lateral necks or with ground joint or GL thread.

## BOLA Jars

Material: <b>PFA</b>	Temperature resistance: <b>from -200°C to +250°C</b>	Chemical resistance: <b>+++ universal</b>	Pressure: <b>no pressure</b>	Transparency: <b>transparent</b>
-------------------------	---	--	---------------------------------	-------------------------------------

Product description:

Translucent, non-porous, sturdy design, screw cap.

FDA conform

Capacity ml	Total height mm	O.D. mm	I.D. mm	Thread S	Depth mm	Cat. No.:
7	37	22	18,5	24	32	A 130-01
60	47	50	45,5	52	40	A 130-05
90	67	50	45,5	52	58	A 130-06
120	53	66	60,0	69	45	A 130-07
240	95	66	60,0	69	86	A 130-09
500	120	85	80,0	88	109	A 130-11
1.000	151	107	100,0	110	139	A 130-12



205

## BOLA Jars

Material: <b>PFA</b>	Temperature resistance: <b>from -200°C to +250°C</b>	Chemical resistance: <b>+++ universal</b>	Pressure: <b>no pressure</b>	Transparency: <b>transparent</b>
-------------------------	---	--	---------------------------------	-------------------------------------

Product description:

Translucent, non-porous, sturdy design, screw cap with 2 connections for tubing O.D. 6,35 mm (1/4"). Suitable PTFE, PFA and FEP tubing can be found on page 149.

FDA conform

Capacity ml	Total height mm	O.D. mm	I.D. mm	Cat. No.:
120	74	66	60	A 131-12
240	116	66	60	A 131-14



### BOLA Practical Tip

Gertrud Steinam » final examination

**BOLA products can be cleaned in dishwasher.**

Stubbornly dirty? Put in alcohol or wipe with a soft cloth soaked with ethyl alcohol, window cleaner or a detergent solution.



### Security Advice

Beakers and vessels made of fluoroplastics cannot be heated on a hotplate. Due to overheating, harmful gases can be released. See also page 283 for further advice on the heating of fluoroplastics.

## BOLA Micro Reaction Vessels

Material: PFA, PTFE    Temperature resistance: from -200°C to +250°C    Chemical resistance: +++ universal    Pressure: no pressure    Transparency: transparent

Product description:

Vessel made of translucent, non-porous PFA, screw cap made of PTFE with threaded necks for connection of e. g. thermometers, probes or sensors.

FDA conform

Capacity ml	Total height mm	O.D. mm	I.D. mm	for Tube O.D. max. mm	Threaded necks	Cat. No.:
90	96	50	45,5	2 x 8,5 / 1 x 10	2 x GL14 / 1 x GL18	<b>B 318-40</b>
240	130	66	60,0	2 x 10,0 / 1 x 16	2 x GL18 / 1 x GL25	<b>B 318-64</b>
500	158	85	80,0	3 x 16	3 x GL25	<b>B 318-80</b>



SUITABLE: page 71  
Laboratory Screw Joints

## BOLA Vials

Material: PFA    Temperature resistance: from -200°C to +250°C    Chemical resistance: +++ universal    Pressure: no pressure    Transparency: transparent

Product description:


Translucent, non-porous, with round or conical bottom, screw cap.

FDA conform

	Capacity ml	Total height mm	O.D. mm	Bottom shape	Thread S	Cat. No.:
<b>A</b>	5	36	22	conical	25	<b>A 194-04</b>
<b>B</b>	7	36	22	round	25	<b>A 195-04</b>

Applications:

For centrifugal or evaporation work.

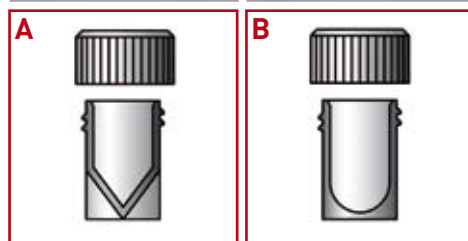

**BOLA Beakers**

Material: **PTFE**      Temperature resistance: **from -200°C to +250°C**      Chemical resistance: **+++ universal**

Product description:  
Thick-walled, smooth interior surface, reinforced upper rim, with spout.  
Optional PTFE lid with centering shoulder is available.

FDA conform

Capacity ml	Height mm	O.D. mm	I.D. mm	Cat. No.:
3	22	17	15	A 136-02
5	24	21	19	A 136-03
10	36	26	23	A 136-04
25	47	31	28	A 136-05
50	57	41	35	A 136-06
100	78	51	44	A 136-07
150	92	56	48	A 136-08
250	97	65	58	A 136-09
500	119	81	76	A 136-11
1.000	152	105	97	A 136-13
2.000	198	142	136	A 136-14
3.000	232	156	148	A 136-15



**BOLA Lids**

Material: **PTFE**      Temperature resistance: **from -200°C to +250°C**      Chemical resistance: **+++ universal**

Product description:  
Lid with centering shoulder.

FDA conform

O.D. mm	Suitable for Cat. No.:	Cat. No.:	O.D. mm	Suitable for Cat. No.:	Cat. No.:
27	A 136-03	H 927-03	82	A 136-09	H 927-09
35	A 136-04	H 927-04	94	A 136-11	H 927-11
40	A 136-05	H 927-05	125	A 136-13	H 927-13
50	A 136-06	H 927-06	166	A 136-14	H 927-14
60	A 136-07	H 927-07	185	A 136-15	H 927-15
66	A 136-08	H 927-08			



**SUITABLE: page 211**  
Thermo Beakers for hot-plates

## BOLA Jars with Ground Joint

Material: <b>PFA, PTFE</b>	Temperature resistance: <b>from -200°C to +250°C</b>	Chemical resistance: <b>+++ universal</b>	Transparency: <b>transparent</b>
-------------------------------	---	--	-------------------------------------

Product description:

Jar made of translucent, non-porous PFA, screw cap made of PFA with integrated ground joint neck size 29 made of PTFE.

FDA conform

Capacity ml	Total height mm	O.D. mm	I.D. mm	Cat. No.:
1.000	193	107	100	A 159-24

**Applications:**

Evaporation vessel for rotary evaporators, reaction vessel.



## BOLA Beakers

Material: <b>PFA</b>	Temperature resistance: <b>from -200°C to +250°C</b>	Chemical resistance: <b>+++ universal</b>	Transparency: <b>transparent</b>
-------------------------	---	--	-------------------------------------

Product description:

Translucent, non-porous, graduated, with spout.

FDA conform

Capacity ml	Total height mm	O.D. mm	Cat. No.:
25	50	23	A 137-01
50	58	39	A 137-02
100	71	50	A 137-03
250	95	67	A 137-05
500	119	82	A 137-07
1.000	141	104	A 137-09



## BOLA Measuring Cylinders

Material: <b>TFM, PTFE</b>	Temperature resistance: <b>from -200 °C to +250 °C</b>	Chemical resistance: <b>+++ universal</b>
-------------------------------	---	--

Product description:

Translucent and non-porous. Design based on ISO 4788. With graduation (uncalibrated), spout and reinforcing ring. Universal chemical resistance, the product is only exposed to PTFE.

FDA conform

Capacity ml	Graduation divisions ml	Total height mm	I. D. mm	Cat. No.
50	1	172	24	A 164-12
100	2	202	30	A 164-16
250	2,5	268	40	A 164-20
500	5	308	53	A 164-30

**Product advantages:**

- » hexagonal base prevents the cylinder from rolling
- » permanent, recessed graduation

**Application:**

Volume measurement of aggressive or pure liquids





## BOLA Watch Dishes

Material: **PTFE**      Temperature resistance: **from -200°C to +250°C**      Chemical resistance: **+++ universal**

Product description:

Convex shape

FDA conform

	O.D. mm	Height mm		Cat. No.:
	50	8		A 200-01
	75	8		A 200-02
	100	11		A 200-03
	125	12		A 200-04

**Applications:**

For blends or for covering vessels



## BOLA Evaporating Dishes

Material: **PTFE**      Temperature resistance: **from -200°C to +250°C**      Chemical resistance: **+++ universal**

Product description:

Cylindrical shape, without spout.

FDA conform

Capacity ml	Height mm	O.D. mm	I.D. mm	Cat. No.:
25	27	43	40	A 170-01
50	25	66	62	A 170-02
100	29	80	75	A 170-03
250	56	100	94	A 170-04



### Security Advice

Beakers and vessels made of fluoroplastics cannot be heated on a hotplate. Due to overheating, harmful gases can be released. See also page 283 for further advice on the heating of fluoroplastics.

## BOLA Evaporating Dishes, Conical Shape

Material: **PTFE**      Temperature resistance: **from -200°C to +250°C**      Chemical resistance: **+++ universal**

Product description:

Conical shape, with spout.

FDA conform

Capacity ml	Height mm	O.D. top mm	O.D. bottom mm	Cat. No.:
25	37	38	34	A 169-01
50	41	49	46	A 169-02
100	54	64	60	A 169-03
250	62	97	90	A 169-04



### BOLA Evaporating Dishes

Material: **PTFE**      Temperature resistance: **from -200°C to +250°C**      Chemical resistance: **+++ universal**

Product description:  
Cylindrical shape, with spout.

FDA conform

Capacity ml	Height mm	O.D. mm	I.D. mm	Cat. No.:
100	18	105	100	A 176-02
250	36	130	125	A 176-03

«      »  
Special Request?  
+49 (0) 93 46-92 86-0



SUITABLE: page 65  
Spatula and tweezers



### BOLA Evaporating Dishes

Material: **PFA**      Temperature resistance: **from -200°C to +250°C**      Chemical resistance: **+++ universal**

Product description:  
Cylindrical shape, without spout, transparent, non-porous, stackable.

FDA conform

Capacity ml	Height mm	O.D. mm	I.D. mm	Cat. No.:
15	14,0	56	50	A 177-01
100	19,5	105	100	A 177-03



### BOLA Evaporating Dishes

Material: **PFA**      Temperature resistance: **from -200°C to +250°C**      Chemical resistance: **+++ universal**

Product description:  
Conical shape, with spout, transparent, non-porous.

FDA conform

Capacity ml	Height mm	O.D. top mm	O.D. bottom mm	Cat. No.:
100	30	90	60	A 171-01



## BOLA Crucibles

Material: PTFE Temperature resistance: from -200°C to +250°C Chemical resistance: +++ universal

Product description:  
Conical, bellied shape, without spout.

FDA conform

Capacity ml	Height mm	O.D. top mm	O.D. bottom mm	Cat. No.:
25	26	49	33	A 197-03
50	35	62	33	A 197-04



## BOLA Erlenmeyer Flasks

Material: PTFE Temperature resistance: from -200°C to +250°C Chemical resistance: +++ universal Vacuum: suitable

Product description:  
Thick-walled, with ground joint.

FDA conform

Capacity ml	Height mm	O.D. bottom mm	Ground Joint NS	Cat. No.:
50	86	54	19/26	A 151-01
100	128	63	19/26	A 151-02
250	144	85	29/32	A 151-03
500	190	107	29/32	A 151-04



**SUITABLE:** page 176  
ideal coordinated stoppers

## BOLA Thermo Beakers

Material: PTFE Temperature resistance: from -200°C to + 250°C Chemical resistance: +++ universal

Product description:  
Thick-walled beaker made of PTFE, reinforced upper rim with spout. The base is made of heat resistant PTFE-carbon, thus the beaker can be heated on a hot plate up to max. +270 °C. The inside of the beaker is made of pure PTFE and provides universal chemical resistance.


**NEW**

FDA conform

Capacity ml	Height mm	O. D. mm	I. D. mm	Cat. No.
100	74	56	50	A 135-02
250	94	75	67	A 135-04
400	112	85	77	A 135-06

### Applications:

Direct heating of products in a chemical inert beaker made of PTFE. The reinforced base made of PTFE-carbon at once prevents distortions and provides a good heat transfer.

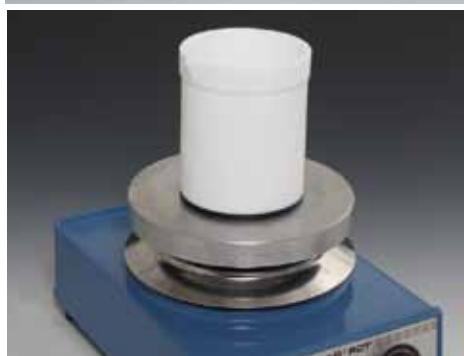

### BOLA Test Tubes

Material: <b>PFA</b>	Temperature resistance: <b>from -200°C to +250°C</b>	Chemical resistance: <b>+++ universal</b>	Transparency: <b>transparent</b>
-------------------------	---	--	-------------------------------------

Product description:  
Round bottom, transparent, non-porous, wall thickness 1 mm, with PTFE screw cap.

FDA conform

Capacity ml	Height mm	O.D. mm	Cat. No.:
10	140	12	A 185-01
15	110	16	A 185-02
20	160	16	A 185-03
50	220	22	A 185-05



### BOLA Test Tubes

Material: <b>PFA</b>	Temperature resistance: <b>from -200°C to +250°C</b>	Chemical resistance: <b>+++ universal</b>	Transparency: <b>transparent</b>	autoclave: <b>121°</b>
-------------------------	---	--	-------------------------------------	---------------------------

Product description:  
Round bottom, transparent, non-porous, wall thickness 1 mm.

FDA conform

Capacity ml	Height mm	O.D. mm	Cat. No.:
10	140	12	A 183-01
15	110	16	A 183-02
20	160	16	A 183-03
25	150	19	A 183-04



### BOLA Centrifuge Tubes

Material: <b>PTFE</b>	Temperature resistance: <b>from -200°C to +250°C</b>	Chemical resistance: <b>+++ universal</b>
--------------------------	---	--

Product description:  
Round bottom.

FDA conform

Capacity ml	Height mm	O.D. mm	Wall thickness mm	Cat. No.:
12	100	16	1	A 193-02
50	100	34	2,5	A 193-04



## BOLA Sampling Bags

Material: <b>PVF</b>	Temperature resistance: <b>from -30°C to +150°C</b>	Chemical resistance: <b>+ good</b>	Transparency: <b>transparent</b>
-------------------------	--	---------------------------------------	-------------------------------------

Product description:

Transparent, non-porous, without plasticisers, with two exchangeable ports made of PTFE.

Capacity l	Length mm	Width mm	Cat. No.:
1,0	150	250	A 223-58
2,0	200	250	A 223-62
5,0	250	350	A 223-70
10,0	350	500	A 223-74

**Applications:**

For the storage of gases or liquids.



## BOLA Connectors for Sampling Bags

Material: <b>PTFE</b>	Temperature resistance: <b>from -200°C to +250°C</b>	Chemical resistance: <b>+++ universal</b>
--------------------------	---	--

Product description:

Connectors to be screwed in the ports of sampling bags.

FDA conform

	Type	O.D. mm	Bore dia. mm	Cat. No.:
<b>A</b>	Connector with tube	6	3	A 226-06
<b>B</b>	Stopcock with tube	6	3	A 226-12



## BOLA Funnels

**BESTSELLER**

Material: <b>PTFE</b>	Temperature resistance: <b>from -200°C to +250°C</b>	Chemical resistance: <b>+++ universal</b>
--------------------------	---	--

Product description:

Conical opening with long outlet.

FDA conform

I.D. inlet mm	O.D. inlet mm	I.D. outlet mm	O.D. outlet mm	Total height mm	Cat. No.:
30	33	4	7	50	H 920-02
50	52	6	10	84	H 920-04
74	78	6	11	116	H 920-06
99	104	10	15	150	H 920-08
152	158	11	18	200	H 920-10



## BOLA Dipper Vessels

Material: PTFE      Temperature resistance: from -200°C to +250°C      Chemical resistance: +++ universal      autoclave: 121°

Product description:

With handle and holes in wall and bottom.

FDA conform

I.D. of vessel mm	O.D. of vessel mm	Depth of vessel mm	Dia. of bores mm	Total height mm	Cat. No.:
35	38	60	6	100	H 1138-08
57	60	100	8	175	H 1138-16
95	100	140	12	230	H 1138-24

**Applications:**

For washing, rinsing or dipping solids in aggressive or pure substances.



## BOLA Dipper Baskets

Material: PFA      Temperature resistance: from -200°C to +250°C      Chemical resistance: +++ universal

Product description:

Non-porous basket with a mesh size of approx. 1,0 x 1,0 mm in the bottom, with fixed stem.

FDA conform

I.D. of vessel mm	O.D. of vessel mm	Depth of vessel mm	Total height mm	Cat. No.:
62	75	19	176	H 997-03

**Applications:**

For washing, rinsing or dipping solids in aggressive or pure substances.



## BOLA Hydrolyzing and Digestion Vessels for Microwave Ovens


Microwave ovens are often used for making quick and easy digestions. The energy of a microwave oven penetrates the material of the vessel almost without any loss. It only heats the liquid within a few seconds over the boiling point.

BOLA Digestion Vessels are made of TFM, a modified PTFE with thermoplastic parts for a homogenous, non-porous surface which avoids contamination and memory effects.

They are available in two versions:

- » Cat. No. A 240-...: consisting of basic vessel, screw cover and mounted sealing and rupture membrane.
- » Cat. No. A 250-...: consisting of basic vessel, screw cover, mounted sealing and rupture membrane and exchangeable liner which allows a more precise weighted sample and different digestions with only one basic vessel.

As soon as the pressure exceeds the maximum limit, the rupture membrane bursts and the released liquid will be drained through an optional tubing (O.D. 6,35 mm / 1/4") into a separately available collecting vessel (Cat. No. A 131-..., see page 216).

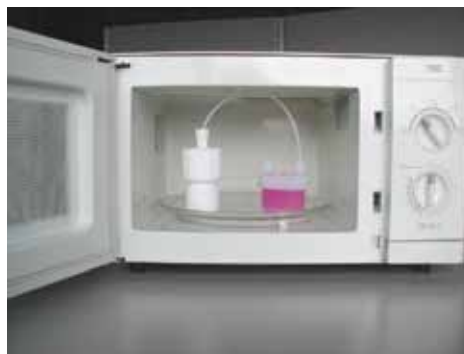

Material:	Temperature resistance:	Chemical resistance:
PTFE, TFM	from -200°C to +250°C	+++ universal

### BOLA Digestion Vessels

Product description:

Dimensionally stable basic vessel and screw cover made of TFM, homogenous, non-porous surface. One set of sealing and rupture membranes already mounted, 10 sets of replacement membranes included in delivery. For samples of up to max. 0.5 g.

FDA conform

Capacity ml	Internal dimensions Ø x Height mm	O.D. of body mm	O.D. of cover mm	Pressure max. bar	Temperature max. C°	Cat. No.:
5	15 x 32	30	40	25	160	A 240-02
10	16 x 52	50	60	25	160	A 240-04
20	22 x 60	50	60	20	150	A 240-06
50	33 x 62	69	95	20	150	A 240-08
100	35 x 110	70	95	15	140	A 240-10

### BOLA Digestion Vessels with Liners

Product description:

Dimensionally stable basic vessel with exchangeable liner and screw cover made of TFM, homogenous, non-porous surface. The liner allows a more precise weighted sample and different digestions with only one basic vessel. One set of sealing and rupture membranes already mounted, 10 sets of replacement membranes included in delivery. For samples of up to max. 0,5 g.

FDA conform

Capacity ml	Internal dimensions Ø x Height mm	O.D. of body mm	O.D. of cover mm	Pressure max. bar	Temperature max. C°	Cat. No.:
10	24 x 63	50	60	25	160	A 250-04
20	30 x 63	50	60	20	150	A 250-06
50	43 x 77	69	95	20	150	A 250-08

### BOLA Liners

Product description:

Liners for digestion vessels (Cat. No. A 250-..., see page 215) made of TFM, homogenous, non-porous surface.

FDA conform

For capacity ml	Weight g	Suitable for Cat. No.:	Cat. No.:
10	48	A 250-04	A 252-04
20	55	A 250-06	A 252-06
50	112	A 250-08	A 252-08



## BOLA Hydrolyzing and Digestion Vessels for Microwave Ovens

### BOLA Sealing and Rupture Membranes

Product description:

One set consisting of 10 sealing membranes made of PFA and 10 rupture membranes made of PTFE, for digestion vessels (Cat. No. A 240-.. and A 250-..., see Page 215)

FDA conform

For capacity ml		Cat. No.:
5		A 244-02
10 and 20		A 244-04
50 and 100		A 244-06



Material: <b>PFA</b>	Temperature resistance: <b>from -200°C to +250°C</b>	Chemical resistance: <b>+++ universal</b>	Pressure: <b>no pressure</b>	Transparency: <b>transparent</b>
-------------------------	---	--	---------------------------------	-------------------------------------

### BOLA Jars with Tubing Connections

Product description:

Collecting vessel for liquids which are released after the burst of sealing and rupture membranes in the digestion vessels. Translucent, non-porous, sturdy design, screw cap with two connections for tubing O.D. 6,35 mm (1/4"). Suitable tubing made of PTFE, FEP or PFA can be found on page 149.

FDA conform

Capacity ml	Total height mm	O.D. mm	I.D. mm	Cat. No.:
120	74	66	60	A 131-12
240	116	66	60	A 131-14








## BOLA Modular System for Reactor Lids

218

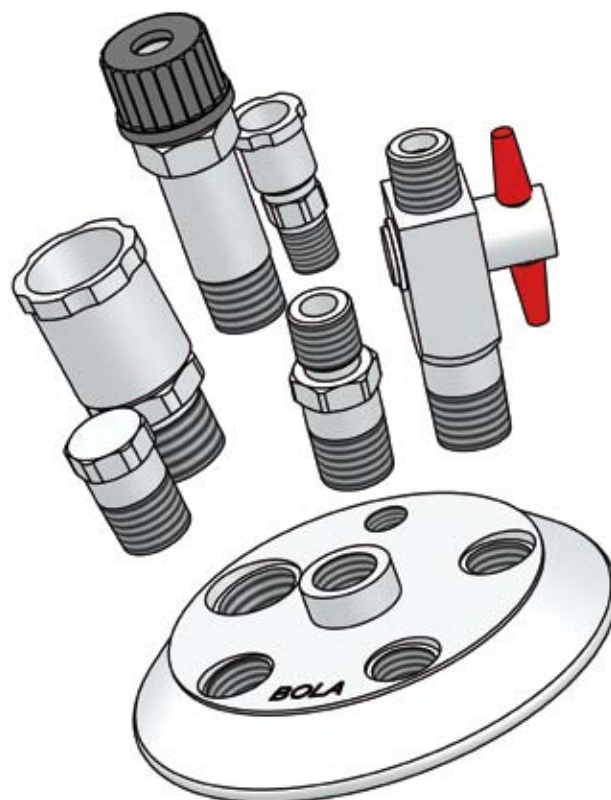

### Worth knowing on the BOLA Modular System for Reactor Lids

For a short-term realisation of projects in Mini plant installations or in the production of small quantities in chemical and pharmaceutical industry and research, special components are required that help to start up existing reactors flexibly. The components should have a very good chemical resistance, a permanent durability and should be easily cleanable at the same time.

All these requirements are met by the BOLA Modular System for Reactor Lids adapted for standard glass reactors with flat flange from SCHOTT® for sizes DN 60, DN 100 and DN 150.

The Modular System consists of Reactor Lids with different screw-in threads as well as different connections for transition to ground joint components, as stirrer bearings, for connection of probes or tubes and tubing, and stoppers, all with NPT screw-in thread.

By means of the screw-in connections, the Reactor Lid can be arranged to the requirements of your application and project. Thus, a lid can be used most versatile and economic.

All Reactor Lids dispose of a centric screw-in thread NPT for connection of a stirrer bearing. The lateral necks, that even dispose of NPT screw-in threads, are arranged round the centric connector. The special clou is that the angles of lateral necks are made for an insertion of probes and tubes aside the centre in order to avoid collisions with the stirrer shaft and further inserted components.

The large choice of different inserts allows to connect existing equipment with ground joint such as Liebig condensers and dropping funnels as well as GL thread such as lead-in for sensors. The already existing equipment can be further used.



### All features at a glance:

- » Easy assembly
- » Flexibly expandable
- » Compatible with glass reactors with SCHOTT®-flat flange
- » Completely made of PTFE, universal chemical resistance
- » With connectors for the use of existing equipment with ground joint or GL thread
- » Also as conductive version made of PTFE-EX (see page 130)

### Selection and Assembly:

- » Choose a lid that fits onto the flange of your glass reactor, as well as the number of connectors needed.
- » Choose the necessary transition fittings according to NPT threads in the chosen lid.
- » Mount the transition fittings into the connectors of the reactor lid. The lid is now ready for service.
- » All fittings can be acquired separately and can be exchanged amongst each other depending on the NPT thread.

### Custom Manufacture – Lid and Fitting

If we do not even have the correct reactor lid in our wide range, we are pleased to offer you a modified reactor lid or modified components accordingly. Just give us a call: +49 (0) 9346 9286-0 or send us a little sketch with the requested component by e-mail to [info@bola.de](mailto:info@bola.de).

#### Example: Reactor Lid DN 100

**A** Moon-Shaped Stirrer Shaft  
Cat. No.: C 376-14  
see page 20


**B** Screw-in Stirrer Bearing  
Cat. No.: B 155-08  
see page 222

**C** Screw-in Connector with  
Ground Joint  
Cat. No.: B 154-02  
see page 223

**D** Laboratory Screw Joint  
Cat. No.: D 631-46  
see page 73

**E** Screw-in Fitting GL  
Cat. No.: B 152-32  
see page 222

**F** PTFE Tubing  
Cat. No.: S 1810-50  
see page 155

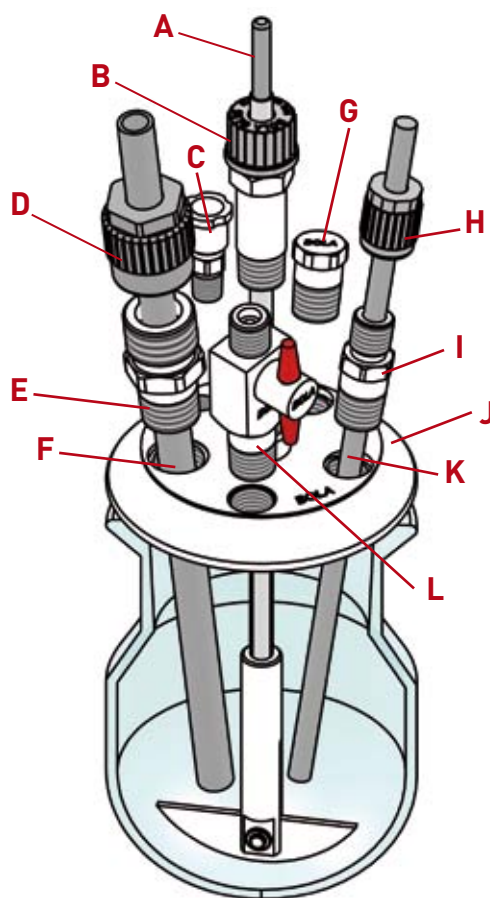

**G** Screw-in Stopper  
Cat. No.: B 153-04  
see page 224

**H** Laboratory Screw Joint  
Cat. No.: D 629-62  
see page 73


**I** Screw-in Fitting GL  
Cat. No.: B 152-18  
see page 222

**J** Reactor Lid DN100  
Cat. No.: B 150-14  
see page 221

**K** Temperature Probe Lemo  
Cat. No.: P 1760-20  
see page 191


**L** Screw-in Stopcock  
Cat. No.: B 156-02  
see page 223

**Thread connections in detail:**

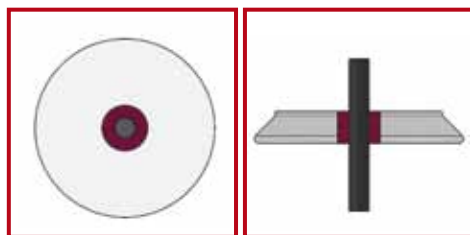


**Centric thread connection (purple):**

For insertion of the stirrer bearing (see page 222)

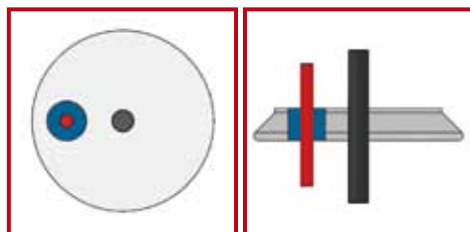


**Vertical thread connection with parallel alignment to the stirrer shaft (blue):**

Components such as probes can be led into the reactor parallel to the stirrer shaft.

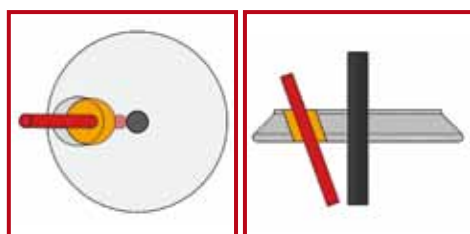

**Inclined thread connection with direction straight to the stirrer shaft (yellow):**

Components such as tubes and tubing can be led directly to the stirrer shaft to achieve an optimal mixing of the medium.

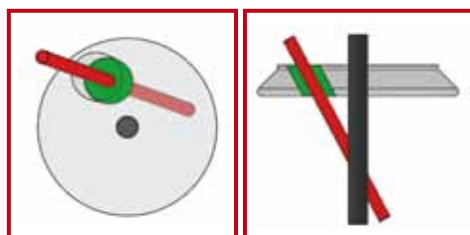

**Inclined thread connection with direction aside the shaft (green):**

Collisions of long components such as temperature probes are avoided as they are led aside the stirrer shaft by means of this thread connection.

**BOLA Reactor Lid DN 60**



Material: PTFE      Temperature resistance: from -200°C to +250°C      Chemical resistance: +++ universal

Product description:

Suitable for glass reactors DN 60 with SCHOTT® flat flange. With screw-in threads for connection of transition fittings and a center neck NPT 1/2".

	<b>1 Connection</b>	<b>2 Connection</b>	<b>3 Connection</b>	<b>Cat. No.:</b>
<b>A</b>	NPT 1/4" connection directly to the shaft	NPT 1/2" connection aside the shaft	NPT 1/2" connection aside the shaft	<b>B 150-02</b>
<b>B</b>	NPT 1/2" connection aside the shaft	NPT 1/2" connection aside the shaft	NPT 1/2" connection aside the shaft	<b>B 150-04</b>

**NEW**  
FDA conform

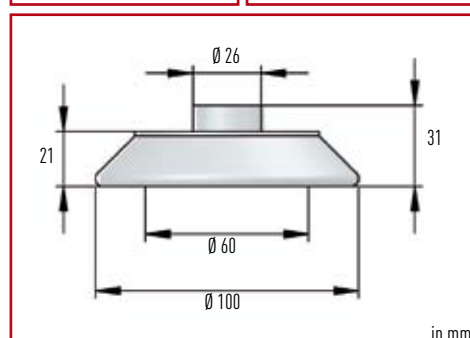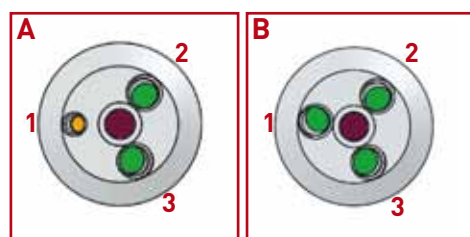

## BOLA Reactor Lid DN 100

Material: PTFE  
 Temperature resistance: from -200°C to +250°C  
 Chemical resistance: +++ universal

Product description:





Suitable for glass reactors DN 100 with SCHOTT® flat flange. With screw-in threads for connection of transition fittings and a center neck NPT 1/2".

**NEW**

FDA conform

	1 Connection	2 Connection	3 Connection	4 Connection	5 Connection	Cat. No.:
<b>A</b>	NPT 1/2" connection aside the shaft	NPT 1/2" connection directly to the shaft	NPT 1/2" connection directly to the shaft	—	—	B 150-12
<b>B</b>	NPT 1/2" connection directly to the shaft	NPT 1/2" connection aside the shaft	NPT 1/2" connection directly to the shaft	NPT 3/4" connection aside the shaft	NPT 1/4" vertical connection	B 150-14
<b>C</b>	NPT 1/2" connection directly to the shaft	NPT 1/2" connection aside the shaft	NPT 1/2" connection directly to the shaft	NPT 1/4" connection aside the shaft	NPT 1/4" vertical connection	B 150-16

Special Request?  
 +49 (0) 93 46-92 86-0

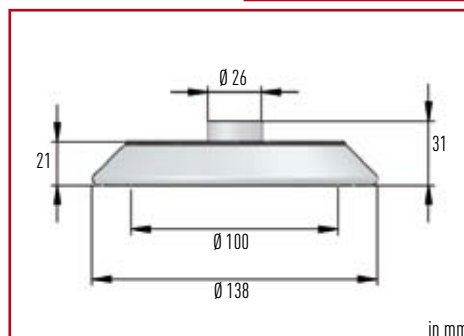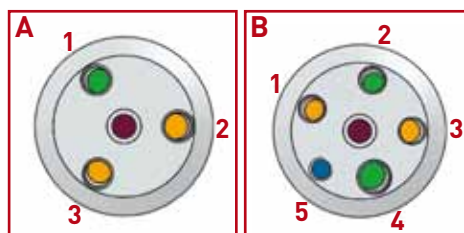

## BOLA Reactor Lid DN 150

Material: PTFE  
 Temperature resistance: from -200°C to +250°C  
 Chemical resistance: +++ universal





Product description:

Suitable for glass reactors DN 150 with SCHOTT® flat flange. With screw-in threads for connection of transition fittings and a center neck NPT 1/2".

**NEW**

FDA conform

	1 Connection	2 Connection	3 Connection	4 Connection	5 Connection	Cat. No.:
<b>A</b>	NPT 1/2" connection directly to the shaft	NPT 1/2" connection aside the shaft	NPT 1/2" connection directly to the shaft	NPT 1/4" connection aside the shaft	NPT 1/4" vertical connection	B 150-22
<b>B</b>	NPT 1/2" connection directly to the shaft	NPT 1/2" connection aside the shaft	NPT 1/2" connection directly to the shaft	NPT 3/4" connection aside the shaft	NPT 1/4" vertical connection	B 150-24
<b>C</b>	NPT 1/2" connection directly to the shaft	NPT 1/2" connection aside the shaft	NPT 1" connection directly to the shaft	NPT 1/4" connection aside the shaft	NPT 1/4" vertical connection	B 150-26

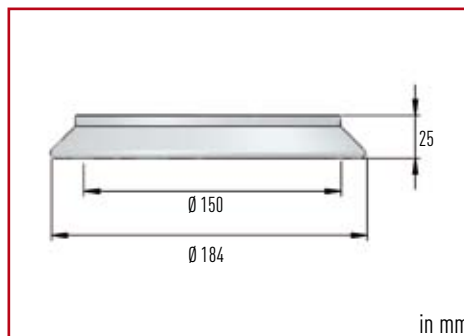

## BOLA Screw-in Stirrer Bearings

Material: PTFE      Temperature resistance: from -200°C to +250°C      Chemical resistance: +++ universal

### Product description:

For centric guidance of stirrer shafts in the center screw-in thread of BOLA Reactor Lids. A special gasket made of PTFE and a FKM o-ring which is compressed by a GL screw cap made of PPS provide a good sealing of the stirrer shaft. With hexagonal gripping surface in standard wrench size. Universal chemical resistance, the medium is only exposed to PTFE.

**NEW**

FDA conform

Screw-in thread NPT (male)	For stirrer shaft dia. mm	Thread of screw cap GL	Wrench size SW	Cat. No.:
1/2"	6	25	25	B 155-06
1/2"	8	25	25	B 155-08
1/2"	10	25	25	B 155-10

### Applications:

For assembly on BOLA Reactor Lids, Cat. No. B 150-... on page 220. Perfect bearing for centric guidance of glass, stainless steel and PTFE-coated stirrer shafts. Suitable spare parts for the stirrer bearing see BOLA Special Gaskets and BOLA Replacement Screw Caps on page 41.



**HELPFUL:** page 130  
Complete Modular System for Reactor Lids in PTFE-EX.

## BOLA Screw-in Fittings GL

Material: PTFE      Temperature resistance: from -200°C to +250°C      Chemical resistance: +++ universal

### Product description:

For connection to BOLA Reactor Lids as GL necks. With hexagonal gripping surface in standard wrench size.

**NEW**

FDA conform

Screw-in thread NPT (male)	Neck GL (male)	Wrench Size SW	Cat. No.:
1/4"	14	15	B 152-14
1/4"	18	15	B 152-16
1/2"	18	22	B 152-18
1/2"	25	22	B 152-20
3/4"	32	32	B 152-32
1"	45	45	B 152-45

### Applications:

For assembly on BOLA Reactor Lids, Cat. No. B 150-... on page 220. For connection of hard-walled tubes, tubing and probes by means of BOLA Laboratory Screw Joints.



## BOLA Screw-in Stopcocks

Material: PTFE  
 Temperature resistance: from 0°C to +110°C  
 Chemical resistance: +++ universal

### Product description:

For connection to screw-in threads on BOLA Reactor Lids to interrupt the flow of connected tubes. Available as two-way stopcock with straight bore and one GL-threaded connection or as three-way stopcock with L-bore and two GL-threaded connections. Cylindrical stopcock plug with grip made of PP for good tightness, stop valve with mark of flow direction. Universal chemical resistance, the flowing product is only exposed to PTFE.

**NEW**

FDA conform

	Screw-in Thread NPT (male)	Type	Bore shape stopcock	Connecting thread GL	Bore dia. mm	Cat. No.:
A	1/2"	2-Way	—	25	6	B 156-02
B	1/2"	3-Way	L	25	6	B 156-08

### Applications:

For assembly on BOLA Reactor Lids, Cat. No. B 150-... on page 220. For inserting liquids and gases. Quick and easy disconnection of flow. Connection of tubing or tubes by means of BOLA Laboratory Screw Joints.



## BOLA Screw-in Connector with Ground Joint

Material: PTFE  
 Temperature resistance: from -200°C to +250°C  
 Chemical resistance: +++ universal

### Product description:

For connection to BOLA Reactor Lids. Connector with ground socket. With hexagonal gripping surface in standard wrench size.

**NEW**

FDA conform

	Screw-in Thread NPT (male)	Ground Socket NS	Wrench Size SW	Cat. No.:
	1/4"	14/23	15	B 154-02
	1/2"	19/26	22	B 154-04
	1/2"	29/32	24	B 154-06
	3/4"	29/32	30	B 154-08
	1"	29/32	34	B 154-10
	1"	45/40	38	B 154-12

### Applications:

For assembly on BOLA Reactor Lids, Cat. No. B 150-... on page 220. For connection to existing components with ground joint such as Liebig Condensers, Dropping Funnels etc.



## BOLA Screw-in Stopper

Material: PTFE  
Temperature resistance: from -200°C to +250°C  
Chemical resistance: +++ universal

### Product description:

For connection to BOLA Reactor Lids. For closure of non-used connectors.  
With hexagonal gripping surface in standard wrench size.

**NEW**

FDA conform

Screw-in thread NPT (male)	Wrench size SW	Cat. No.:
1/4"	15	B 153-02
1/2"	22	B 153-04
3/4"	32	B 153-06
1"	45	B 153-08

### Applications:

For assembly on BOLA Reactor Lids, Cat. No. B 150-... on page 220.



224



## BOLA offers custom manufacture.

Every lab is different. By offering an extensive range of established and sophisticated standard solutions we take into account the varied requirements of the respective branches and sectors.

But maybe you are looking for something special? Something that is not included in our standard product range?

In that case we are able to offer an individual custom manufacture. This is easier and faster than you may expect. Discuss your idea with our professionals. They will give advise and support during design. Finally, your idea will become real: We produce as per your requirements and in compliance with the chosen raw materials – already from 1 piece.

We only need a drawing (a sketch is sufficient) and some further information

### » You have a special request?

Give us a call: +49 (0) 93 46-92 86-0.





## BOLA Flat Flange Distillation Apparatus



### Product description:

Suitable for the distillation of strong alkaline or acid products as well as very aggressive solvents when the resistance of other materials, e.g. glass, is not sufficient. All parts exposed to the medium are either made completely of PTFE/PFA or, like the thermometers, jacketed with PTFE. The distillate in the Liebig Condenser is conducted to the collecting vessel through a PFA pipe.

For heating, we recommend to either use a thermostat or an electric heating mantle. A temperature of +200°C should not be exceeded.

As alternative to the reaction vessel made of PTFE with round bottom, you can also use the reaction vessel made of PFA with flat bottom. It is translucent, non-porous and can be used with a hotplate magnetic stirrer and a PTFE-encapsulated magnetic stirring bar for stirring.

### The Safe-Lab principle:

For security reasons, our distillation apparatus are equipped with the patented Safe-Lab system. This system allows a tight and safe connection as well as an easy disconnection of cone and socket. A special nut which is held on an external thread above the cone holds and locks the socket. For disconnection, this special nut has to be turned clockwise. The power is enforced by the thread pitch and is transferred axially to the socket. The ground joint is released.



## BOLA Flat Flange Distillation Apparatus

Material: PTFE    Material: PFA    Temperature resistance: from -200°C to +250°C    Chemical resistance: +++ universal    Vacuum: suitable

FDA conform

Capacity Cat.No.:	500 ml B 280-03	1.000 ml B 280-06	2.000 ml B 280-09	4.000 ml B 280-12	6.000 ml B 280-15
Total dimensions H x L mm	450 x 600	550 x 700	700 x 750	750 x 980	790 x 1000
Flat Flange Reaction Vessels	NW 100 B 281-03	NW 100 B 281-06	NW 100 B 281-09	NW 150 B 281-12	NW 150 B 281-15
Flat Flange Gaskets	NW 100 B 282-02	NW 100 B 282-02	NW 100 B 282-02	NW 150 B 282-04	NW 150 B 282-04
Flat Flange Lids	NW 100 B 283-02	NW 100 B 283-02	NW 100 B 283-02	NW 150 B 283-04	NW 150 B 283-04
Flat Flange Joining Pieces	NW 100 B 284-02	NW 100 B 284-02	NW 100 B 284-02	NW 150 B 284-04	NW 150 B 284-04
Dropping Funnels with Cone NS 29/32	125 ml B 285-01	125 ml B 285-01	250 ml B 285-02	500 ml B 285-03	500 ml B 285-03
Liebig Condensers	300 mm B 291-02	450 mm B 291-04	450 mm B 291-04	600 mm B 291-06	600 mm B 291-06
Distillation Thermometers 0/+250:1C°	B 290-03	B 290-03	B 290-03	B 290-03	B 290-03
Moon-Shaped Stirrer Shafts	Ø 10 x 350 mm C 376-12	Ø 10 x 450 mm C 376-14	Ø 10 x 510 mm C 376-16	Ø 10 x 600 mm C 376-18	Ø 10 x 600 mm C 376-18
Thermometers for Flask 0/+250:1C°	Ø 7 x 450 mm B 287-03	Ø 7 x 450 mm B 287-03	Ø 7 x 530 mm B 287-06	Ø 7 x 600 mm B 287-09	Ø 7 x 600 mm B 287-09
Thermometer Holders NS 29/32	B 286-03	B 286-03	B 286-03	B 286-03	B 286-03
Stirrer Bearings NS 29/32	B 288-02	B 288-02	B 288-02	B 288-02	B 288-02
Distillation Heads 2x NS 29/32	B 289-03	B 289-03	B 289-03	B 289-03	B 289-03
Receiver Adaptors	B 292-02	B 292-02	B 292-02	B 292-02	B 292-02
Vacuum Stopcocks	B 293-02	B 293-02	B 293-02	B 293-02	B 293-02
Round Bottom Flasks with Ground Joint	100 ml A 158-06	250 ml A 158-08	500 ml A 158-09	500 ml A 158-09	500 ml A 158-09



### Security Advice

Beakers and vessels made of fluoroplastics cannot be heated on a hotplate. Due to overheating, harmful gases can be released. See also page 283 for further advice on the heating of fluoroplastics.



## BOLA Flat Flange Reaction Vessels

Material: <b>PTFE</b>	Temperature resistance: <b>from -200°C to +250°C</b>	Chemical resistance: <b>+++ universal</b>	Vacuum: <b>suitable</b>
--------------------------	---	--	----------------------------

Product description:

Round bottom, thick wall, smooth interior surface. Can be heated by a thermostat or an electric heating mantle.

FDA conform

Capacity ml	Flange NW	O.D. of vessel mm	Total height mm	Cat. No.:
500	100	110	120	<b>B 281-03</b>
1.000	100	110	205	<b>B 281-06</b>
2.000	100	140	270	<b>B 281-09</b>
4.000	150	200	290	<b>B 281-12</b>
6.000	150	215	320	<b>B 281-15</b>



## BOLA Flat Flange Reaction Vessels

Material: <b>PFA</b>	Temperature resistance: <b>from -200°C to +250°C</b>	Chemical resistance: <b>+++ universal</b>	Transparency: <b>transparent</b>
-------------------------	---	--	-------------------------------------

Product description:

Flat bottom, translucent, non-porous, big opening. Can be heated by thermostats or an electric heating mantle or can be used with a heatable magnetic stirrer and a PTFE-encapsulated magnetic stirring bar for stirring.

FDA conform

Capacity ml	Flange NW	O.D. of vessel mm	Total height mm	Cat. No.:
2.400	170/146	150	150	<b>B 320-01</b>



## BOLA Flat Flange Lids

Material: <b>PTFE</b>	Temperature resistance: <b>from -200°C to +250°C</b>	Chemical resistance: <b>+++ universal</b>
--------------------------	---	--

Product description:

One-piece, 3 declined lateral ground joint necks size 29 angled 15°.

FDA conform

For flange NW	Center neck NS	Cat. No.:
100	29/32	<b>B 283-02</b>
150	29/32	<b>B 283-04</b>
170/146	29/32	<b>B 322-01</b>



## BOLA Flat Flange Gaskets

Material: <b>PTFE</b>	Temperature resistance: <b>from -60°C to +230°C</b>	Chemical resistance: <b>+++ universal</b>	Vacuum: <b>suitable</b>
--------------------------	--	--	----------------------------

Product description:

Gasket with silicone inlet (thickness 0,5 mm). Universal chemical resistance, since the product is only exposed to PTFE.

FDA conform

For flange NW	Cat. No.:
100	<b>B 282-02</b>
150	<b>B 282-04</b>
170/146	<b>B 321-01</b>



## BOLA Flat Flange Joining Pieces

Material:  
stainless steel

Product description:

Made of stainless steel, connection between reaction vessel and lid. Locked by stainless steel screws with spring element and screw nuts.

For flange NW	Number of screws	Cat. No.:
100	6	B 284-02
150	6	B 284-04



## BOLA Flat Flange Joining Pieces

Material:  
Aluminium

Product description:

Made of aluminium, connection between reaction vessel and lid. Locked by zinc-plated steel screws.

For flange NW	Number of screws	Cat. No.:
170/146	8	B 323-01



## BOLA Dropping Funnels

Material: PTFE, FEP    Temperature resistance: from 0°C to +110°C    Chemical resistance: +++ universal    Transparency: transparent

Product description:

Dropping funnel made of transparent FEP, fine adjustment stopcock with cone size 29 made of PTFE. Integrated special nut (Safe-Lab) for easy locking and unlocking of the ground joint.

FDA conform

Capacity ml	Cat. No.:
125	B 285-01
250	B 285-02
500	B 285-03



## BOLA Liebig Condensers "Transparent"

Material: PTFE, PFA    Temperature resistance: from -20°C to +110°C    Chemical resistance: +++ universal    Transparency: transparent

Product description:

Thin-walled cooling tube made of translucent and gastight PFA, cooling jacket made of borosilicate glass with hose connectors made of PP and nuts for connection of cooling water, ground joint cone and socket size 29 made of PTFE. The distillate is only exposed to PFA/PTFE. Integrated special nut (Safe-Lab) for easy locking and unlocking of the ground joint.

FDA conform

Length mm	Cat. No.:
300	B 291-02
450	B 291-04
600	B 291-06



## BOLA Liebig Condensers "Vacuum"

Material:	Temperature resistance:	Chemical resistance:	Vacuum:
PTFE	from -20°C to +250°C	+++ universal	suitable

**Product description:**

One-piece cooling tube with ground joint socket and cone size 29 made of PTFE, cooling jacket made of borosilicate glass with hose connectors made of PP and nuts for connection of cooling water. The distillate is only exposed to PFA/PTFE. Integrated special nut (Safe-Lab) for easy locking and unlocking of the ground joint.

FDA conform

Length mm	Cat. No.:
300	B 295-02
450	B 295-04
600	B 295-06



## BOLA Liebig Condensers "Vertical"

Material:	Temperature resistance:	Chemical resistance:	Transparency:
PFA	from -20°C to +250°C	+++ universal	transparent

**Product description:**

Thin-walled cooling tube made of translucent and gastight PFA, cooling jacket made of borosilicate glass with hose connectors made of PP and nuts for connection of cooling water, ground joint cone and socket size 29 made of PTFE. The distillate is only exposed to PFA/PTFE. Suitable for vertical assembly. Integrated special nut (Safe-Lab) for easy locking and unlocking of the ground joint.

FDA conform

Length mm	Cat. No.:
300	B 301-02
450	B 301-04



## BOLA Distillation Thermometers

Material:	Temperature resistance:	Chemical resistance:
PTFE	from 0°C to +250°C	+++ universal

**Product description:**

PTFE-jacketed glass thermometer, justified to an immersion depth of 50 mm. Length 300 mm, measuring range 0/+250: 1°C.

FDA conform

For reaction vessel ml	O.D. mm	Cat. No.:
500-6.000	7,5	B 290-03



## BOLA Thermometers for Flasks

Material: PTFE  
 Temperature resistance: from 0°C to +250°C  
 Chemical resistance: +++ universal

Product description:

PTFE-jacketed glass thermometer, measuring range 0/+250: 1°C

FDA conform

For reaction vessel ml	Measuring range C°	O.D. mm	Length mm	Cat. No.:
500	0 / +250:1	7	450	B 287-03
1.000	0 / +250:1	7	530	B 287-06
2.000-6.000	0 / +250:1	7	600	B 287-09



## BOLA Temperature Probes

Material: PTFE  
 Temperature resistance: from -200°C to +250°C  
 Chemical resistance: +++ universal  
 Temperature range: from -50°C to +250°C

Product description:

One measuring sensor PT 100 in a PTFE-encapsulated stainless steel tube (1.4571). Temperature probe Ø 8mm, tip Ø 6mm, collar ring Ø 12mm. Connection is made either directly to the white PFA-coated cable (length: 1,5m, 4 strands) or alternatively to a coupling type Lemo® socket size 1, 4-wire-system.

FDA conform

Typical response times:

- » T 50: 7 - 12 s
- » T 90: 14 - 16 s

See page 282 for detailed explanation.

	Usable length mm	Total length mm ca.	Connection type	Cat. No.:
<b>A</b>	200	260	Lemo® socket, 4-wire-system	P 1760-15
	300	360	Lemo® socket, 4-wire-system	P 1760-20
	500	560	Lemo® socket, 4-wire-system	P 1760-25
	600	660	Lemo® socket, 4-wire-system	P 1760-30
<b>B</b>	200	260	strands, 4-wire-system	P 1750-15
	300	360	strands, 4-wire-system	P 1750-20
	500	560	strands, 4-wire-system	P 1750-25
	600	660	strands, 4-wire-system	P 1750-30

Applications:

- » temperature measurement in aggressive liquids
- » cable provides flexible connection from measuring device to medium



OTHER SIZES: see page 185  
 PT 100 temperature probes in  
 different versions and sizes.

## BOLA Thermometer Holders

Material: <b>PTFE</b>	Temperature resistance: <b>from -20°C to +230°C</b>	Chemical resistance: <b>+++ universal</b>
--------------------------	--	--

Product description:  
A flexible gasket made of PTFE/silicone holds all thermometers with an O.D. of 7-8 mm. Integrated special nut (Safe-Lab) for easy locking and unlocking of the ground joint. The product is only exposed to PTFE.

FDA conform

Ground joint NS	For diameter mm	Angle	Cat. No.:
29/32	7 - 8	7 °	B 286-03



### Thermometer Holders

» The inclined bore inside prevents collisions with the stirrer shaft in a reactor. The thermometer can be adjusted and fixed in the defined angle. Clever! «



Dieter Waldhaus » Merck KGaA

## BOLA Stirrer Bearings

Material: <b>PTFE</b>	Temperature resistance: <b>from -20°C to +250°C</b>	Chemical resistance: <b>+++ universal</b>
--------------------------	--	--

Product description:  
Guiding the stirrer shaft. With adjustable special gasket. Integrated special nut (Safe-Lab) for easy locking and unlocking of the ground joint.

FDA conform

Cone NS	For stirrer shaft dia. mm	Cat. No.:
29/32	10	B 288-02





## BOLA Moon-Shaped Stirrer Shafts

Material: **PTFE**      Temperature resistance: **from -200°C to +250°C**      Chemical resistance: **+++ universal**

### Product description:

PTFE-jacketed stainless steel shaft, stirrer blade and access for the stirrer shaft completely made of PTFE. Stirrer blade tilts and fits through a ground joint. Further stirrer shafts can be found on page 17.

FDA conform

For reaction vessel ml	For ground joint NS	Dia. of stirrer shaft mm	Length mm	Cat. No.:
500	29/32	10	350	C 376-12
1.000	29/32	10	450	C 376-14
2.000	29/32	10	510	C 376-16
4.000-6.000	29/32	10	600	C 376-18
4.000/6.000	45/40	16	600	C 376-20



## BOLA Distillation Heads

Material: **PTFE**      Temperature resistance: **from -20°C to +230°C**      Chemical resistance: **+++ universal**

### Product description:

Two ground joint cones size 29 and one vertical connection with flexible PTFE/Silicone sealing and PPS screw cap to insert and fix thermometers of an O.D. of 7-8 mm. Integrated special nut (Safe-Lab) for easy locking and unlocking of the ground joint.

FDA conform

Cone NS	For dia. mm	Angle of vertical cone	Cat. No.:
29/32	7 - 8	90°	B 289-03



## BOLA Receiver Adaptors

Material: **PTFE**      Temperature resistance: **from -200°C to +250°C**      Chemical resistance: **+++ universal**

### Product description:

Ground joint cone and socket size 29, as well as socket size 19 for example for vacuum stopcock (Cat. No. B 293-02 see page 234). Integrated special nut (Safe-Lab) for easy locking and unlocking of the ground joint.

FDA conform

Cone NS	Socket NS	Lateral socket NS	Lateral angle	Cat. No.:
29/32	19/26	29/32	15°	B 292-02



## BOLA Vacuum Stopcocks

Material: PTFE      Temperature resistance: from -0°C to +110°C      Chemical resistance: +++ universal

### Product description:

Ground joint cone size 19, bore diameter 2 mm, connections for tubing O.D. 8 mm. Integrated special nut (Safe-Lab) for easy locking and unlocking of the ground joint.

FDA conform

Cone NS	Bore dia. of stopcock mm	Cat. No.:
19/26	2	B 293-02



## BOLA Links

Material: PTFE      Temperature resistance: from -200°C to +250°C      Chemical resistance: +++ universal

### Product description:

For vertical positioning of the Liebig condenser (e.g. in a lid of a reaction vessel). Integrated special nut (Safe-Lab) for easy locking and unlocking of the ground joint.

FDA conform

Cone NS	Socket NS	Angle	Cat. No.:
29/32	29/32	15°	B 303-02



## BOLA Ground Joint Tube Fittings

Material: PTFE      Temperature resistance: from -200°C to +205°C      Chemical resistance: +++ universal

### Product description:

For connecting tubes, hard-walled tubing, thermometers. The sealing rings on the outside of the cone prevent sticking of the ground joints and improve the sealing. Integrated special nut (Safe-Lab) for easy locking and unlocking of the ground joint.

FDA conform

Cone NS	For tubing I.D. x O.D. mm	Bore dia. mm	Cat. No.:
19/26	4,0 x 6,0	5	B 304-10
29/32	1,6 x 3,2	2	B 304-16
29/32	4,0 x 6,0	8	B 304-20
29/32	6,0 x 8,0	8	B 304-22
29/32	8,0 x 10,0	8	B 304-24



## BOLA Ground Joint Distributors

Material: **PTFE**      Temperature resistance: **from -200°C to +205°C**      Chemical resistance: **+++ universal**

### Product description:

With ground joint cone and socket size 29. All ground joints are connected with a bore dia. of 10 mm. The bore dia. of the cone is 16 mm. Integrated special nut (Safe-Lab) for easy locking and unlocking of the ground joint.

FDA conform

Socket NS	Cone NS	Length x Width x Total height mm	Cat. No.:
2 x 29/32	29/32	113 x 40 x 105	<b>B 302-02</b>
3 x 29/32	29/32	160 x 40 x 105	<b>B 302-04</b>

«      »  
Special Request?  
+49 (0) 93 46-92 86-0



235

## BOLA "Safe-Lab" Nuts

Material: **PTFE-GF**      Temperature resistance: **from -200°C to +205°C**      Chemical resistance: **+++ universal**

### Product description:

Allows a tight and safe connection as well as an easy disconnection of cone and socket. The special nut which is held on an external thread above the cone holds and locks the socket. For disconnection, this special nut has to be turned clockwise. The power is enforced by the thread pitch and is transferred axially to the socket. The ground joint is released.

FDA conform

Suitable for ground joint NS	Cat. No.:
19/26	<b>K 1349-06</b>
29/32	<b>K 1349-10</b>
45/40	<b>K 1349-16</b>



## BOLA Cold Traps

Material: <b>PFA, PTFE</b>	Temperature resistance: <b>from -200°C to +250°C</b>	Chemical resistance: <b>+++ universal</b>	Vacuum: <b>suitable</b>	Transparency: <b>transparent</b>
-------------------------------	---	--	----------------------------	-------------------------------------

### Product description:

Transparent, connecting nut made of PTFE reinforced with glassfibres, head made of PTFE with two threaded necks GL 14 for connection of hard-walled tubing by means of separately available laboratory screw joints (page 71). For soft, flexible tubing we recommend to use GL hose connectors (see page 114).

FDA conform

Collecting capacity ml	O.D. of column mm	Total height mm	Cat. No.:
320	60	400	<b>B 317-60</b>



## BOLA Bottles Distillation Apparatus

Material: <b>PTFE, PFA</b>	Temperature resistance: <b>from -20°C to +250°C</b>	Chemical resistance: <b>+++ universal</b>	Pressure: <b>no pressure</b>
-------------------------------	--	--	---------------------------------

### Product description:

Transparent, non-porous bottles, pressure compensation by means of 2,5µm PTFE filtering membrane. Possibility to connect temperature probes or tubing.

FDA conform

Capacity ml	Thread S	Lateral thread GL	Cat. No.:
250	40	18	<b>B 328-16</b>
500	40	18	<b>B 328-24</b>
1.000	40	18	<b>B 328-32</b>

### Applications:

Quick and easy distillations of small quantities.



## BOLA Threaded Adaptors

Material: <b>PTFE</b>	Temperature resistance: <b>from -200°C to +250°C</b>	Chemical resistance: <b>+++ universal</b>
--------------------------	---	--

### Product description:

Allow the use of BOLA Multiple Distributors for Bottles with female thread GL 45 also on bottles with GL 32, GL 40 and S 40 threads.

FDA conform

Example 1 for Cat. No. H 978-30:

Transition from GL 40 / S 40 to GL 45

Suitable for Merck® bottles with GL 40 thread or for all PFA-, PTFE bottles and jars with thread GL 40 and S 40

Example 2 for Cat. No. H 978-40:

Transition from GL 32 to GL 45

Suitable for bottles with GL 32 thread, e.g. from Duran Group (formerly Schott AG)

	Bottle thread GL / S	Top thread GL	Cat. No.:
<b>A</b>	GL 32	45	<b>H 978-30</b>
<b>B</b>	GL/S 40	45	<b>H 978-40</b>



# Screw Joints for HPLC



237

SCREW JOINTS FOR HPLC

Easy handling, sturdy design and pressure resistance up to 30 bar: also in HPLC applications BOLA Screw Joints are your first choice.

## PRODUCT TIPS



Page 238:  
Distributors for Bottles



Page 242:  
Tubing with Mini Fittings



Page 241:  
Distributors with UNF  
Threads



## BOLA HPLC Distributors for Bottles

They consist of a screw cap made of glass-fibre reinforced PP with GL 45 thread and a movable body with connection ports. All necessary screw joints and gaskets for connecting hard-walled tubing (e.g. PTFE, FEP or PFA, see page 149) up to a maximum diameter of 6 mm are included in delivery and make the HPLC distributors usable immediately.

Tubing up to a diameter of 4 mm can be passed and fixed absolutely tightly at the requested immersion depth.

The distributors with stopcocks allow closing unused ports; the FEP stopcock plug provides a universal chemical resistance.

Because of the stopcocks, it is not possible to pass the tubing. A connection to the bottom of the bottle can still be made by pushing tubing with O.D. of 5 mm or I.D. of 6 mm in or on the port on the lower side of the distributor.

A possible unevenness of the bottle neck is adjusted by an o-ring behind an elastic sealing lip, and the bottle is closed tightly. The product is only exposed to the body of the distributor.

The special feature: the body of the distributor can be turned independently from the screw cap. This means that the completely assembled distributor can be removed and fixed on another bottle without the risk of disarranging the tubing.

### BOLA HPLC Distributors for Bottles

**BESTSELLER**

Material:	Temperature resistance:	Chemical resistance:	autoclave:
PP, Silicone	from 0°C to + 110°C	++ very good	121°

#### Product description:

Green screw cap made of glass-fibre reinforced PP for bottle thread GL 45 and body made of PP. Available either with four ports with screw joints suitable for tubing O.D. 1,6 to 2,0 mm and 2,1 to 4,0 mm or with four ports with screw joints suitable for tubing O.D. 6,0 mm. Plugs for closing unused ports are included in delivery.

FDA conform

Suitable for thread GL	Four ports for tubing O.D. mm	Cat. No.:
45	1,6 - 4,0	D 606-08
45	6,0	D 608-08



## BOLA HPLC Distributors for Bottles with Stopcocks

Material: **PP, Silicone**    Temperature resistance: **from 0°C to + 110°C**    Chemical resistance: **++ very good**    autoclave: **121°**

Product description:

Green screw cap made of glass-fibre reinforced PP for bottle thread GL 45 and body made of PP. With four ports with screw joints suitable for tubing O.D. 1,6 to 2,0 mm and 2,1 to 4,0 mm and four stopcocks with stopcock plugs made of FEP.

FDA conform

Suitable for thread GL	Four ports for tubing O.D. mm	Bore dia. of stopcock mm	Cat. No.:
45	1,6 - 4,0	2,4	D 607-08



239

## BOLA Replacement Parts for HPLC Distributors for Bottles

### BOLA Replacement Nuts

Product description:

Nuts made of PP.

FDA conform

	For tubing O.D. mm	Cat. No.:
<b>A</b>	1,6 - 4,0	D 610-02
	6,0	D 610-04



### BOLA Replacement Sealing Rings

Product description:

Sealing rings made of silicone. Packing unit: 10 pieces

	For tubing O.D. mm	Cat. No.:
<b>B</b>	1,6 - 2,0	D 610-08
	2,1 - 4,0	D 610-12



### Replacement O-Rings

Product description:

O-rings made of FPM. Packing unit: 10 pieces

	For tubing O.D. mm	Cat. No.:
<b>C</b>	6,0	D 610-16

### BOLA Replacement Plugs

Product description:

Plugs made of silicone. Packing unit: 10 pieces

	Cat. No.:
<b>D</b>	D 610-30


### BOLA Extender with Adaptor for Syringe Filters

Product description:

Made of PTFE, with female Luer cone for fixing syringe filters.

FDA conform

A Connection	B O.D. mm	Cat. No.:
Luer cone	3,5	D 610-50

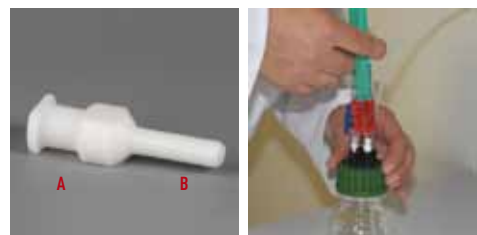

### Applications:

For sterile aeration by means of syringe filters.



## BOLA Screw Joints for HPLC




### What you should know about the BOLA HPLC Screw Joint System

This system is based on flanged tubing and UNF 1/4" 28 G threads. These threads have their origin in the United States and are mainly used in chromatography/HPLC. 1/4" stands for the outer diameter of 6,35 mm. "28 G" stands for 28 thread pitches at the length of one inch (25,4 mm).

Following tubing sizes are mainly used in HPLC:

- » 1/8" (O.D. approx. 3,2 mm x I.D. approx. 1,6 mm)
- » 1/16" (O.D. approx. 1,6 mm x I.D. approx. 0,8 mm)

The screw joint itself consists of a screw (BOLA Tube End Fitting) with washer and flanged tubing. It resists pressures up to 30 bar.

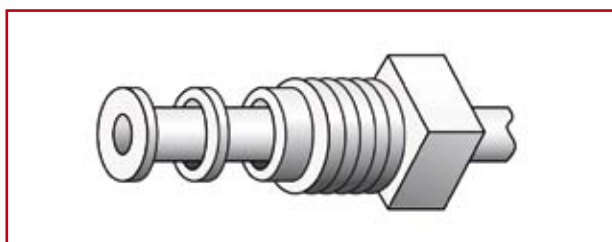

The metal-free washer provides ideal contact pressure of the flanged tubing and prevents small folds during the last phase of tightening the tube end fitting.

The flowing product is only exposed to PTFE – the screw joint has a universal chemical resistance and is absolutely clean.

The PTFE tubing to be flanged must be made of a special type of PTFE. Our tubing fulfils this requirement (see page 250). Besides PTFE tubing, there can also be used FEP and PFA tubing (both gastight and transparent).

The different colours of the tube end fittings (see page 248) can be used for distinction.

### How to flange PTFE tubing

- » cut tubing square
- » clamp tubing by means of tubing holder – overhang approx. 3-5 mm
- » press tubing on flanging tip and preform it
- » press preformed tubing end on cooling plate
- » push fitting and washer on the tubing and tighten the fitting
- » ready



Of course we also have flanged tubing with assembled tube end fittings in different lengths in our standard range (see page 242).

We can also manufacture tubing according to your requirements.

### Don't confuse UNF 1/4" 28 G and M6 threads!

Besides the common UNF threads, there are also M6 threads circulating. These threads are very similar to the UNF thread, but please only use UNF tube end fittings to avoid damage or leakage of your fittings. You can find universal couplings for a transition from UNF 1/4" 28G to M6 on page 246.



## BOLA Distributors for Bottles

**BESTSELLER**

Material: PTFE, PPS  
 Temperature resistance: from -15°C to +200°C  
 Chemical resistance: +++ universal

### Product description:

Black screw cap made of PPS for bottle thread GL 45. Without stopcocks: body made of PTFE with 2 or 4 ports with female thread UNF 1/4" 28 G on upper and lower sides. With stopcocks: body made of PTFE with 2 or 3 ports with female thread UNF 1/4" 28 G on upper and lower sides and stopcock made of FEP for each port. A possible unevenness of the bottle neck is adjusted by an o-ring behind an elastic sealing lip, and the bottle is closed tightly. The product is only exposed to the body of the distributor. The body of the distributor can be turned independently from the screw cap. This means, that the assembled distributor can be removed completely and fixed on another bottle without the risk of disarranging the tubing. Very good chemical resistance, for working temperatures up to +200°C. Suitable flanged tubing can be found on page 242.

FDA conform

	For tubing I.D. x O.D. mm	Bore dia. mm	Connections	Cat. No.:
<b>A</b>	0,8 x 1,6	0,8	2 x UNF 1/4" 28G	F 745-02
<b>B</b>	0,8 x 1,6	0,8	4 x UNF 1/4" 28G	F 745-10

	For tubing I.D. x O.D. mm	Bore dia. mm	Connections	Cat. No.:
<b>A</b>	1,6 x 3,2	1,6	2 x UNF 1/4" 28G	F 745-04
<b>B</b>	1,6 x 3,2	1,6	4 x UNF 1/4" 28G	F 745-12

	For tubing I.D. x O.D. mm	Number of stopcocks	Bore dia. mm	Connections	Cat. No.:
<b>C</b>	0,8 x 1,6	2	0,8	2 x UNF 1/4" 28G	F 746-02
<b>D</b>	0,8 x 1,6	3	0,8	3 x UNF 1/4" 28G	F 746-10

	For tubing I.D. x O.D. mm	Number of stopcocks	Bore dia. mm	Connections	Cat. No.:
<b>C</b>	1,6 x 3,2	2	1,6	2 x UNF 1/4" 28G	F 746-04
<b>D</b>	1,6 x 3,2	3	1,6	3 x UNF 1/4" 28G	F 746-12



Special Request?  
 +49 (0) 93 46-92 86-0

## BOLA Chromatography Adaptors

Material: <b>PTFE, PPS</b>	Temperature resistance: <b>from -15°C to +200°C</b>	Chemical resistance: <b>+++ universal</b>
-------------------------------	--	--

### Product description:

Black screw cap made of PPS with GL thread. Body made of PTFE with one port with female thread UNF 1/4" 28 G for connection of Mini Fittings (see tube end fittings page 248). A possible unevenness of the bottle neck is adjusted by an o-ring behind an elastic sealing lip, and the bottle is closed tightly. The product is only exposed to the body of the adaptor. Very good chemical resistance, for working temperatures up to max. +200°C.

FDA conform

Thread of screw cap GL	For tubing I.D. x O.D. mm	Cat. No.:
14	(1/32" x 1/16") 0,8 x 1,6	F 755-03
18	(1/32" x 1/16") 0,8 x 1,6	F 755-06
25	(1/32" x 1/16") 0,8 x 1,6	F 755-09
32	(1/32" x 1/16") 0,8 x 1,6	F 755-12
45	(1/32" x 1/16") 0,8 x 1,6	F 755-15

Thread of screw cap GL	For tubing I.D. x O.D. mm	Cat. No.:
14	(1/16" x 1/8") 1,6 x 3,2	F 757-03
18	(1/16" x 1/8") 1,6 x 3,2	F 757-06
25	(1/16" x 1/8") 1,6 x 3,2	F 757-09
32	(1/16" x 1/8") 1,6 x 3,2	F 757-12
45	(1/16" x 1/8") 1,6 x 3,2	F 757-15



## BOLA Flanged Tubing

**BESTSELLER**

Material: <b>PTFE, PA</b>	Temperature resistance: <b>from 0°C to +100°C</b>	Chemical resistance: <b>+++ universal</b>	Pressure: <b>30 bar</b>
------------------------------	--	--	----------------------------

### Product description:

Flanged PTFE tubing with black tube end fittings UNF 1/4" 28 G made of PP and washers made of PA. The tubing is ready for use.



FDA conform

Tubing I.D. x O.D. mm	Total length mm	Cat. No.:
(1/32" x 1/16") 0,8 x 1,6	100	F 740-02
(1/32" x 1/16") 0,8 x 1,6	250	F 740-04
(1/32" x 1/16") 0,8 x 1,6	500	F 740-06
(1/32" x 1/16") 0,8 x 1,6	750	F 740-08
(1/32" x 1/16") 0,8 x 1,6	1.000	F 740-10

Tubing I.D. x O.D. mm	Total length mm	Cat. No.:
(1/16" x 1/8") 1,6 x 3,2	100	F 740-20
(1/16" x 1/8") 1,6 x 3,2	250	F 740-22
(1/16" x 1/8") 1,6 x 3,2	500	F 740-24
(1/16" x 1/8") 1,6 x 3,2	750	F 740-26
(1/16" x 1/8") 1,6 x 3,2	1.000	F 740-28

### Applications:

Connection to BOLA Distributors for Bottles or BOLA Chromatography Adaptors.



« »  
Special Request?  
+49 (0) 93 46-92 86-0

## BOLA Miniature Couplings

Material: PTFE, POM  
 Temperature resistance: from -30°C to +100°C  
 Chemical resistance: +++ universal


Product description:

Three types of couplings available: straight type made of PTFE or POM with higher mechanical strength, "T" type with three connections or "cross" type with four connections, all made of PTFE. The tubing is connected by means of tube end fittings (see page 242) to a female thread UNF 1/4" 28 G.

FDA conform

	Type	Material	For tubing I.D x O.D. mm	Connections	Total length mm	Cat. No.:
<b>A</b>	straight	POM	(1/32" x 1/16") 0,8 x 1,6	2	17	F 707-02
<b>B</b>	straight	PTFE	(1/32" x 1/16") 0,8 x 1,6	2	17	F 707-06
<b>C</b>	T	PTFE	(1/32" x 1/16") 0,8 x 1,6	3	25	F 707-14
<b>D</b>	+	PTFE	(1/32" x 1/16") 0,8 x 1,6	4	25	F 707-18

	Type	Material	For tubing I.D x O.D. mm	Connections	Total length mm	Cat. No.:
<b>A</b>	straight	POM	(1/16" x 1/8") 1,6 x 3,2	2	17	F 707-04
<b>B</b>	straight	PTFE	(1/16" x 1/8") 1,6 x 3,2	2	17	F 707-08
<b>C</b>	T	PTFE	(1/16" x 1/8") 1,6 x 3,2	3	25	F 707-16
<b>D</b>	+	PTFE	(1/16" x 1/8") 1,6 x 3,2	4	25	F 707-20

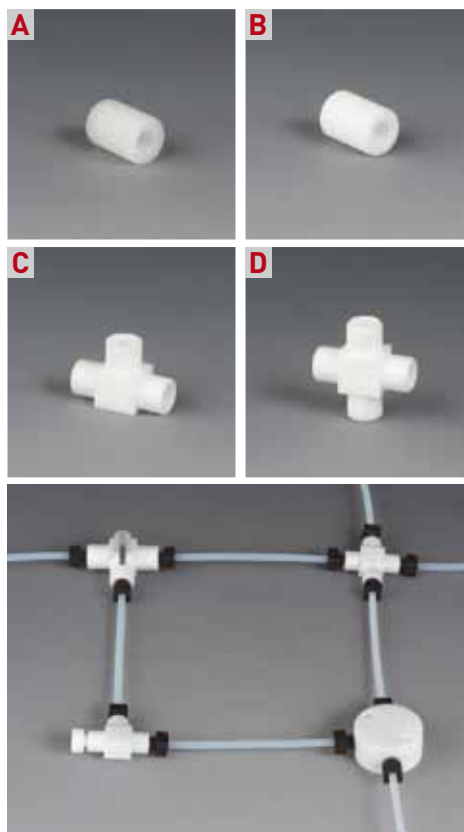

## BOLA Miniature Distributors

Material: PTFE  
 Temperature resistance: from -200°C to +250°C  
 Chemical resistance: +++ universal  
 Pressure: 30 bar


Product description:

Blocks with up to nine connections. The tubing is connected by means of tube end fittings (see page 242) to a female thread UNF 1/4" 28 G. With two mounting holes dia. 3,5 mm for fixing.

FDA conform

	For tubing I.D. x O.D. mm	Connections	O.D. mm	Height mm	Cat. No.:
<b>A</b>	(1/32" x 1/16") 0,8 x 1,6	3	28	15	F 710-01
<b>B</b>	(1/32" x 1/16") 0,8 x 1,6	4	28	15	F 710-05
<b>C</b>	(1/32" x 1/16") 0,8 x 1,6	9	28	36	F 710-09

	For tubing I.D. x O.D. mm	Connections	O.D. mm	Height mm	Cat. No.:
<b>A</b>	(1/16" x 1/8") 1,6 x 3,2	3	28	15	F 710-03
<b>B</b>	(1/16" x 1/8") 1,6 x 3,2	4	28	15	F 710-07
<b>C</b>	(1/16" x 1/8") 1,6 x 3,2	9	28	36	F 710-11

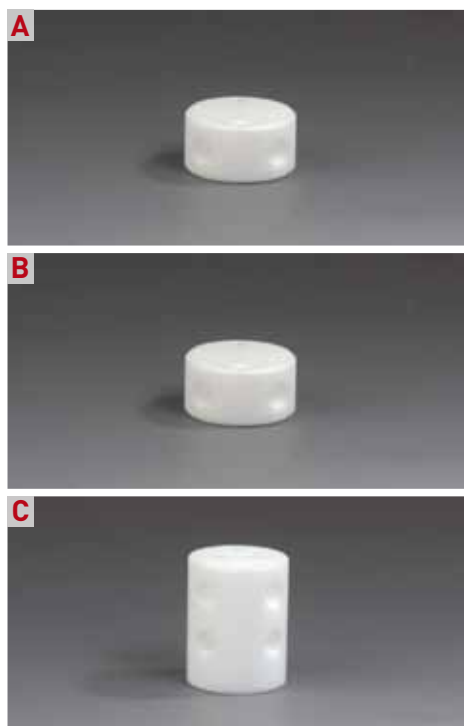

## BOLA Miniature 2-Way Stopcocks

Material: PTFE, FEP    Temperature resistance: from -200°C to +205°C    Chemical resistance: +++ universal    Pressure: 8 bar


Product description:

2-way stopcock with straight bore and two connections. Available either with two female threads UNF 1/4" 28 G or with one female thread UNF 1/4" 28 G and one male thread UNF 1/4" 28 G. Total height including stopcock plug made of FEP: 20 mm.

FDA conform

	For tubing I.D. x O.D. mm	Connections female thread	Connections male thread	Total length mm	Cat. No.:
<b>A</b>	(1/32" x 1/16") 0,8 x 1,6	2		32	F 730-02
<b>B</b>	(1/32" x 1/16") 0,8 x 1,6	1	1	35	F 730-06

	For tubing I.D. x O.D. mm	Connections female thread	Connections male thread	Total length mm	Cat. No.:
<b>A</b>	(1/16" x 1/8") 1,6 x 3,2	2		32	F 730-04
<b>B</b>	(1/16" x 1/8") 1,6 x 3,2	1	1	35	F 730-08

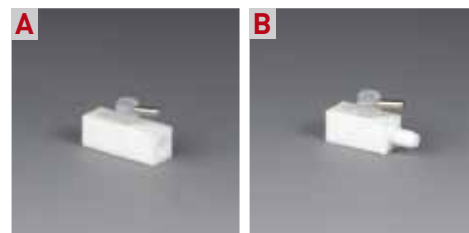

## BOLA Miniature 3-Way Stopcocks

Material: PTFE, FEP    Temperature resistance: from -200°C to +205°C    Chemical resistance: +++ universal    Pressure: 8 bar


Product description:

3-way stopcock with "L"-shaped or "T"-shaped bore and three connections. Available either with three female threads UNF 1/4" 28 G or with two female threads UNF 1/4" 28 G and one male thread UNF 1/4" 28 G. Total height including stopcock plug made of FEP: 20 mm.

FDA conform

	For tubing I.D. x O.D. mm	Connections female thread	Connections male thread	Bore shape of stopcock	Total length mm	Cat. No.:
<b>A</b>	(1/32" x 1/16") 0,8 x 1,6	3		L	32	F 731-02
	(1/32" x 1/16") 0,8 x 1,6	3		T	32	F 731-06
<b>B</b>	(1/32" x 1/16") 0,8 x 1,6	2	1	L	42	F 731-10
	(1/32" x 1/16") 0,8 x 1,6	2	1	T	42	F 731-14

	For tubing I.D. x O.D. mm	Connections female thread	Connections male thread	Bore shape of stopcock	Total length mm	Cat. No.:
<b>A</b>	(1/16" x 1/8") 1,6 x 3,2	3		L	32	F 731-04
	(1/16" x 1/8") 1,6 x 3,2	3		T	32	F 731-08
<b>B</b>	(1/16" x 1/8") 1,6 x 3,2	2	1	L	42	F 731-12
	(1/16" x 1/8") 1,6 x 3,2	2	1	T	42	F 731-16

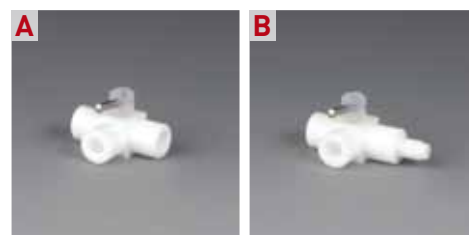

« »  
Special Request?  
+49 (0) 93 46-92 86-0

## BOLA Miniature Manifold Blocks

Material: PTFE, FEP  
 Temperature resistance: from -200°C to +205°C  
 Chemical resistance: +++ universal  
 Pressure: 8 bar

Product description:

Block made of PTFE with one inlet and four outlets with female thread UNF 1/4" 28 G. Also available with four stopcocks with stopcock plugs made of FEP for easy interruption and control of flow. Suitable flanged tubing can be found on page 242.

FDA conform

	For tubing I.D. x O.D. mm	Number of stopcocks	Bore dia. mm	Inlet	Outlet	Cat. No.:
<b>A</b>	(1/32" x 1/16") 0,8 x 1,6		0,8	1	4	F 712-01
<b>B</b>	(1/32" x 1/16") 0,8 x 1,6	4	0,8	1	4	F 712-10

	For tubing I.D. x O.D. mm	Number of stopcocks	Bore dia. mm	Inlet	Outlet	Cat. No.:
<b>A</b>	(1/16" x 1/8") 1,6 x 3,2		1,6	1	4	F 712-03
<b>B</b>	(1/16" x 1/8") 1,6 x 3,2	4	1,6	1	4	F 712-12



## BOLA Miniature Pressure Relief Valves

Material: PTFE, PPS  
 Temperature resistance: from -20°C to +250°C  
 Chemical resistance: +++ universal  
 Pressure: 5 bar

Product description:

Body made of PTFE with two connections with female thread UNF 1/4" 28 G. Valve made of PPS with set screw and lock nut for adjusting and fixing pressure between 0,1 and 5 bar (factory setting 1,5 bar). Suitable flanged tubing can be found on page 242.

FDA conform

	For tubing I.D. x O.D. mm	O.D. mm	Total height mm	Cat. No.:
	(1/32" x 1/16") 0,8 x 1,6	32	50	F 738-08


	For tubing I.D. x O.D. mm	O.D. mm	Total height mm	Cat. No.:
	(1/16" x 1/8") 1,6 x 3,2	32	50	F 738-16

### Product advantages:

- » low dead volume
- » flow direction is marked by an arrow
- » two holes for panel mounting
- » universal chemical resistance, the flowing product is only exposed to PTFE

### Applications:

Pressure control valve with adjustable opening pressure. For preventing pressure drop during filling.

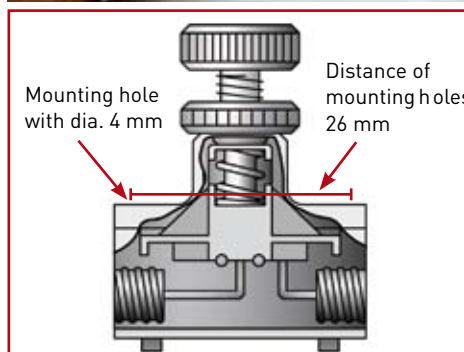

## BOLA Universal Couplings

Material: <b>PTFE</b>	Temperature resistance: <b>from -200°C to +250°C</b>	Chemical resistance: <b>+++ universal</b>
--------------------------	---	--


Product description:

Coupling made of PTFE for transition from M6 thread to UNF 1/4" 28 G thread. The M6 thread is marked by a groove.

FDA conform

	Female thread	Female thread	Bore dia. mm	Cat. No.:
<b>A</b>	M 6	UNF 1/4" 28 G	0,8	<b>F 770-08</b>

	Male thread	Male thread	Bore dia. mm	Cat. No.:
<b>B</b>	M 6	UNF 1/4" 28 G	0,8	<b>F 772-08</b>

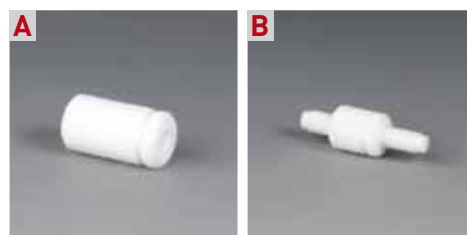

## BOLA Miniature Screw-in Adaptors

Material: <b>PTFE</b>	Temperature resistance: <b>from -200°C to +250°C</b>	Chemical resistance: <b>+++ universal</b>
--------------------------	---	--

Product description:

Adaptor made of PTFE for transition from female thread UNF 1/4" 28 G to male thread NPT 1/8" or NPT 1/4".

FDA conform

	For tubing I.D. x O.D. mm	Female thread	Male thread	Bore dia. mm	Cat. No.:
	(1/32" x 1/16") 0,8 x 1,6	UNF 1/4" 28 G	NPT 1/8"	0,8	<b>F 716-02</b>
	(1/32" x 1/16") 0,8 x 1,6	UNF 1/4" 28 G	NPT 1/4"	0,8	<b>F 716-06</b>

	For tubing I.D. x O.D. mm	Female thread	Male thread	Bore dia. mm	Cat. No.:
	(1/32" x 1/16") 1,6 x 3,2	UNF 1/4" 28 G	NPT 1/8"	1,6	<b>F 716-04</b>
	(1/32" x 1/16") 1,6 x 3,2	UNF 1/4" 28 G	NPT 1/4"	1,6	<b>F 716-08</b>



## BOLA Miniature Luer Connectors

Material: <b>PTFE</b>	Temperature resistance: <b>from -200°C to +250°C</b>	Chemical resistance: <b>+++ universal</b>
--------------------------	---	--


Product description:

Connector made of PTFE for transition from Luer connection to female thread UNF 1/4" 28 G.

FDA conform

	For tubing I.D. x O.D. mm	Female thread	Luer cone	Bore dia. mm	Cat. No.:
<b>A</b>	(1/32" x 1/16") 0,8 x 1,6	UNF 1/4" 28 G	female	1,0	<b>F 717-02</b>
<b>B</b>	(1/32" x 1/16") 0,8 x 1,6	UNF 1/4" 28 G	male	1,0	<b>F 717-06</b>

	For tubing I.D. x O.D. mm	Female thread	Luer cone	Bore dia. mm	Cat. No.:
<b>A</b>	(1/16" x 1/8") 1,6 x 3,2	UNF 1/4" 28 G	female	1,6	<b>F 717-04</b>
<b>B</b>	(1/16" x 1/8") 1,6 x 3,2	UNF 1/4" 28 G	male	1,6	<b>F 717-08</b>

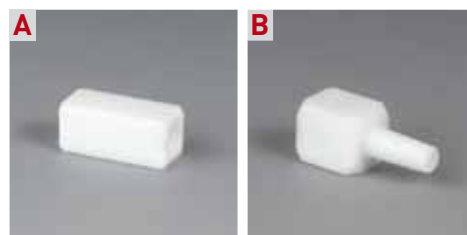

## BOLA Miniature Luer-Lock Connectors

Material: **PTFE**      Temperature resistance: **from -200 °C to +250 °C**      Chemical resistance: **+++ universal**

### Product description:

Connector made of PTFE for transition from Luer Lock connection to female thread UNF 1/4" 28 G.

The inner cone of the Luer-Lock connection provides good sealing, the additional thread (either male or female) prevents accidental loosening.


The tubing is connected by means of tube end fittings (see page 242) to a female thread UNF 1/4" 28 G.

FDA conform

	For tubing I.D. x O.D. mm	Female thread	Luer Lock	Bore dia. mm	Cat.No.:
<b>A</b>	(1/32" x 1/16") 0,8 x 1,6	UNF 1/4" 28 G	female	0,8	F 718-02
<b>B</b>	(1/32" x 1/16") 0,8 x 1,6	UNF 1/4" 28 G	male	0,8	F 718-06
	For tubing I.D. x O.D. mm	Female thread	Luer Lock	Bore dia. mm	Cat.No.:
<b>A</b>	(1/16" x 1/8") 1,6 x 3,2	UNF 1/4" 28 G	female	1,6	F 718-04
<b>B</b>	(1/16" x 1/8") 1,6 x 3,2	UNF 1/4" 28 G	male	1,6	F 718-08

### Applications:

Connection of components with Luer Lock such as syringes or cannulas to a tubing system.

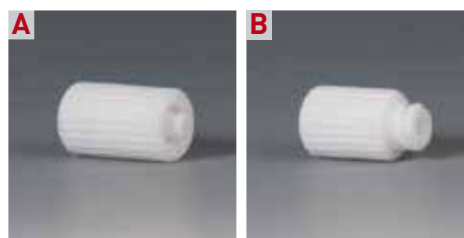

247

SCREW JOINTS FOR HPLC

## BOLA Double Tube End Fittings

Material: **PTFE**      Temperature resistance: **from -200°C to +260°C**      Chemical resistance: **+++ universal**

### Product description:

Made of PTFE, with two male threads UNF 1/4" 28 G. Packing unit: 10 pieces, differing ordering quantities are rounded up to factor 10.

FDA conform

For tubing I.D. x O.D. mm	Colour	Cat. No.:
(1/32" x 1/16") 0,8 x 1,6	white	F 703-02
For tubing I.D. x O.D. mm	Colour	Cat. No.:
(1/16" x 1/8") 1,6 x 3,2	white	F 703-04



## BOLA Tube End Fittings

**BESTSELLER**

Material: <b>PTFE, PA</b>	Temperature resistance: <b>from -40°C to +100°C</b>	Chemical resistance: <b>+++ universal</b>
------------------------------	--	--

**Product description:**

White tube end fittings made of PTFE. With male thread UNF 1/4" 28 G; washers made of PA are included in delivery. Packing unit: 10 pieces, differing ordering quantities are rounded up to factor 10.

FDA conform

For tubing I.D. x O.D. mm	Colour	Cat. No.:
(1/32" x 1/16") 0,8 x 1,6	white	F 702-02
For tubing I.D. x O.D. mm	Colour	Cat. No.:
(1/16" x 1/8") 1,6 x 3,2	white	F 702-04



Material: <b>PP, PA</b>	Temperature resistance: <b>from 0°C to +100°C</b>	Chemical resistance: <b>++ very good</b>
----------------------------	--	---

**Product description:**

Coloured tube end fittings made of PP. With male thread UNF 1/4" 28 G; washers made of PA are included in delivery. Packing unit: 10 pieces, differing ordering quantities are rounded up to factor 10.

FDA conform

For tubing I.D. x O.D. mm	Colour	Cat. No.:
(1/32" x 1/16") 0,8 x 1,6	natural (white)	F 702-06
(1/32" x 1/16") 0,8 x 1,6	black	F 702-10
(1/32" x 1/16") 0,8 x 1,6	red	F 702-18
(1/32" x 1/16") 0,8 x 1,6	orange	F 702-22
(1/32" x 1/16") 0,8 x 1,6	yellow	F 702-26
(1/32" x 1/16") 0,8 x 1,6	green	F 702-30
(1/32" x 1/16") 0,8 x 1,6	blue	F 702-34
(1/32" x 1/16") 0,8 x 1,6	violet	F 702-38
(1/32" x 1/16") 0,8 x 1,6	grey	F 702-42
For tubing I.D. x O.D. mm	Colour	Cat. No.:
(1/16" x 1/8") 1,6 x 3,2	natural (white)	F 702-08
(1/16" x 1/8") 1,6 x 3,2	black	F 702-12
(1/16" x 1/8") 1,6 x 3,2	red	F 702-20
(1/16" x 1/8") 1,6 x 3,2	orange	F 702-24
(1/16" x 1/8") 1,6 x 3,2	yellow	F 702-28
(1/16" x 1/8") 1,6 x 3,2	green	F 702-32
(1/16" x 1/8") 1,6 x 3,2	blue	F 702-36
(1/16" x 1/8") 1,6 x 3,2	violet	F 702-40
(1/16" x 1/8") 1,6 x 3,2	grey	F 702-44



**SUITABLE:** page 250  
Tubing for all screw joints

**Applications:**

Different colours for better distinction.





## BOLA Plugs

Material: **PTFE**      Temperature resistance: **from -200°C to +250°C**      Chemical resistance: **+++ universal**

**Product description:**

Made of PTFE. For closing unused ports of miniature fittings. With male thread UNF 1/4" 28 G. Packing unit: 10 pieces, differing ordering quantities are rounded up to factor 10.

FDA conform

For tubing I.D. x O.D. mm	Colour	Cat. No.:
(1/32" x 1/16") 0,8 x 1,6	white	F 705-02

For tubing I.D. x O.D. mm	Colour	Cat. No.:
(1/16" x 1/8") 1,6 x 3,2	white	F 705-04



## BOLA Washers

Material: **PA**      Temperature resistance: **from -40°C to +100°C**


**Product description:**

Made of PA. For stabilising the flange and avoiding damages when tightening the tube end fitting. Packing unit: 10 pieces, differing ordering quantities are rounded up to factor 10.

FDA conform

For tubing I.D. x O.D. mm	Cat. No.:
(1/32" x 1/16") 0,8 x 1,6	F 728-08

For tubing I.D. x O.D. mm	Cat. No.:
(1/16" x 1/8") 1,6 x 3,2	F 728-16

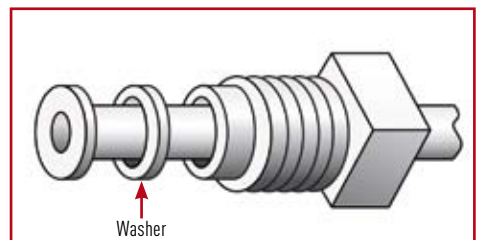

## BOLA Assortments of Tube End Fittings

Material: **PP**      Temperature resistance: **from 0°C to +100°C**      Chemical resistance: **++ very good**

**Product description:**

Tube end fittings made of PP in 9 different colours, two fittings per colour. With male thread UNF 1/4" 28 G; washers made of PA are included in delivery.

Colours: natural, black, orange, yellow, green, blue, violet and grey

FDA conform

Dimensions I.D. x O.D. mm	Cat. No.:
(1/32" x 1/16") 0,8 x 1,6	F 704-02

Dimensions I.D. x O.D. mm	Cat. No.:
(1/16" x 1/8") 1,6 x 3,2	F 704-04

**Applications:**

Different colours for better distinction.



## BOLA Tubing

Product description:


Tubing especially suitable for making flanges with BOLA Thermoelectric Flanging Tool (see page 250).

Choose suitable tubing for your application:

- » PTFE: competitive standard tubing in laboratories, transparent to milky white colour, working temperature range between -200°C and + 250°C, universal chemical resistance
- » PFA: transparent, non-porous and gastight tubing, wide temperature range between -200°C and + 260°C, universal chemical resistance
- » FEP: transparent, non-porous and gastight tubing, working temperature range between -200°C and + 205°C, universal chemical resistance

FDA conform

Dimensions I.D. x O.D. mm	Cat. No.: PTFE -Tubing	Cat. No.: PFA -Tubing	Cat. No.: FEP -Tubing
0,5 x 1,6	S 1810-09		
(1/32" x 1/16") 0,8 x 1,6	S 1810-10	S 1811-02	S 1815-04
1,6 x 2,4	S 1810-24		
(1/16" x 1/8") 1,6 x 3,2	S 1810-26	S 1811-04	S 1815-08
2,4 x 3,2	S 1810-33		

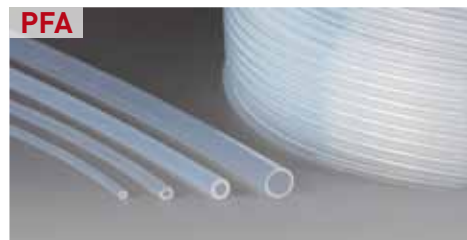

## BOLA Thermoelectric Flanging Tools

Product description:

For making flanges at the ends of plastic tubing (e.g. PTFE, PFA or FEP see page 250)

CE

Following sets are available:	For tubing I.D. mm	Version	Cat. No.:
1 x Basic flanging tool 230V/50 Hz 1 x Exchangeable flanging tip for flanging tubing I.D. 0,8 mm 1 x Tubing holder for tubing O.D. 1,6 mm (1/16") and 3,2 mm (1/8")	0,8	230 V 50 HZ	F 701-12
1 x Basic flanging tool 230V/50 Hz 1 x Exchangeable flanging tip for flanging tubing I.D. 1,6 mm 1 x Tubing holder for tubing O.D. 1,6 mm (1/16") and 3,2 mm (1/8")	1,6	230 V 50 HZ	F 701-14



## BOLA Tubing Holders

Product description:

For tubing with O.D. 1,6 mm (1/16") and 3,2 mm (1/8").

For tubing O.D. mm		Cat. No.:
(1/16") 1,6 and (1/8") 3,2		F 706-06

**Product advantages:**

- » safe fixing of the tubing during the flanging procedure
- » easy assembly and handling
- » injuries due to the hot flanging tips are avoided



## BOLA Flanging Tips

Product description:

For flanging different inner diameters of tubing, suitable for BOLA Thermo-electric Flanging Tools see page 250.

For tubing I.D. mm		Cat. No.:
0,5		F 709-50
(1/32") 0,8		F 709-52
(1/16") 1,6		F 709-54
2,4		F 709-56



## BOLA Standard Construction Kits

Product description:

For making flanges at the ends of plastic tubing (e.g. PTFE, PFA or FEP see page 250)



Following sets are available	For tubing I.D. mm	Version	Cat. No.:
1 x BOLA Thermolectric Flanging Tool with exchangeable flanging tip for tubing I.D. 0,8 mm 1 x BOLA Tube End Fitting Set 5 x BOLA Plugs 10 x BOLA Miniature Couplings (straight) 2 x Miniature Couplings (T) 1 x BOLA Miniature Coupling (cross) 1 x 10 metres of PTFE tubing	0,8	230V 50 HZ	F 700-02
1 x BOLA Thermolectric Flanging Tool with exchangeable flanging tip for tubing I.D. 1,6 mm 1 x BOLA Tube End Fitting Set 5 x BOLA Plugs 10 x BOLA Miniature Couplings (straight) 2 x BOLA Miniature Couplings (T) 1 x BOLA Miniature Coupling (cross) 1 x 10 metres of PTFE tubing	1,6	230 V 50 HZ	F 700-04



## BOLA Joining Fittings

Material: <b>PTFE, ETFE</b>	Temperature resistance: <b>from -50°C to +150°C</b>	Chemical resistance: <b>+++ universal</b>	Pressure: <b>5 bar</b>	Vacuum: <b>suitable</b>
--------------------------------	--	--	---------------------------	----------------------------

### Product description:

Fitting made of PTFE. One side with connecting nut with compression rings for connecting tubing or tubes with O.D. 4, 6, 8 or 10 mm. Other side with laboratory screw joint for connecting tubing with O.D. 1,6 or 3,2 mm (see page 250).

FDA conform

From tubing I.D. x O.D. mm	To tubing I.D. x O.D. mm	O.D. mm	Total length mm	Cat. No.:
(1/32" x 1/16") 0,8 x 1,6	4 and 6	25	76	F 762-04
(1/32" x 1/16") 0,8 x 1,6	8 and 10	25	76	F 762-08
From tubing I.D. x O.D. mm	To tubing I.D. x O.D. mm	O.D. mm	Total length mm	Cat. No.:
(1/16" x 1/8") 1,6 x 3,2	4 and 6	25	74	F 762-14
(1/16" x 1/8") 1,6 x 3,2	8 and 10	25	74	F 762-18



**SUITABLE:** page 149  
Tubing for all screw joints



## BOLA offers custom manufacture.

Every lab is different. By offering an extensive range of established and sophisticated standard solutions we take into account the varied requirements of the respective branches and sectors.

But maybe you are looking for something special? Something that is not included in our standard product range?

In that case we are able to offer an individual custom manufacture. This is easier and faster than you may expect. Discuss your idea with our professionals. They will give advise and support during design. Finally, your idea will become real: We produce as per your requirements and in compliance with the chosen raw materials – already from 1 piece.

We only need a drawing (a sketch is sufficient) and some further information

### » You have a special request?

Give us a call: +49 (0) 93 46-92 86-0.

## BOLA Transition Fittings

Material:	Temperature resistance:	Chemical resistance:	Pressure:
PTFE	from -200°C to +250°C	+++ universal	5 bar

Product description:

Fitting made of PTFE. One side with metric thread and connecting nut with compression rings for connecting tubing or tubes with O.D. 4, 6, 8 or 10 mm. Other side with female thread UNF 1/4" 28 G for connecting flanged tubing with O.D. 1,6 or 3,2 mm by means of tube end fittings (see page 242).

FDA conform

From tubing I.D. x O.D. mm	To tubing I.D. x O.D. mm	O.D. mm	Total length mm	Cat. No.:
(1/32" x 1/16") 0,8 x 1,6	4 and 6	21	40	F 760-04
(1/32" x 1/16") 0,8 x 1,6	8 and 10	26	46	F 760-14
From tubing I.D. x O.D. mm	To tubing I.D. x O.D. mm	O.D. mm	Total length mm	Cat. No.:
(1/16" x 1/8") 1,6 x 3,2	4 and 6	21	40	F 760-08
(1/16" x 1/8") 1,6 x 3,2	8 and 10	26	46	F 760-18



## BOLA Vario Couplings

Material:	Temperature resistance	Chemical resistance:	Pressure:	Vacuum:
PVDF	from -30°C to +150°C	++ very good	3 bar	suitable

Product description:

Two-part coupling made of PVDF for connecting elastic tubing (e.g. Viton<sup>®</sup>, Tygon<sup>®</sup>, silicone) to hard-walled tubing made of PTFE, glass or other plastics. Easy and ingenious functioning: the elastic tubing is pushed on a cone and fixed on the coupling by means of a connecting nut. On the other side, the hard-walled tubing is connected as follows:

Flanged PTFE tubing with miniature connectors (e.g. Cat. No. F 740 page 242) is connected to a female thread UNF 1/4" 28 G.


Hard-walled tubing up to a maximum O.D. of 10 mm is connected to a GL thread by means of laboratory screw joints (see page 71). Restricted chemical resistance, working temperatures up to max. +150°C.

FDA conform

	For tubing I.D. mm	For tubing wall thickness mm	Bore dia. mm	Connecting thread UNF	Cat. No.:
<b>A</b>	0,8	0,8 and 1,6	0,8	1/4" 28G	F 778-08
	1,6	0,8 and 1,6	1,6	1/4" 28G	F 778-16
	For tubing I.D. mm	For tubing wall thickness mm	Bore dia. mm	Connecting thread GL	Cat. No.:
<b>B</b>	0,8	0,8 and 1,6	0,8	14	D 681-08
	1,6	0,8 and 1,6	1,6	14	D 681-16
	3,2	1,6	3,2	14	D 681-24
	4,0 and 4,8	1,6	4,0	14	D 681-32
	6,4	1,6	6,4	18	D 681-40
	8 and 9,5	1,6 and 2,4	8,0	18	D 681-48

**Applications:**

Peristaltic pumps.

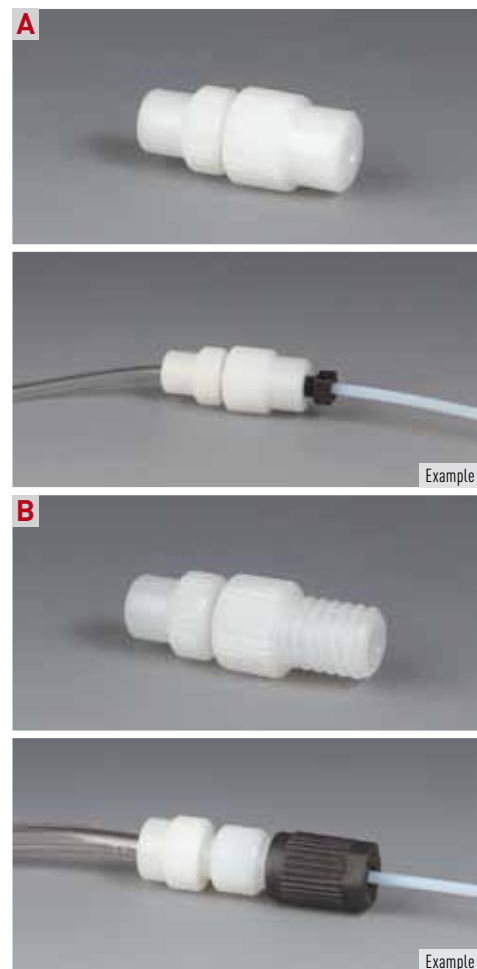

## BOLA GL Transition Fittings

Material:	Temperature resistance	Chemical resistance:
PTFE	from -200°C to +250°C	+++ universal

Product description:

Fitting made of PTFE. One side with thread GL 14 for connecting hard-walled tubing and tubes by means of BOLA Laboratory Screw Joints. Other side with female thread UNF 1/4" 28G for connecting flanged tubing with O. D. 1,6 and 3,2 mm by means of tube end fittings.

FDA conform

For tubing I.D. x O.D. mm	Bore dia. mm	Fitting Thread GL	Female Thread UNF	Total length mm	Cat.No.:
0,8 x 1,6	0,8	14	1/4" 28G	39	F 761-08
1,6 x 3,2	1,6	14	1/4" 28G	39	F 761-16



## BOLA UNF Screw-in Tube Fittings

Material:	Temperature resistance	Chemical resistance:
PTFE	from -200°C to +250°C	+++ universal

Product description:

Straight tube fitting made of PTFE. One side with fitting thread GL 14 for connecting hard-walled tubes and tubing by means of BOLA Laboratory Screw Joints. Other side with male screw-in thread UNF 1/4" 28G for connection to units and fittings with female thread UNF 1/4" 28G.

FDA conform

For tubing I.D. x O.D. mm	Bore dia. mm	Fitting thread GL	Male thread UNF	Total length mm	Cat.-No.
0,8 x 1,6	0,8	14	1/4" 28G	39	F 763-08
1,6 x 3,2	1,6	14	1/4" 28G	39	F 763-16



## BOLA Adaptors for Prominent® Pumps

Material:	Temperature resistance	Chemical resistance:	Pressure:
PTFE	from -200°C to +250°C	+++ universal	10 bar

Product description:

Adaptor made of glass-fibre reinforced PTFE, transition from pump thread M20x1,5 to GL thread. Pressure resistant connection (max. 10 bar) of hard-walled tubing with Prominent® pumps by using BOLA Laboratory Screw Joints. Universal chemical resistance, the product is only exposed to PTFE.

FDA conform

Connecting thread GL	Bore dia. mm	Cat. No.:
[1/32" x 1/16"] - 0,8 x 1,6	0,8	D 731-12
[1/16" x 1/8"] - 1,6 x 3,2	1,6	D 731-24



« »  
Special Request?  
+49 (0) 93 46-92 86-0

## BOLA Connection Bolts

Material: <b>PEEK</b>	Temperature resistance: <b>from -50°C to +250°C</b>	Chemical resistance: <b>++ very good</b>	Pressure: <b>450 bar</b>
--------------------------	--	---	-----------------------------

### Product description:

Connection bolt and sealing cone made of PEEK, suitable for female thread UNF 10-32G. Suitable for pressures up to max. 450 bar.

FDA conform

For tubing/tube O.D. mm	Cat. No.:
(1/16") 1,6	F 830-10



## BOLA Connection Bolts

Material: <b>PEEK</b>	Temperature resistance: <b>from -50°C to +250°C</b>	Chemical resistance: <b>++ very good</b>	Pressure: <b>450 bar</b>
--------------------------	--	---	-----------------------------

### Product description:

Connection bolt and sealing cone made of PEEK, suitable for female thread UNF 10-32 G. Exchangeable sealing cone available separately (Cat. No. F 834-10 on page 255), knurled nut reusable. Suitable for pressures up to max. 280 bar

FDA conform

For tubing/tube O.D. mm	Cat. No.:
(1/16") 1,6	F 833-10



## BOLA Sealing Cones for Connection Bolts

Material: <b>PEEK</b>	Temperature resistance: <b>from -50°C to +250°C</b>	Chemical resistance: <b>++ very good</b>	Pressure: <b>450 bar</b>
--------------------------	--	---	-----------------------------

### Product description:

Replacement sealing cone made of PEEK, suitable for connection bolts Cat. No. F 833-10 on page 255.

FDA conform

For tubing/tube O.D. mm	Cat. No.:
(1/16") 1,6	F 834-10



## BOLA Connection Bolts

Material:	Temperature resistance:	Chemical resistance:	Pressure:
PEEK	from -50°C to +250°C	++ very good	450 bar

### Product description:

Hexagonal connection bolt and double sided sealing cone made of PEEK, suitable for female thread UNF 10-32G. Exchangeable sealing cone available separately (Cat. No. F 837-10 see page 256). Hexagonal nut reuseable. Suitable for pressures of up to max. 400 bar.

FDA conform

For tubing/tube O.D. mm	Cat. No.:
(1/16") 1,6	F 836-10



## BOLA Double Sealing Cones for Connection Bolts

Material:	Temperature resistance:	Chemical resistance:	Pressure:
PEEK	from -50°C to +250°C	++ very good	450 bar

### Product description:

Replacement double sided sealing cone made of PEEK, suitable for connection bolts (Cat. No. F 836-10 see page 256).

FDA conform

For tubing/tube O.D. mm	Cat. No.:
(1/16") 1,6	F 837-10





# Filtration



257

FILTRATION

Proved and tested, durable, optimally resistant against acids, caustic solutions and other aggressive chemicals: our solutions for efficient and safe filtration.

## PRODUCT TIPS



Page 259:  
Cap for Scrubber Bottles



Page 266:  
HPLC Suction Filter



Page 263:  
Vacuum Filters

# BOLA Filtration



### Information about pore sizes – what do these indications mean?

Class	Indication	Pore size in $\mu\text{m}$
00	P 500	250 - 500 *
0	P 250	160 - 250 *
1	P 160	100 - 160 *
2	P 100	40 - 100
3	P 40	16 - 40
4	P 16	10 - 16
5	P 1,6	1 - 1,6

\* not feasible with PTFE at the moment

### What you should know about porous PTFE.

For the production of porous rods, tubes and tiles, PTFE particles are melted together.

The pore size can be determined both by the selection of the PTFE granules and the process parameters.


Due to the non-adhesive surface, filtering devices made of fluoroplastics (PTFE/PFA) are easy to clean and have a long durability.

Microporous PTFE has the same unique properties like "normal" PTFE:

- » non-adhesive / dirt-repellent
- » hydrophobic / water-repellent
- » non-wettable
- » no release of trace elements in the filtrate (no plasticisers)
- » almost universal chemical resistance to acids, bases and solvents
- » excellent temperature resistance between  $-200^{\circ}\text{C}$  and  $+250^{\circ}\text{C}$  (temporarily even  $+300^{\circ}\text{C}$ )
- » autoclavable

### Typical applications – often asked.

Pore size	Application
50 $\mu\text{m}$	Filtration of coarse particles, distribution of gas in liquids
5 $\mu\text{m}$	Filtration of medium-sized particles, laboratory filtration, valve for packings (gas permeable, leak proof)
1 $\mu\text{m}$	Filtration of aqueous solvents, elimination of particles
0,45 $\mu\text{m}$	Prefiltration of aqueous solvents, HPLC solvents, protein solvents and alcohols, sterile filtration of air or other gases
0,2 $\mu\text{m}$	Ultracleaning of organic solvents and alcohols, sterile filtration of air or other gases
0,05 $\mu\text{m}$	Ultracleaning of solvents or gases (virus)

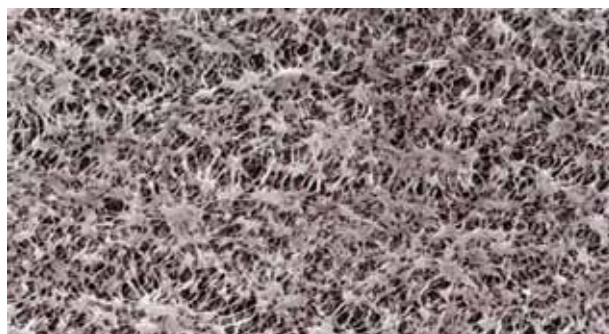

## BOLA Scrubber Adaptors for Bottles

Material: PTFE, PP  
 Chemical resistance: +++ universal  
 autoclave: 121°

### Product description:

Consisting of PTFE body with connecting nut and two lateral GL 18 threaded necks, a FEP inlet tube with a length of 300 mm and a gas distributor with finest bores. Easy in- and outlet of gas by means of hard-walled tubing (e.g. PTFE) which can be connected to the threaded necks by means of BOLA Laboratory Screw Joints (page 71). Elastic tubing can be connected by means of hose connectors (page 114). Inlet tube can be shortened individually.

The special feature: the body of the adaptor can be turned independently from the connecting nut. This means that the completely assembled adaptor can be removed and fixed on another bottle without the risk of disarranging the tubing. Suitable for bottles of Duran Group (formerly Schott, Mainz) with GL 45 and GLS 80 thread and a volume between 100 and 5000 ml.

FDA conform


	For bottle thread	Gas inlet tube mm	Width incl. threaded necks mm	Cat. No.:
<b>A</b>	GL 45	300	76	N 1660-14
<b>B</b>	GLS 80	300	76	N 1660-24

« »  
 Special Request?  
 +49 (0) 93 46-9286-0

### Flow rate:

Using the standard gas distributor and at the stated system pressure.

Cat. No.:	System pressure		
	0,1 bar	0,3 bar	0,6 bar
N 1660-14	150 l/h	325 l/h	465 l/h
N 1660-24	500 l/h	1000 l/h	1500 l/h

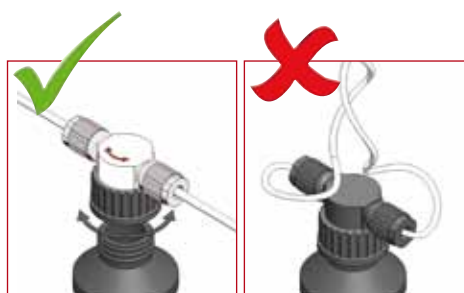

## BOLA INNOVATION

### Scrubber Adaptors for Bottles

Usable for different bottle sizes since the 300 mm FEP tube can be shortened individually. BOLA is offering two versions: suitable for bottle thread GL 45 or GLS 80 (e.g. from Duran Group).



## BOLA Scrubber Bottles Vitrum

Material: PTFE, PP  
 Chemical resistance: +++ universal  
 autoclave: 121°

### Product description:

Consisting of PTFE body with screw cap and two lateral GL 18 threaded necks, suitable bottle made of borosilicate glass as well as a FEP inlet tube and a gas distributor with finest bores. Easy in- and outlet of gas by means of hard-walled tubing (e. g. PTFE) which can be connected to the threaded necks with BOLA Laboratory Screw Joints. Elastic tubing can be connected by means of hose connectors.

The special feature: The body of the distributor can be turned independently from the screw cap. This means that the completely assembled distributor can be removed and fixed on another bottle without the risk of disarranging the tubing.

FDA conform

	Capacity ml	For bottle thread	Necks GL	Total height mm	Cat.No.:
<b>A</b>	500	GL 45	2 x 18	207	<b>N 1662-14</b>
	1.000	GL 45	2 x 18	256	<b>N 1662-24</b>
<b>B</b>	500	GLS 80	2 x 18	186	<b>N 1662-34</b>
	1.000	GLS 80	2 x 18	256	<b>N 1662-44</b>

### Flow rate:

Using the standard gas distributor and at the stated system pressure.

Cat.No.:	System pressure		
	0,1 bar	0,3 bar	0,6 bar
<b>N 1662-14</b>	150 l/h	325 l/h	425 l/h
<b>N 1662-24</b>	150 l/h	325 l/h	425 l/h
<b>N 1662-34</b>	500 l/h	1000 l/h	1500 l/h
<b>N 1662-44</b>	500 l/h	1000 l/h	1500 l/h



## BOLA Gas Distributors

Material: PTFE  
 Temperature resistance: from -200°C to +250°C  
 Chemical resistance: +++ universal

### Product description:

With finest bores (4 x 0,4 mm) for steady sparkling of the flowing gas, only low pressure is necessary. Suitable for scrubber bottles and columns (page 200) with M 8x1 thread and for gas inlet tubes (page 261).

FDA conform

O.D. mm	Height mm	Receiver M	Suitable for Cat. No.:	Cat. No.:
28	24	8 x 1	A 117-.. / A 118-..	<b>N 1501-16</b>



## BOLA Gas Frits


Material: PTFE Temperature resistance: from -200°C to +250°C Chemical resistance: +++ universal

### Product description:

Microporous PTFE with pore size 3 µm for steady sparkling of the flowing gas. Suitable for scrubber bottles and columns (page 200) with M 8x1 thread and for gas inlet tubes (page 261).

FDA conform

O.D. mm	Length mm	Receiver	Suitable for Cat. No.:	Cat. No.:
15	15	M 6 x 1		N 1503-28
25	26	M 8 x 1	A 117-.. / A 118-..	N 1503-32
15	15	Ø 5 mm		N 1503-36
25	26	Ø 7 mm		N 1503-40

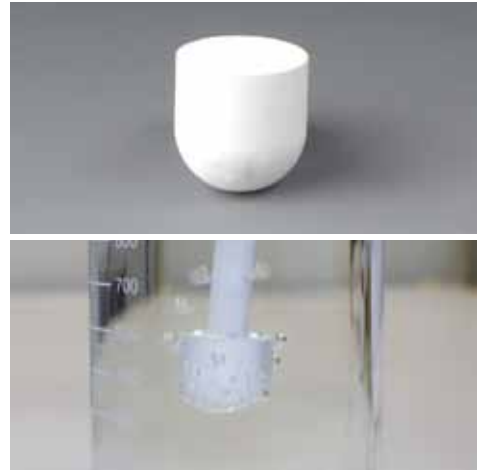

## BOLA Gas Inlet Tubes


Material: PTFE Temperature resistance: from -200°C to +250°C Chemical resistance: +++ universal

### Product description:

For constructing a gas washing equipment. Tube with inner diameter 5 mm, one side with hose connector dia. 9 mm for connecting tubing, other side with thread M 8x1 for connecting a gas frit or a gas distributor.

FDA conform

Length mm	Cat. No.:
200	N 1502-02
400	N 1502-04
600	N 1502-06

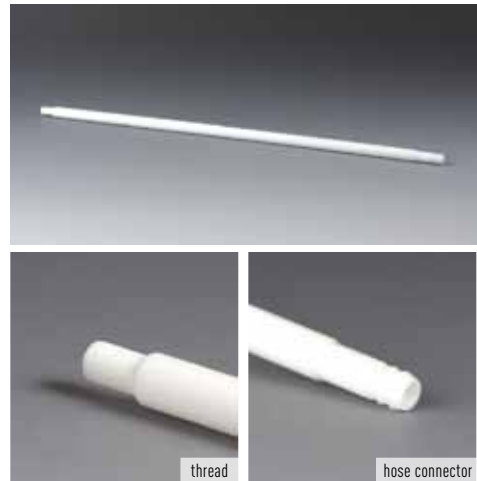

## BOLA Pressure Pre-Filters

Material: PTFE Temperature resistance: from -200°C to +250°C Chemical resistance: +++ universal Pressure: 20 bar autoclave: 121°

### Product description:

For direct fine filtration in front of HPLC columns. For filtering membranes (available optionally – page 267) with a diameter of 13 mm and a thickness between 0,2 µm, filtration surface of 132 mm<sup>2</sup> for filtration with nearly no dead volume. The membrane can be exchanged by hand. Connection threads on both sides UNF 1/4" 28 G, suitable flanged tubing can be found on page 242.

FDA conform

For tubing I.D. mm	For filtering membrane with dia. mm	Cat. No.:
(1/32") 0,8	13	F 780-08
(1/16") 1,6	13	F 780-16



**BESTSELLER****BOLA Flow Filters**

Material: PTFE, PPS    Temperature resistance: from -20°C to +160°C    Chemical resistance: +++ universal    Vacuum: suitable    autoclave: 121°

## Product description:

Suitable for overpressure or vacuum, usable for example as added filter or as large-area in-line apparatus in a line system. Suitable for temperatures up to +160°C. The optionally available filtering membranes (page 267) can be exchanged easily. Tubing can be connected to GL threads by means of the included laboratory screw joints.

The filters are produced without plasticisers and have an almost universal chemical resistance. They do not release any trace elements into the filtrate. Due to the non-adhesive surface, they are easy to clean and can be reused.

FDA conform

For membrane dia. mm	Filtration surface cm <sup>2</sup>	Connecting thread GL	For tubing O.D. mm	Cat. No.:
25	3,1	14	3,2 and 6,0	N 1670-08
47	13,8	18	6,0 and 8,0	N 1670-16
90	52,0	25	8,0 and 10,0	N 1670-24

**Flow rate:**

Flow capacity under vacuum of 100 kPa (1000 mbar) using a PTFE filtering membrane with a thickness of 0,2 mm:

For membrane dia. mm	Pore size µm	Product	Flow ml/min.
25	1,00	water	96
25	1,00	air	12.800
25	0,45	water	11
25	0,45	air	4.600
47	1,00	water	212
47	1,00	air	48.000
47	0,45	water	50
47	0,45	air	28.000
90	1,00	water	648
90	1,00	air	56.400
90	0,45	water	264
90	0,45	air	36.000



## BOLA Vacuum Filters

Material: PTFE, PFA    Temperature resistance: from -200°C to +250°C    Chemical resistance: +++ universal

### Product description:

Filtration unit made of PTFE, multi-stage hose connector with integrated lock screw for connecting vacuum tubing with I.D. 6 mm or 8 mm, PTFE supporting disc to fit optionally available filtering discs (page 267). Collecting vessel made of PFA, filling vessel with lid for protection against contaminations also made of PFA. The filters are produced without plasticisers and have an almost universal chemical resistance. They do not release any trace elements into the filtrate. Due to the non-adhesive surface, they are easy to clean and can be reused.

FDA conform

For membrane dia. mm	Filtration surface cm <sup>2</sup>	Capacity of filling / collecting vessel ml	O.D. mm	Total height mm	Cat. No.:
47	13,8	240	86	250	N 1650-08
47	13,8	500	100	290	N 1650-16
90	55,4	1.000	130	370	N 1650-24

### Flow rate:

Flow capacity for water under vacuum of 100 kPa (1000 mbar) using a PTFE filtering membrane with a thickness of 0,2 mm:

For membrane dia. mm	Pore size µm	Flow ml/min.
47	1,00	510
47	0,45	148
47	0,20	57
90	1,00	1.638
90	0,45	369
90	0,20	121

« »  
Special Request?  
+49 (0) 93 46-92 86-0



SUITABLE: page 267  
Dimensionally coordinated  
filtering membranes

## BOLA Vacuum Filter Funnels

Material: PTFE, PFA    Temperature resistance: from -200°C to +250°C    Chemical resistance: +++ universal    Transparency: transparent    autoclave: 121°

### Product description:

Filtration unit made of PTFE with cone size 29 for connection to a vessel (must be suitable for vacuum) with socket size 29. Multi-stage hose connector with integrated lock screw for vacuum tubing with I.D. 6 and 8 mm, filtration surface 13,8 cm<sup>2</sup>, easily exchangeable filtering membrane dia. 47 mm (optionally available – page 267). Filling vessel made of PFA with PTFE lid for protection against contaminations.

FDA conform

Capacity of filling vessel ml	O.D. mm	Total height mm	Cat. No.:
125	62	188	N 1658-08

### Flow rate:

Flow capacity for water under vacuum of 100 kPa (1000 mbar) using a PTFE filtering membrane with a diameter of 47 mm and a thickness of 0,2 mm:

Pore size µm	Flow ml/min.
1,00	500
0,45	115
0,20	32



## BOLA Vacuum Trap

Material: <b>PP, PBTP</b>	Temperature resistance: <b>from 0 °C to +110 °C</b>	Chemical resistance: <b>++ very good</b>	autoclave: <b>121 °C</b>	Vacuum: <b>suitable</b>
------------------------------	--	---	-----------------------------	----------------------------

Product description:

Consisting of a screw cap red made of PBTP for thread GL 45, distributor body made of PP with 2-step hose connectors for connection of elastic tubing (such as silicone, Viton® or Tygon®) as well as a gas inlet tube made of FEP. With arrow on the top side of the distributor body to display the flow direction. The gas inlet tube can be cut to length on request. Limited chemical resistance, for working temperatures up to max. +110 °C.

**NEW**

FDA conform

2-Step hose connector		Length gas inlet tube mm	Width including necks mm	Cat. No.
O.D. 1	O.D. 2 mm			
9	12	150	80	D 810-05

**Applications:**

Protection of pumps or vacuum systems from damages through vapour or condensate.



Material: <b>PTFE, PPS</b>	Temperature resistance: <b>from -20 °C to +200 °C</b>	Chemical resistance: <b>+++ universal</b>	autoclave: <b>121 °C</b>	Vacuum: <b>suitable</b>
-------------------------------	--	--	-----------------------------	----------------------------

Product description:

Consisting of a screw cap black made of PPS for thread GL 45, distributor body made of PTFE with 2-step hose connectors for connection of elastic tubing (such as silicone, Viton® or Tygon®) as well as a gas inlet tube made of FEP. With arrow on the top side of the distributor body to display the flow direction. The gas inlet tube can be cut to length on request. Universal chemical resistance, for working temperatures up to max. +200 °C.

**NEW**

FDA conform

2-Step hose connector		Length gas inlet tube mm	Width including necks mm	Cat. No.
O.D. 1	O.D. 2 mm			
9	12	150	80	D 810-10

**Applications:**

Protection of pumps or vacuum systems from damages through vapour or condensate.



## BOLA Buchner Funnel

Material: <b>PTFE</b>	Temperature resistance: <b>from -200 °C to +250 °C</b>	Chemical resistance: <b>+++ universal</b>	Vacuum: <b>suitable</b>	autoclave: <b>121°</b>
--------------------------	---	--	----------------------------	---------------------------

Product description:

Made of PTFE. Two-part version demountable in upper and lower part for easy cleaning and removal of filter cake. Suitable for vacuum filtration. Nominal sizes and dimensions as per DIN 12 905. Suitable for commercial filter papers (not included in the scope of delivery). Universal chemical resistance, the medium is only exposed to PTFE.


**NEW**

FDA conform

Nominal size As per DIN 12 905	Volume ml	For filter paper dia. mm	Total height mm	Cat. No.:
45	50	45	94	N 1654-02
55	75	55	117	N 1654-04
70	135	70	142	N 1654-06
90	290	90	165	N 1654-08

**Applications:**

For suspension of solids.

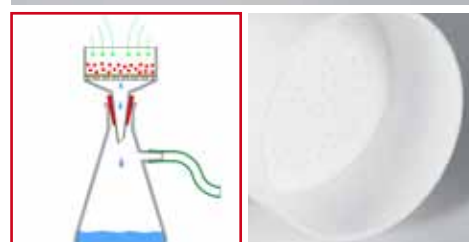



## BOLA Filter Adaptors for Syringes

Material: PTFE	Temperature resistance: from -200°C to +250°C	Chemical resistance: +++ universal	Pressure: 2 bar	autoclave: 121°
-------------------	--	---------------------------------------	--------------------	--------------------

Product description:

Adaptors can be screwed together into multi-stage filters (prefilter, main filter). The low weight of only 14 g or 44 g allows easy exchange of the optionally available filtering membranes (page 267).

FDA conform

For membrane dia. mm	Filtration surface cm <sup>2</sup>	O.D. mm	Total height mm	Cat. No.:
13	0,78	21	35	N 1666-08
25	3,80	34	40	N 1666-16

### Flow rate:

Flow capacity for water under vacuum of 150 kPa (1500 mbar) using a PTFE filtering membrane with a thickness of 0,2 mm:

For membrane dia. mm	Pore size µm	Flow ml/min.
13	1,00	25
13	0,45	10
25	1,00	155
25	0,45	35



Example



## BOLA Three-Stage Flow Filter

Material: PFA	Temperature resistance: from -200°C to +250°C	Chemical resistance: +++ universal	Vacuum: suitable	autoclave: 121°
------------------	--	---------------------------------------	---------------------	--------------------

Product description:

Filter made of PFA with connecting nut made of glass-fibre reinforced ETFE. Suitable for vacuum and overpressure up to max. 150 kPa (1.500 mbar) and for temperatures up to max. +160°C. Multi-stage filtrations with up to 3 different filtering membranes are possible. Easy exchange of the optionally available filtering membrane (page 267). Couplings for connecting tubing (page 155) with O.D. 6,35 mm (1/4") are included.

FDA conform

For membrane dia. mm	For tubing O.D. mm	Filtration surface cm <sup>2</sup>	O.D. mm	Cat. No.:
47	(1/4") 6,35	3 x 14,1	62	N 1682-08

### Flow rate:

Flow capacity under vacuum of 100 kPa (1000 mbar) using a PTFE filtering membrane with a diameter of 47 mm and a thickness of 0,2 mm:

Pore size µm	Product	Flow ml/min.
1,00	water	90
0,45	water	10
1,00	air	27.000
0,45	air	13.200



## BOLA Single-Stage Flow Filter

Material:	Temperature resistance:	Chemical resistance:	Vacuum:	autoclave:
PFA	from -200°C to +250°C	+++ universal	suitable	121°

### Product description:

Filter made of PFA with connecting nut made of glass-fibre reinforced ETFE. Suitable for vacuum and overpressure up to max. 150 kPa (1.500 mbar) and for temperatures up to max. +160°C. Easy exchange of the optionally available filtering membrane (page 267). Couplings for connecting tubing (page 155) with O.D. 6,35 mm (1/4") are included.

FDA conform

For membrane dia. mm	For tubing O.D. mm	Filtration surface cm <sup>2</sup>	O.D. mm	Cat. No.:
47	(1/4") 6,35	14,1	62	N 1678-08

### Flow rate:

Flow capacity under vacuum of 100 kPa (1000 mbar) using a PTFE filtering membrane with a diameter of 47 mm and a thickness of 0,2 mm:

Pore size µm	Product	Flow ml/min.
1,00	water	272
0,45	water	47
1,00	air	21.000
0,45	air	7.000



## BOLA Suction Filters

Material:	Temperature resistance:	Chemical resistance:	autoclave:
PTFE	from -200°C to +250°C	+++ universal	121°

### Product description:

Consisting of a receiver made of PTFE with female thread UNF 1/4" 28 G and an easily exchangeable frit made of porous PTFE (Cat. No. F 766-...). Ideal prefilters in front of pump systems for protecting gaskets, pistons or column packings against premature wearing due to contamination. Suitable flanged tubing can be found on page 242.

FDA conform

Pore size µm	For tubing I.D. mm	Dia. of filter mm	Length of filter cm	Cat. No.:
2	(1/32") 0,8	14	25	F 765-08
2	(1/16") 1,6	14	25	F 765-16
10	(1/32") 0,8	14	25	F 765-48
10	(1/16") 1,6	14	25	F 765-56



## BOLA Frits for Suction Filters

Material:	Temperature resistance:	Chemical resistance:	autoclave:
PTFE	from -200°C to +250°C	+++ universal	121°

### Product description:

Replacement frits made of porous PTFE, suitable for suction filters (Cat. No. F 765-... on page 266).

FDA conform

Pore size µm	Dia. of filter mm	Length of filter cm	Cat. No.:
2	14	20	F 766-08
10	14	20	F 766-48



## BOLA Filtering Membranes

Material: PTFE  
 Temperature resistance: from -200°C to +250°C  
 Chemical resistance: +++ universal

Product description:

Thickness 0,2 mm, packing unit: 10 pieces (see page 93 for further sizes)


FDA conform

Pore size µm	Dia. of membrane mm	Filtration surface mm <sup>2</sup>	Cat. No.:
0,05	13	132	N 1690-08
0,05	25	490	N 1690-28
0,05	47	1.735	N 1690-48
0,20	47	1.735	N 1690-52
0,45	47	1.735	N 1690-56
1,0	47	1.735	N 1690-60
5,0	47	1.735	N 1690-64

### Flow rate:

Flow capacity under vacuum of 100 kPa (1000 mbar) using a PTFE filtering membrane with a diameter of 47 mm and a thickness of 0,2 mm:

Pore size µm	Product	Flow ml/min.
0,20	water	35
0,20	air	740
0,45	water	164
0,45	air	2.300
1,00	water	510
1,00	air	5.330
5,00	water	860
5,00	air	92.300

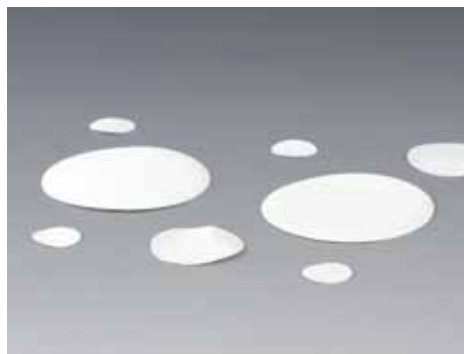

267

FILTRATION

## BOLA Filtering Discs

Material: PTFE  
 Temperature resistance: from -200°C to +250°C  
 Chemical resistance: +++ universal

Product description:

Made of microporous PTFE, thickness 1 mm, packing unit: 10 pieces

FDA conform

Pore size µm	Dia. of membrane mm	Filtration surface mm <sup>2</sup>	Cat. No.:
7	47	1.735	N 1564-10



## BOLA Filtering Tiles


Material: **PTFE**      Temperature resistance: **from -200°C to +250°C**      Chemical resistance: **+++ universal**

Product description:

Made of microporous PTFE, standard tiles with dimensions of 320 x 320 mm for cutting or stamping.

FDA conform

Pore size µm	Thickness mm	Cat. No.:
5	1	N 1610-10
10	1	N 1616-10
10	2	N 1616-20
10	3	N 1616-30

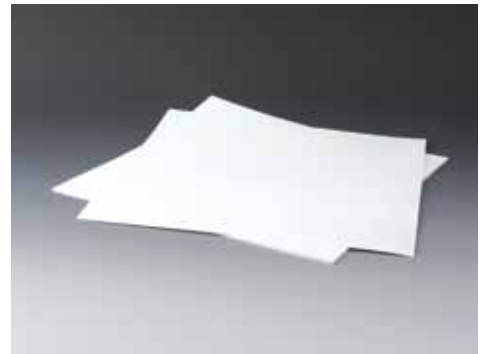

## BOLA Filtering Rods

Material: **PTFE**      Temperature resistance: **from -200°C to +250°C**      Chemical resistance: **+++ universal**

Product description:

Made of microporous PTFE for further treatment and processing. Diameter and length are nominal dimensions and can contain a machining tolerance.

FDA conform

Pore size µm	Dia. of rod mm	Length mm	Cat. No.:
5	28	100	N 1505-28
5	32	120	N 1505-32
10	28	100	N 1510-28
50	28	100	N 1520-28



# Pumps



For versatile use, easy handling, compact:  
BOLA pumps are made to meet almost all requirements in practice and allow safe transfer of liquids.

## PRODUCT TIPS




Page 271:  
Sampling Pump



Page 270:  
Battery-operated Pump

## BOLA BENEFITS

- » powerful – pumping capacity of up to 6 litres per minute free flowing
- » compact construction
- » battery operated and therefore usable anywhere
- » easy handling
- » very light weight (only 500 g including batteries)
- » low-risk pumping
- » also suitable for narrow mouth vessels with ground joint 29/32 or thread GL 45, carboys or barrels

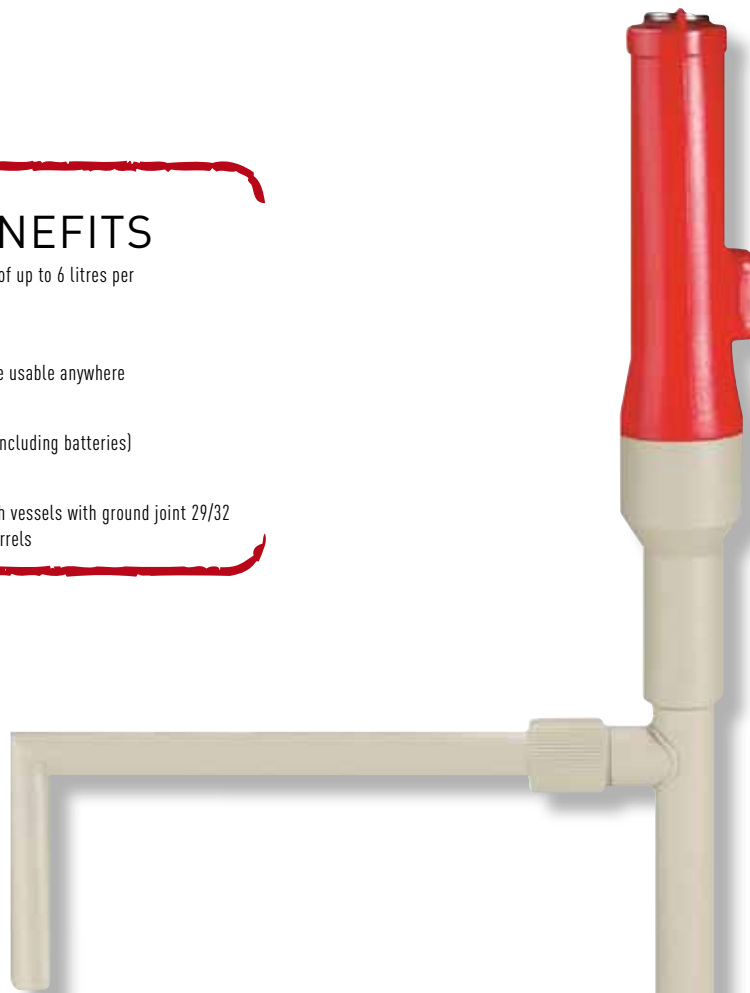

**BESTSELLER**

### BOLA Cordless Pumps for Acids and Caustic Solutions

Material: **PP**      Temperature resistance: **from +5°C to +60°C**      Chemical resistance: **++ very good**

**Product description:**

Made of polypropylene, PTFE, Hastelloy®, driven by two commercial 1,5 V batteries (we recommend the use of rechargeable batteries)

FDA conform

Length of suction pipe mm	Dia. of suction pipe mm	Cat. No.:
400	25	G 870-01
600	25	G 870-11

**Applications:**

For pumping low viscous liquids (e.g. acids, bases etc.)

« »  
Special Request?  
+49 (0) 93 46-92 86-0



For ground joint 29/32



For thread GL 45



## BOLA BENEFITS

- » compact construction
- » usable anywhere (no power or air supply needed)
- » easy handling
- » quick and low-risk pumping of ultrapure liquids
- » no cleaning necessary, only the PTFE tubing gets in contact with the product.
- » volume per stroke 50 ml
- » for tubing O.D. 6 mm, PTFE tubing (length 2 m) included in delivery

### BOLA Sampling Pump

**BESTSELLER**

Material: PTFE	Material: PP	Temperature resistance: from -10°C to +90°C	Chemical resistance: ++ very good
-------------------	-----------------	--	--------------------------------------

**Product description:**


Made of polypropylene and PTFE. A pull on the ball handle produces a slight vacuum in the sampling bottle. Due to this vacuum, the sample is sucked into the sampling bottle. Both glass bottles and plastic bottles with a GL 45 thread can be used as sampling bottles. The pump provides universal chemical resistance since the sample is only exposed to PTFE.

FDA conform

Thread for connection GL	For bottles with a capacity of ml	suction lift of water max. m	Cat. No.:
18	100 - 2.000	4,5	A 124-16

**Applications:**

For pumping liquids from sources that are not easily accessible; also suitable for liquids with a high viscosity, e.g. oils.

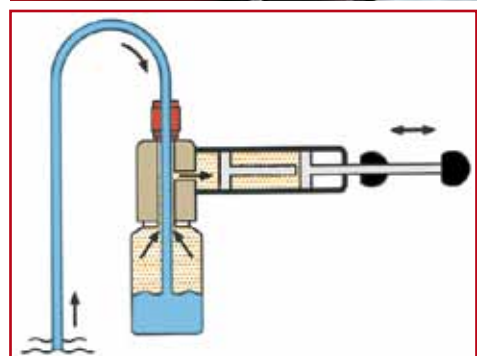

**SUITABLE:** page 149  
Tubing for all screw joints

## BOLA Micro Magnet for Glass Pumps

Material: **PTFE**    Temperature resistance: **from 0°C to +150°C**    Chemical resistance: **+++ universal**    Pressure: **1 bar**

### Product description:


Made of PTFE, the magnet can be adjusted in height by means of the integrated screw. The strong magnet provides good power transmission.

FDA conform

Suitable for DN	Bore dia. mm	O.D. mm	Height mm	Cat. No.:
50	6	36	29	G 876-14

### Applications:

Suitable for all common laboratory glass pumps, e.g. from company NORMAG®.

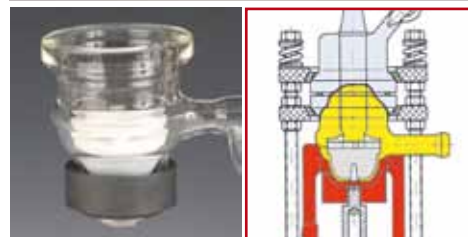

## We build your pump!

Besides the pumps shown on these pages we also construct and produce custom-made pumps. Those pumps are used in a multitude of appliances and plants.



Membrane pump with PTFE bellow piston, compressed-air drive.



Metering unit with inspection glass, sensor mount and compressed-air driven PTFE bellow piston.



## Technical Information



Materials » Chemical resistance » Information about fluoroplastics, stirrer shafts and tubing » Determination of threads

# BOLA Materials

## General information

Fluoroplastics belong to the family of thermoplastics. Due to their high molecular weight, polytetrafluorethylene as well as modified PTFE (PTFE-TFM) cannot be processed with the classic thermoplast methods like injection moulding or extrusion. Both materials are transferred from powder form to semi-finished products by using special press-sintering techniques or the so called paste extrusion. All other fluoropolymers like PFA, FEP, ETFE, ECTFE, PVDF, THV or PVF are processed using the known production methods for thermoplastics.

The fully fluorinated materials PFA and FEP in particular require a corrosion resistant construction of the processing machines. With increasing the content of fluorine, the fluoropolymers offer a better chemical and higher thermal load.

Especially PTFE, PTFE-TFM, PFA and FEP have the following unique properties:

- » almost universal chemical resistance
- » high thermal load capacity (-200 °C up to +250 °C)
- » non-flammable
- » resistant to environmental changes (weather, light)
- » non-adhesive
- » ultra low friction coefficient
- » unbreakable
- » physiologically safe
- » inert, tasteless, odourless
- » UV-resistant
- » not ageing, the properties do not change even during long-term storage
- » without any aggregates like plasticizers or antioxidants
- » unlimited sterilization with steam or ethylene oxide possible. A sterilization using high-energy radiation is not recommended.

All other fluorinated thermoplastics include beside the fully fluorinated monomer block tetrafluorethylene additional, non-fluorinated components. This allows to adapt systematically the properties and thus to facilitate the processing and to enlarge the range of applications.


The chart below gives some general advice on the choice of the best suitable fluoropolymers:

Properties	PTFE	TFM	PFA	FEP	ETFE	THV	PCTFE	ECTFE	PVDF	PVF
Continuous operating temperature (°C)	250	250	250	205	150	110	140	125	120	110
Tear strength (MPa)	30	30	28	25	40	22	31	42	45	30
Permeation (Helium)	-	o	o	o	+	+	+++	++	+++	+++
Sterilisable with $\gamma$ -radiation	-	-	-	-	o	++	o	+	+	+
Chemical resistance	+++	+++	+++	+++	+	o	++	++	o	o

Definition: - not suitable, not recommended  
 o possible, moderate to good  
 + good  
 +++ very good, best choice

## PTFE – Polytetrafluorethylene

Discovered in 1938 by research-chemists of the DuPont (USA) it was not introduced to the market until 1946. A partly crystalline fluoroplastic that belongs to the family of thermoplastics (but not suitable for injection moulding). The strong bond of the fluorine atom to the carbon atom as well as the almost complete shielding of the unbranched carbon chain by fluorine atoms result in a remarkably high chemical and thermal load. PTFE has a thermal resistance ranging from -260 °C up to +250 °C, at short term up to +300 °C (e. g. no brittleness in boiling helium at -269 °C). This temperature range is not reached by any other plastic material. The continuous operating temperature depends on the load. This means that PTFE can be used from -200 °C to +250 °C at moderate mechanical load. PTFE labware has a white appearance and a non-adhesive surface which is easy to clean. Furthermore, this material has excellent slip characteristics. A lubrication of turning steel or glass shafts is not necessary. Semi-finished PTFE rods are fabricated by isostatic pressing processes or extrusion. The final products are produced by machining the semi-finished materials.



### Trade names


3M™ Dyneon™ PTFE  
by Dyneon  
Teflon® by Chemours  
Fluon® by AGC  
Chemicals Europe

## PTFE - TFM

A further development of the classic Polytetrafluorethylene (PTFE) with additional modifier (PPVE). Due to a five times lower molecular weight going along with a lower melting viscosity, the single particles merge to an almost pore-free polymer structure. Compared to PTFE, the tightness as well as the barrier effect at the same wall thickness are doubled. The flowing under pressure load, so-called cold flow, is reduced by factor three. This is particularly advantageous at high working temperatures. PTFE-TFM has an almost universal chemical resistance. Sticking of any contaminations is prevented by an extremely smooth surface. Special methods allow a simple and safe heat seal. This material is ideal for e. g. digestion vessels or gaskets. As a consequence of the excellent barrier function, chemicals cannot penetrate the material. Instruments and components made of PTFE-TFM are therefore especially suitable for frequently changed products.

## FEP – Tetrafluorethylene-Perfluoropropylene

A molten copolymer of tetrafluorethylene and perfluoropropylene with a high-molecular, partly crystalline structure which had been introduced on the market in 1960. Its mechanical and chemical properties are comparable with those of PTFE, however, the upper limit of the permanent working temperature is 50 °C lower (max. +205 °C). FEP is a typical thermoplastic material, which can be processed with the known production methods for this kind of material. New types with lower melting viscosity (= high melt flow index MFR) allow the processing at higher speed. FEP labware is translucent to transparent and non-porous.




### Trade names

Teflon® FEP by Chemours  
Dyneon™ Fluorothermoplastics  
FEP by Dyneon  
Neoflon® by Daikin

## PFA – Perfluoroalkoxy Copolymer

Fluorinated hydrocarbon with a high-molecular, partly crystalline structure. Compared to PTFE, it has additional side chains consisting of perfluorated alkoxy groups. PFA can be processed using thermoplastic production methods and offers chemical and thermal properties equal to those of PTFE. PFA labware is translucent to transparent, non-porous and particularly useful in high-purity work. Big components with a total weight of several kilograms can be fabricated in a „single shot“ by using transfer moulding.

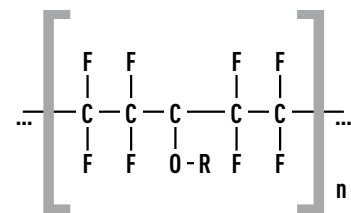


### Trade names

Teflon® PFA by Chemours  
Dyneon™ Fluorothermoplastics  
PFA by Dyneon

# BOLA Materials

## ETFE – Ethylen-Tetrafluorethylene Copolymer

Partly fluorinated ethylene-tetrafluorethylene copolymer. Unlike the high-molecular PTFE which can be processed only by means of pressing or sintering, ETFE can be thermoplastic processed as already described before for PFA and FEP. I. e. this plastic material can be injection moulded or extruded with appropriate machines. In laboratories, this material is mainly used as compound with glass fibres for e. g. screw caps or screw joints. ETFE films have an excellent tear resistance. They are pervious to UV-rays and are therefore used for laboratory green houses as the VIS as well as the UV spectrum of the sun light can pass.




### Trade names

Fluon® ETFE Resins by AGC  
Chemicals Europe  
Tefzel® by Chemours  
Dyneon™ Fluorothermo-  
plastics ETFE by Dyneon

## PVDF – Polyvinylidene Fluoride

A fluoroplastic that can be machined or thermoplastic processed. Characterised by a good to excellent chemical resistance. Unlike PTFE, it is much harder and more rigid but its functional temperature range is lower. Within the range of fluoropolymers, PVDF is the best qualified self-supporting structural material due to its high rigidity. Its advantages over other fluoroplastics are its easy processing, the high mechanical values and the low specific weight. PVDF is mainly used for the production of components used in high-purity water supply systems. It is the only fluorothermoplastic with piezoelectric properties.




### Trade names

Solef® PVDF by Solvay  
Kynar® PVDF by Arkema

## PVF – Polyvinylfluoride

Containing fluorine, it displays a stronger chemical linkage than common polymers and thus a better inherent stability. It shows its unique properties when used at temperatures ranging from -70 °C to +110 °C, whereas temperatures of up to +200 °C can be withstood. Polyvinylfluoride does not contain any softener, is resistant to fading and can be easily cleaned due to its dirt-repelling surface. In particular, foils, films and bags for gas analysis are made of PVF.



### Trade names

Tedlar® Foils by DuPont

## THV – Tetrafluorethylene-Hexafluorpropylene-Vinylidenfluoride Terpolymer

THV consists of the monomers tetrafluorethylene, hexafluorpropylene and vinylidenfluoride. This fluorothermoplastic has properties close to those of elastomers but does not require vulcanization. This material can be thermoplastic processed by injection moulding or extrusion. Due to the low processing temperature of approx. +200 to +250 °C a corrosion resistant construction of the processing machines might not be necessary. In laboratories, THV is mainly used for non-permeating tubing especially for the transport of hydrocarbons, fuel or mineral oils. In the lab and production areas of the semi-conductor and photovoltaic industry, THV is the preferred material for clean-room curtains as well as for blind tiles and cover plates for machines as it is one of few plastic materials which are FM 4910 approved. This standard includes a low inflammability, low build-up of soot of grime while burning in an external flame, low release of toxic products in case of fire.

### Trade names

Dyneon™ Fluorothermo-  
plastics THV by Dyneon

# Standard Plastics – Technical Plastics - High-performance Plastics

## General Information

The permanent operating temperature is the most common characteristic to distinguish between standard plastics, technical plastics and high-performance plastics: for standard plastics, the limit is 90 to max. 100 °C, technical plastics can be operated within a range of 90 up to 150 °C. All high-performance plastics have a permanent operating temperature of more than 150 °C.


The permanent operating temperature is defined as the maximum temperature with which the material can be operated for 20.000 hours but without losing more than 50 % of its original rigidity and ductility. This means, a plastic material having a rigidity of 40 MPa in new condition has to show a rigidity of minimum 20 MPa after having been stored at its maximum permanent operating temperature for 20.000 hours.

277

## Standard-Plastics

### PP – Polypropylene

A polymer of ethylene with isotactic arrangement of methyl groups. It does not belong to the family of fluoroplastics. PP can be autoclaved (at +121 °C) and is distinguished by good mechanical and chemical properties almost up to its softening point. PP labware is unbreakable and an economical alternative with, however, restricted chemical and thermal resistance.




#### Trade names

Norolen® by BASF  
Hostalen® by BASF

### PS – Polystyrene

A polymerisation product of styrene. Polystyrene is one of the most commonly used plastic materials. For many years it has been processed by injection moulding, extruding or blowing. Because of its structure, it belongs to the family of amorphous thermoplastics and is transparent, inflexible and brittle. Polystyrene has a low thermal and chemical resistance. New developed PS-HI types provide an increased impact strength (HI = High Impact).




#### Trade names

Lacqrene® by ATO  
Vestyron® by Innovene  
Edistir® by Montedison

# Technical Plastics

## PA – Polyamides

Condensation polymers obtained either from amino acids respectively from their lactams (e. g. caproic lactam) or diamine and dicarboxylic acid (e. g. adipic acid and hexamethylene-diamine). In general, polyamides are defined according to the number of carbon atoms of their monomers, e. g. PA 6 = polycarbonic lactam or PA 12 = polyauric lactam. PA 6 is the most commonly used polyamide. All polyamides are characterised by high strength and scuff resistance. The application range varies from simple turned parts such as screws or nuts to plain bearings or toothed wheels.

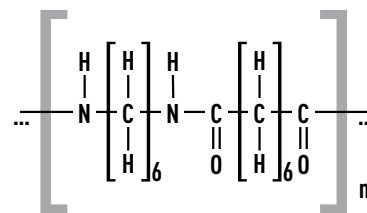


### Trade names

Ultramid® by BASF  
Durethan® by Bayer  
Grilon® by Ems Chemie

## PMMA – Polymethylmethacrylate

An acrylic resin based on methyl methacrylate. It has become generally known under the trade name Plexiglas®. On the one hand, PMMA is approx. 60 times more elastic than window glass but on the other hand it is approx. 10 times more permeable than silicate glass. Of course, the hardness of its surface does not correspond to that of glass but compared with other materials it can be easily polished to high brilliance. As to weight, Polymethylmethacrylate is much more lightweight than normal window glass.




### Trade names

Plexiglas® by Evonik Röhm  
Perspex® by ICI  
Oroglass® by Rohm and Haas

# High-performance Plastics

## PPS – Polyphenylsiloxan

Technical high-performance plastic. This macromolecule consists of phenylene rings and one S-atom which provide a good chemical resistance even at high working temperatures. PPS is particularly suitable for the production of moulded pieces which are exposed to high mechanical and thermal stresses. Injection moulding is the most common processing technology for this material, in addition, single components can be made of semi-finished products by cutting. Special glass-fibre reinforced compounds offer an improved rigidity, sturdiness and dimensional stability under heat compared to non-reinforced compounds.




### Trade names

Fortron® by Celanese  
Ryton® by Phillips  
Petroleum Chemicals  
Alton® by Intern. Polymer Corp.

## PEEK – Polyetheretherketone

Partly crystalline thermoplastic that withstands high temperatures. Due to its unique properties, PEEK is mainly used for high-value and highly stressable components. The high upper working temperature (+250 °C), the good chemical stability and resistance to hydrolysis as well as the high mechanical values of this material will allow PEEK to become the material of the future. PEEK components are commonly used as HPLC fittings, screw joints or as tubing. Its natural colour is brown, its price is considerably higher than that of PTFE or PFA. PEEK is available in many different types, e. g. modified for self-lubricating bearings.

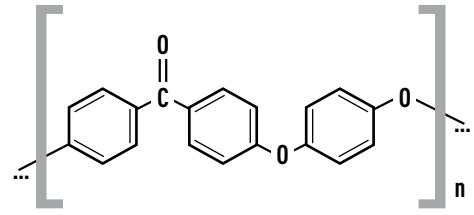

### Trade names

Victrex® by Victrex  
VESTAKEEP® PEEK by Evonik

## Materials - Chemical Resistance

### Please note:

All information in our catalogue is based on current technical knowledge, experience and manufacturers' data. Users should check the suitability of parts and materials described in the catalogue before purchase.

BOLA does not accept any warranty claims as to suitability and fitness of purpose of the materials and products described in this catalogue. Users should avoid making any assumptions on, or interpretation of, the data herein. **Therefore we cannot provide warranty and cannot accept responsibility for any damage.**

Additionally, an overview stating the chemical resistance of all BOLA materials against many different substances from A like Accumulator Acid up to Z link Zinc Nitrates is available for download on our website in pdf-format:

<http://www.bola.de/en/technical-information/bola-materials/material-properties.html>

### Categories of substances

Classes of substances at +20 °C	PTFE	PFA	FEP	ETFE	ECTFE	PVDF	PP	PA	PS	PMMA
Aldehydes	+	+	+	+	+	+	o	o	-	-
Alcohols	+	+	+	+	+	+	+	-	o	o
Amines	+	+	+	+	+	o	o	o	+	-
Bases/Caustic solutions	+	+	+	+	+	+	+	o	o	-
Esters	+	+	+	+	+	o	+	+	-	-
Ether	+	+	+	o	o	o	o	o	-	-
Glycols	+	+	+	+	+	+	+	+	+	o
Ketones	+	+	+	o	o	o	o	+	-	-
Hydrocarbons, aliphatic	+	+	+	+	+	+	o	+	-	-
Hydrocarbons, aromatic	+	+	+	+	+	+	o	+	-	-
Hydrocarbons, halogenated	o	+	+	+	+	+	o	o	-	-
Mineral oils	+	+	+	+	+	+	-	+	+	o
Oxidizing agents, strong	+	+	+	o	o	+	o	-	-	-
Vegetable oils	+	+	+	+	+	+	o	+	+	o
Acids inorganic	+	+	+	o	o	+	+	-	+	o
Acids organic	+	+	+	o	o	+	+	-	o	+
Lubricating oils	+	+	+	+	+	+	+	+	+	+

### Definitions and abbreviations:


- + **Excellent chemical resistance** – continuous exposure for more than 30 days does not cause any damage or only minor damages.
- o **Limited chemical resistance** – depending on the plastic material, a continuous exposure for a longer period of time may cause damages such as cracks, decrease of mechanical strength, discoloration, etc.
- **Poor resistance** – the plastic material can be deformed or destroyed.

# Elastomers

Their main characteristic is their elasticity: Elastomers can easily be stretched and bent and return to their original shape and size after being released. These synthetic materials are most commonly used for o-rings, flat gaskets or resilient elements.


## NBR – Acrylonitrile-Butadiene-Caoutchouc

Elastomer on the base of acrylonitrile-butadiene-caoutchouc which is mainly used as budget-priced sealing material (e. g. O-rings for stop-cocks). This material has a good resistance to mineral oils and fats as well as to HFA, HFB and HFC-hydraulic fluids. It has a very good elasticity. PERBUNAN® (its well-known trade name of BAYER AG) is not resistant to brake fluids on the basis of glycol, HFD liquids, aromatic compounds (e. g. benzol), ester, ketone and amines as well as in concentrated acids and caustic solutions. Due to its restricted chemical resistance, PERBUNAN® is not the ideal material for chemistry.

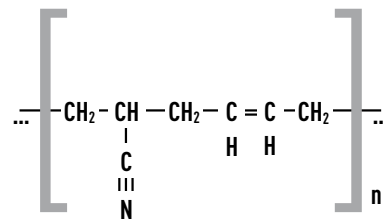


## FKM – Fluorocaoutchouc

Elastomer on the base of fluorocaoutchouc, more familiar as VITON® (DuPont). Many O-rings, lip seals and sleeves are made of FPM. It has a very good resistance to heat, chemicals, weather and ozone. Furthermore, it is resistant to sulphurated mineral oils and fats and to hardly inflammable HFD liquids (basis phosphor ester or chlorinated hydrocarbon). It is not resistant to anhydrous ammonia, caustic soda, potassium, ketones, ether, dioxane, as well as some amines and organic acids. For BOLA products, FPM is mainly used as sealing material, mostly protected from the medium by a PTFE sealing lip.

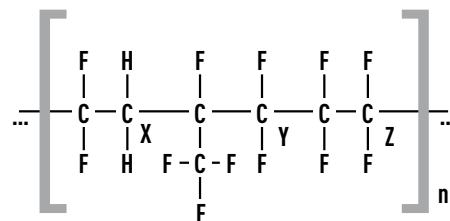


## EPDM

EPDM 3 is an elastomer on the base of ethylene-propylene-diene-caoutchouc which is mostly used for gaskets and O-rings. The main applications are in the area of hot water, steam and suds. It is not resistant to hydraulic fluids on the base of mineral oil but it is weather-proof, non-ageing and resistant to ozone. At BOLA, EPDM O-rings are mainly used for applications where VITON® O-rings are not sufficient.

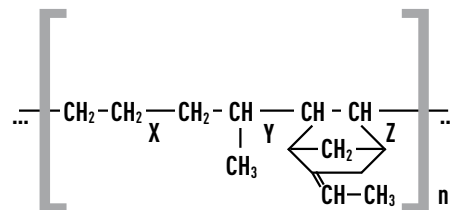

## FFKM – Perfluoro-Caoutchouc

An elastic sealing material with natural recovery and good accommodation to the sealing surfaces and a chemical resistance comparable with PTFE. FFKM O-rings have a very high chemical and thermal resistance. Such seals can withstand virtually all kinds of chemicals and can be used at long duration conditions with temperatures up to +260 °C. Perfluoro-caoutchouc is better known under the trade names KALREZ® by DuPont, CHEMRAZ® by Greene Tweed, respectively Dyneon™ Perfluoroelastomers PFE by Dyneon.

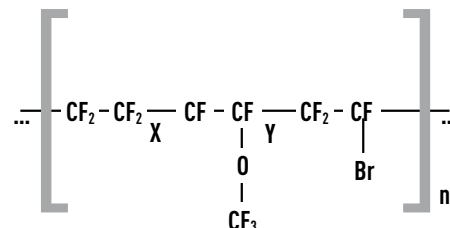

# Elastomers - Chemical Resistance

Classes of substances at 20°C	NBR	FKM	FFKM	EPDM
Water	++	++	++	++
Acids	+	+	++	++
Lyes	+	+	o	++
Oils and fats	+	++	++	-
Fuels	+	++	++	-
Ozone	o	++	++	++
Hydrocarbon, aliphatic	++	++	++	-
Hydrocarbon, aromatic	-	++	++	-
Hydrocarbon, chlorinated	-	++	++	-
Temperature range, °C	-40 up to +130	-20 up to +200	-20 up to +250	-30 up to +140

Definition: - not suitable, not recommended  
 o possible, moderate to good  
 + good  
 +++ very good, best choice



# Materials - Physical Properties

Property	Standard	Unit	PTFE <sup>1</sup>	PFA	FEP	ETFE	ECTFE	PVDF	PP	PA	PS	PMMA <sup>3</sup>	PPS	PEEK
Density	DIN 53 479	g/cm <sup>3</sup>	2.14–2.19	2.12–2.17	2.12–2.17	1.71–1.78	1.67–1.70	1.75–1.78	0.904–0.907	1.10–1.15	1.04–1.05	1.19	1.65	1.32
Service temperature without loading		°C	250–260	250–260	200–205	150–180	150–180	150–170	90–100	80–100	55–70	80	250	260
Inflammability			non-flammable	non-flammable	non-flammable	self-extinguishing	self-extinguishing	self-extinguishing	flammable	flammable	flammable	yes	self-extinguishing	V-0
Water absorption	DIN 53 495	%	<0.01	0.03	<0.01	<0.1	<0.1	0.03	<0.05	9–10	<0.3	—	0.02	0.5
Transparency			opaque	milky opaque	milky opaque	milky opaque	milky opaque	opaque	milky opaque	milky opaque	transparent	transparent	black	
Radioresistance		MGy	0.006	0.040	0.010	0.030	0.010	0.100	0.020	0.040	10	0.050	—	
Food suitability			Yes	Yes	Yes	No	No	Yes	Yes	Yes	Yes	Yes	No	
Mechanical	Standard	Unit	PTFE <sup>1</sup>	PFA	FEP	ETFE	ECTFE	PVDF	PP	PA	PS	PMMA <sup>3</sup>	PPS	PEEK
Tensile strength 23 °C	DIN 53 456	N/mm <sup>2</sup>	29–39	27–32	19–25	36–48	41–54	38–50	25–40	40–60	35–60	72	195	
at 70 °C			—	—	—	—	—	—	18–28	18–28	28–38	35	150	
at 150 °C			14–20	15–21	4–6	8–12	3.5–4.5	7.5–10.5	—	—	—	—	70	
Limit of elasticity 23 °C	DIN 53 455	N/mm <sup>2</sup>	10	14	12	24	34	46	25–40	40–80	32–57	—	—	97
Elongation at break 23 °C	DIN 53 455	%	200–500	300	250–350	200–500	200–300	20–250	400–800	40–280	2–4	—	1.9	50
Tension E-module 23 °C	DIN 53 457	N/mm <sup>2</sup>	400–800	650	350–700	500–1200	1200–1800	800–1800	1100–2100	1600–2000	2900–3500	3300	14700	3600
Limit of bending stress at 23 °C	DIN 53 452	N/mm <sup>2</sup>	18–20	15	—	25–30	50	55	45–60	40–60	breaks	—	—	
Bending E-module	DIN 53 457	N/mm <sup>2</sup>	600–800	650–700	660–680	1000–1500	1700	1200–1400	800–1500	1000–1600	3000–3400	—	—	
Ball hardness 132/60	DIN 53 456	N/mm <sup>2</sup>	25–30	25–30	23–29	34–40	55–65	62–68	58–80	50–80	110–160	—	—	200
Rockwell hardness R	ASIM d-785		—	—	—	45–55	85–95	100–115	—	90–100	—	—	100	99
Shore hardness D	DIN 53 505		55–72	60–65	55–60	63–75	70–80	73–85	70–75	—	—	—	—	
Coefficient of friction dyn. against steel, dry	<sup>2</sup>		0.05–0.2	0.2–0.3	0.3–0.35	0.3–0.5	0.65	0.2–0.4	0.3–0.5	0.3–0.35	—	0.5	0.4	
Thermal	Standard	Unit	PTFE <sup>1</sup>	PFA	FEP	ETFE	ECTFE	PVDF	PP	PA	PS	PMMA <sup>3</sup>	PPS	PEEK
Melting temperature	ASTM 2116	°C	327	300–310	253–282	265–275	240–247	165–178	158–167	215–221	—	—	285	335
Dimensional stability u. heat A (18.5)Kp/cm <sup>3</sup>	DIN 53 461	°C	50–60	—	51	71–74	76	80–92	55–60	55–80	70–88	105	—	152
heat B (4,6) Kp/cm <sup>3</sup>	DIN ISO R 75		130–140	—	70	104	115	146–150	85–95	165–195	76–100	—	—	
Coeff. of linear thermal expansion		1K x 10 <sup>-5</sup>	10–16	10–16	8–14	8–12	4–8	8–12	15–18	6–12	6–8	7	2.6–4.8	
Thermal conductivity at 23 °C	DIN 52612	W/K x m	0.23	0.22	0.20	0.23	0.15	0.17	0.22	0.21–0.23	0.15–0.16	0.19	0.20	0.25
Specific heat at 23 °C		Kj/Kg x K	1.01	1.09	1.17	1.95	—	1.38	1.68	1.5–2.1	1.18–1.34	—	—	2.16
Oxygen value		%	>95	>95	>95	30	60	43	<30	<30	<30	1.47	56	35
Electrical	Standard	Unit	PTFE <sup>1</sup>	PFA	FEP	ETFE	ECTFE	PVDF	PP	PA	PS	PMMA <sup>3</sup>	PPS	PEEK
Dielectric constant at 10 <sup>3</sup>	DIN 53 483		2.0–2.1	2.06–2.1	2.1	2.6	2.6	7.8–9.0	2.26–2.4	4–12	2.4–2.74	3.6	4.0	3.2
at 10 <sup>6</sup>			2.0–2.1	2.06–2.1	2.06–2.1	2.6	2.5	6.4–7.6	2.25	3.5–9	2.5	2.7	4.1	3.2
Dielectric loss factor at 10 <sup>3</sup>	DIN 53 483	10 <sup>-4</sup>	0.3–0.5	0.2	2–8	6–8	90	120–200	<4	270–2700	1–20	0.06	2	3.0
at 10 <sup>6</sup>			0.7–1.0	0.8	2–8	50	90	1500–1900	<5	300–3300	1–14	0.02	20	
Volume resistivity	DIN 53 482	Ω x cm	10 <sup>18</sup>	10 <sup>18</sup>	10 <sup>18</sup>	10 <sup>16</sup>	10 <sup>15</sup>	10 <sup>14</sup>	>10 <sup>16</sup>	10 <sup>12</sup>	>10 <sup>11</sup>	10 <sup>15</sup>	>10 <sup>13</sup>	5x10 <sup>14</sup>
Surface resistivity	DIN 53 482	Ω	10 <sup>17</sup>	10 <sup>17</sup>	10 <sup>16</sup>	10 <sup>14</sup>	10 <sup>14</sup>	10 <sup>13</sup>	>10 <sup>13</sup>	10 <sup>10</sup>	>10 <sup>13</sup>	5 x 10 <sup>13</sup>	>10 <sup>15</sup>	10 <sup>12</sup>
Creep resistance	DIN 53 480		KA3c	—	KA3c	—	—	KA1	KA3c	KA3a-b	KA2-1	600	—	KC 150
Arc resistance	ASTM 495	sec	>360	—	>300	>75	135	>30	—	—	—	—	—	
Dielectric strength	DIN 53 481	KV/mm	40–80	50–80	50–80	60–90	50–80	40–80	60–90	30–80	60–90	30	25–28	25
Gas permeability	Standard	Unit	PTFE <sup>1</sup>	PFA	FEP	ETFE	ECTFE	PVDF	PP	PA	PS	PMMA <sup>3</sup>	PPS	PEEK
Nitrogen permeability		cm <sup>3</sup> /m <sup>2</sup> d/bar	0.7	—	3.8	4.7	1.5	0.06	4.3	0.5	0.27	1	—	
Oxygen permeability		cm <sup>3</sup> /m <sup>2</sup> d/bar	2.05	—	30	15.6	0.39	0.05	19	1.2	2.35	1	—	
Carbon dioxide permeability		cm <sup>3</sup> /m <sup>2</sup> d/bar	5.7	—	60	38	17	0.2	61	4	8	—	4	
Water vapor permeability		g/m <sup>2</sup> /d	0.03	—	2	0.6	9	4.5	2.1	1	14	300	—	

<sup>1</sup> Not extrudable thermoplastic » <sup>2</sup> Not a standardised test. Friction coefficient is subject to different effects and can therefore only be used as a guide.  
<sup>3</sup> Tested partially by methods other than those stated; upon request additional physical characteristics available based on the actual test methods used.

All information stated without engagement.

# Fluoroplastics - Cleaning and Worth Knowing



282

All fluoroplastics, PTFE, PFA and FEP have a smooth, non-wetting surface and can usually be cleaned without any problems. Abrasive scouring agents might damage the surface and result in a milkiness of the vessels – especially those made of PFA and FEP. You may use all neutral detergents (pH 7). For a stronger contamination we recommend to use an alkaline detergent up to pH 12. Clean or dry vessels in a laboratory washing machine only when they are completely opened.

## Cleaning and re-utilisation of tubing

In principle, fluoroplastic tubing shall only be reused provided the material which shall be conveyed is known and rated with + in the chemical resistance chart. If the first conveyed products or components of chemical compounds are unknown, the reuse of tubing cannot be recommended. Appropriate detergents are all water-soluble substances (such as salts, acids, lyes, etc.). Volatile solvents such as alcohols, ester, ketones, low-boiling hydrocarbons, chlorinated hydrocarbon, etc. will be reversibly dispersed during aerated storage provided the substance was not absorbed by the inner layer of the tubing. After use with toxic or hazardous materials as well as with substances which only can be removed by using organic solvents, the tubing should be professionally disposed. Prior to reuse, cleaned tubing has to go through a visual inspection, respectively in case of doubt an inspection as per EN 12115 has to be made.

## Autoclaving at +121 °C and 134 °C

Vessels made of PTFE, PFA or FEP can be sterilised using steam at +121 °C / 30 minutes respectively at 134 °C / 10 minutes. Besides a steam pressure sterilisation, a dry sterilisation at +160 °C is also possible. In order to avoid any plastic deformation, vessels with screw covers or stoppers have to be open while being autoclaved respectively sterilised. Autoclaving/Sterilisation of closed vessels can destroy them. Sterilisation of vessels made of fluoropolymers with high-energy radiation, gamma radiation or electron radiation is not recommended since this can cause a degeneration of the mechanical properties of the fluoropolymers.

## Cleaning for trace analysis

To prevent contamination with cations or anions in trace analysis, the vessels should first be filled with an 1N HCL and HNO<sub>3</sub> solution. This solution should be left inside the vessels for maximum 6 hours at room temperature before rinsing the vessels with clean distilled water. Following test methods, which are common in the semiconductor industry, the vessel surfaces can also be cleansed by storing them for 24 hours in deionised water at +85 °C. In this case the vessels should be rinsed with deionised water as well.

## Pressure resistance of bottles

Due to their thin walls, standard PTFE, PFA or FEP bottles should not be pressurised (from inside). Pressurisation could result in permanent deformation. More suitable for such applications are BOLA digestion vessels on page 215 or BOLA reaction vessels on page 206.

## Plastics in microwave ovens

Plastics in general and fluoroplastics with their high thermal resistance in particular are suitable for microwave energy. The microwaves solely heat the contents of the vessel. Fluoroplastic vessels are particularly suitable for heating of aggressive chemicals such as acids or solvents. However, it should be noted that produced vapours are sufficiently drawn off. The more, a controlled drainage to a collecting vessel has to be arranged in case of bursture of the rupture membrane in the digestion vessel. Other vessels or containers than digestion vessels may only be heated when open.

## Response times of temperature probes

The response time of a temperature probe is determined by introducing the probe to a step change in temperature and measuring how long the probe takes to reach a certain proportion of its final, steady-state reading. Normally,  $T_{50}$  (the time taken to reach 50% of the final reading) or  $T_{90}$  (the time taken to reach 90% of the final reading) are stated.



Field-proven method of determination: Put the temperature probe in an ice cold water bath and let it reach a steady-state. Then transfer it quickly to a column of steam and monitor its resistance until a steady state is reached again.

## Fluoroplastics - Heating

Due to the low heat transfer and the maximum surface temperature that may not be exceeded, it is very difficult to heat PTFE vessels. There are different methods to heat PTFE vessels:

### » Heating by a heating mantle with surface sensor:

When heating with a heating mantle, a large surface of the vessel is covered. This supports the heat transmission and reduces the heating period. The mantle must have a sensor on its surface. This probe measures the temperature on the surface of the PTFE and switches the mantle off upon exceeding +250 °C. Only this way a deformation of the laboratory equipment caused by temporary overheating is avoided. In case of an intense increase of the temperature of > 380 °C hazardous decomposition products can occur.

We advise against the use of "usual" heating mantles and control systems. Their use may result in the same effects as the use of hotplates (see below).

### » Heating by a thermostat:

The heat transmission is provided by the bath medium (oils or other liquids). Controlled by an adjusted thermostat, the temperatures on the surface of the PTFE vessel will not become too high. Depending on the immersion depth, a big surface for a good heat transmission is provided. The handling of oils at high temperatures and the associated risk potential requires to work cautiously and safely, if necessary use protective clothing and equipment.

### Not appropriate methods are:

#### » Flame (e.g. gas burner):

With this method, the surface temperature cannot be controlled. Due to temporary overheating decomposition products in the form of both invisible gases and white smoke occur. Those products are extremely hazardous to health.

#### » Hotplate:

Overheating can occur as well. Usual hotplates can only be switched on or off. During the heating period, the plate is heated with full energy so that it almost glows. Afterwards, the hotplate is switched off and only heats for a few seconds. This so-called „pointing“ is enough to exceed the maximum temperature of +260 °C. It does not make sense to put the adjusting knob only to +150 °C. PTFE labware char on the underside and glue to the hotplate. The thermoplastics PFA and FEP melt directly, similar to a hot-melt-type adhesive. This can be prevented by putting an aluminium foil between hotplate and vessels but dangers for health cannot be avoided.

#### » For further information regarding "Safe handling of Fluoropolymers" we refer to the leaflet of Plastics Europe, which can be downloaded on the following sources:

## Safety Advice

- » PlasticsEurope AISBL; Avenue E. van Nieuwenhuysse 4/3; B-1160 Brussels/Belgium, Phone: +32 (0) 2 675 32 97, info@plasticseurope.org, www.plasticseurope.org

### Main risks and adversarial effects

Fluoroplastics are inert plastics, at normal use there are no risks for human health and environment. If the material is exposed to temperatures of more than +350 °C, it is possible that hazardous materials such as HF, COF<sub>2</sub> and others are released and can cause bad chemical burns which are not immediately noticeable.

### Symptoms after contact

The materials released during thermal decomposition are very dangerous when getting in contact with eyes, skin or when being breathed in.

- » **Eyes:** Redness, irritation, burning
- » **Skin:** Redness, irritation, burning
- » **Breathing in:** Headache, shortness of breath, illness, shivering, fever ("polymerisation-fever", raised pulse).

#### Special instructions for the case of breathing in:

The symptoms might only start some hours after breathing in. It is extremely important to seek medical advice to avoid lasting impacts!

### First aid procedures

After breathing in, it is extremely important to seek medical advice. The person concerned should be immediately brought to a place with fresh air. It is also necessary to give him/her oxygen. In case of apnoea it is necessary to give artificial respiration, possibly by mouth-to-mouth resuscitation.

- » In case of eye contact rinse immediately with water for at least 15 minutes.



- » In case of skin contact wash immediately with water and soap (especially the skin under the nails).
- » Additionally seek medical advice!

### Dangers of fire

There are possible risks due to acid and toxic production which can occur during thermal decomposition (HF and COF<sub>2</sub>).

### Precautionary measures in case of fire:

Take away the product from the fire but be careful. Stay against the wind direction and in sufficient distance. Appropriate extinguishing agents are water, CO<sub>2</sub>, foam, earth/sand. Wear special clothes such as respirator and skin protection against HF-vapours.

# Tubing - Pressure Resistance


## PTFE Tubing

The graph on the right side will help you to determine the recommended working pressure (approx. 0.25 x short time burst pressure) for PTFE tubing. For working temperatures above +20 °C the working pressures stated in this graph have to be multiplied by the corresponding reduction factor. For temperatures below +20 °C no reduction factors have to be considered.

### Example:

For PTFE tubing with inner diameter of 6 mm and a wall thickness of 1 mm the working pressure at +20 °C is about 8.8 bar. At a temperature of +50 °C, this value has to be reduced to 7.6 bar (**pressure 8.8 bar x reduction factor 0.87 = 7.65 bar**).

Temperature °C	50	75	100	150	200	250
Reduction Factor	0,87	0,77	0,68	0,53	0,39	0,28

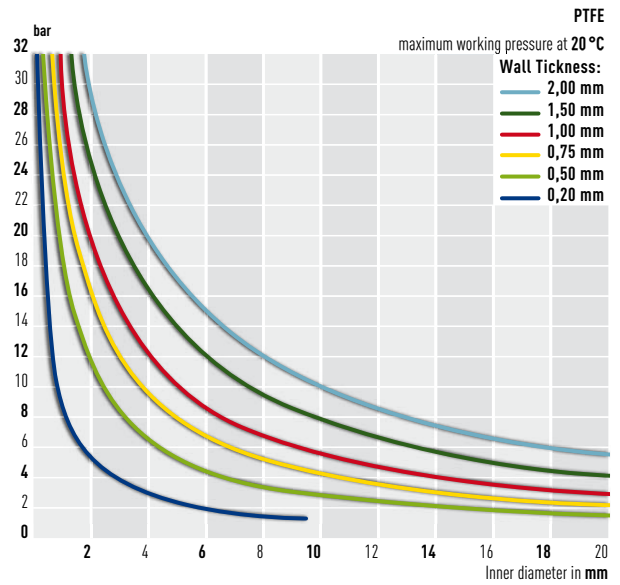


## FEP Tubing

The graph on the right side will help you to determine the recommended working pressure (approx. 0.25 x short time burst pressure) for FEP tubing. For working temperatures from -50 °C to +150 °C the working pressures stated in this graph have to be multiplied by the corresponding reduction factor.

### Example:

For FEP tubing with inner diameter of 6 mm and a wall thickness of 1 mm the working pressure at +20 °C is about 7.8 bar. At a temperature of +50 °C, this value has to be reduced to 6.1 bar (**pressure 7.8 bar x reduction factor 0.78 = 6.1 bar**).

Temperature °C	-50	0	20	50	100	150
Reduction Factor	1,13	1,04	1,00	0,78	0,45	0,21

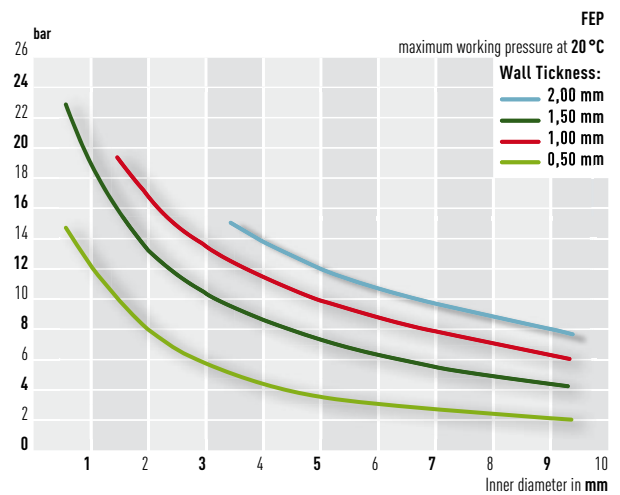


## PFA Tubing

The graph on the right side will help you to determine the recommended working pressure (approx. 0.25 x short time burst pressure) for PFA tubing. For working temperatures above +20 °C the working pressures stated in this graph have to be multiplied by the corresponding reduction factor. For temperatures below +20 °C no reduction factors have to be considered.

### Example:

For PFA tubing with inner diameter of 6 mm and a wall thickness of 1 mm the working pressure at +20 °C is about 14 bar. At a temperature of +50 °C, this value has to be reduced to 12 bar (**pressure 14 bar x reduction factor 0.86 = 12 bar**).

Temperature °C	50	100	200
Reduction Factor	0,86	0,50	0,26

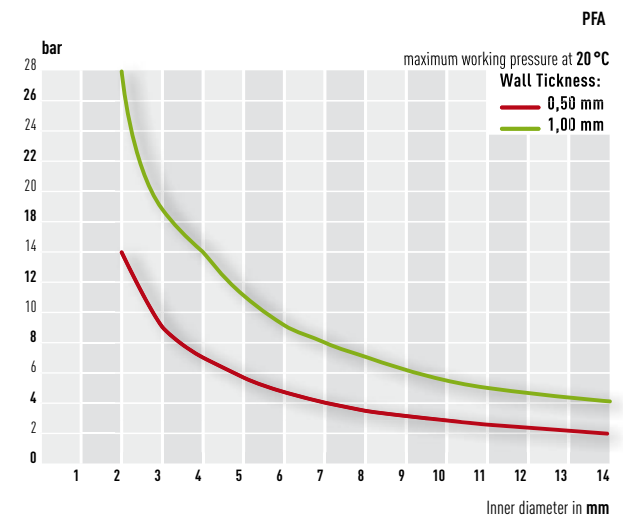

# Tubing - Choice and Assembly

## Choice of wall thickness

When choosing the wall thickness, a couple of issues have to be considered:

- » What max. pressure will be applied?  
In the charts on page 284 the minimum wall thickness can be easily found.
- » To which temperatures will the tubing be exposed?  
The maximum pressure has to be reduced by the stated factors.
- » Shall the tubing be applied under vacuum?  
Then the wall thickness has to be sufficient (rule of thumb).

Rule of thumb for determination of wall thickness:

$$\text{outer-}\varnothing \times 0.1 \text{ (0.15)} = \text{wall thickness}$$

For a "normal" use in the lab, this rule of thumb offers a certain security concerning pressure and temperature, e. g. PTFE tubing with an outer diameter of 8 mm should have a wall thickness of 0.8 to 0.9 mm. In this case you should choose a wall thickness of 1 mm.

## Fitting and tubing have to fit

Practice has proved that tubing varies in diameter. We therefore recommend to check before assembly whether the tubing outer diameter corresponds to the nominal size (e. g.  $\varnothing$  6 mm). The values in the right chart will be helpful.

The surface of PTFE tubing can be damaged if V-rings are inserted by force and result in leakage.

Nominal- $\varnothing$ of screw joint in mm	0.5–3,2	4.0–14	> 16
Recommended max. tolerance of tube/tubing in	$\pm 0.05$	$\pm 0.1$	$\pm 0,25$

## Easy assembly

First check whether your laboratory screw joint (inner diameter) fits your tubing (outer diameter). If it is still difficult to put the tubing inside the inner parts of the laboratory screw joint, a trick can be helpful. Just either sharpen the tubing with a simple sharpener or cut it diagonally. You should now be able to easily put the tubing through the inner parts.



## Transition from imperial to metric tubing

With BOLA Tube Fittings and Reducing Unions, transition from imperial to metric tubing or connections between both can easily be made. For example: A pipe socket of an analytical device with an outer diameter of 1/4" shall be connected to a PTFE tubing with an outer diameter of 8 mm.

**Needed components:** Reducing union 6 mm to 8 mm (Cat.No. D 526-10) and a set of tapered V-rings  $\varnothing$  1/4" (6.35 mm; Cat.No. D 502-03).

By exchanging the 6 mm V-rings with the 1/4" V-rings, the pipe socket can be connected to the 1/4" reducing union and the 8 mm PTFE tubing on the other side.



# Tubing - Assembly

## BOLA Laboratory Screw Joints

### Application

BOLA Laboratory Screw Joints are the perfect choice to connect hard-walled tubing (e. g. PTFE, PFA, FEP) or tubes in different materials (such as glass, metall, plastics) with devices with GL-threads.

### Components

Each laboratory screw joint consists of a cap with female GL-thread, bore and internal cone as well as a set of three inner parts: v-ring, tapered ring and sealing ring. For laboratory screw joints for tubing O. D. smaller than 3 mm, the sealing ring additionally includes a FPM-o-ring which is protected by a PTFE sealing lip.

The special clou of BOLA's Laboratory Screw Joint System: You can connect different tubing diameters to the same GL thread by simply exchanging the inner spare parts. It is not necessary to adapt the GL thread or fitting. A reduction is made by exchanging the inner spare parts instead of adapting the GL thread.




### Choice

A suitable laboratory screw joint for your connection can be easily found. First of all, the outer diameter of the tubing or tube and the size of the GL thread to which the laboratory screw joint shall be connected have to be determined. Further assistance on the determination of threads can be found in our technical appendix (page 294).

Also the application is decisive: Will there be temperatures of more than +150 °C? If so, the BOLA Laboratory Screw Joints HT in PPS (black) are the right choice (see page 73). PPS provides besides at once a good thermal and chemical resistance. Or is a high chemical resistance more important? Then you have to choose BOLA Laboratory Screw Joints in ETFE (red) on page 71. In comparison to PPS, they provide a better chemical resistance but can only be used up to max. +150 °C. For more flexibility, all screw caps and sets of inner spare parts can also be ordered separately.

### Assembly and Function

Assembly can easily made by hand. First, the screw cap has to be put on the tubing end, that shall be mounted to the GL socket. After that, the inner parts are pushed on the tubing. Please pay attention to the right order: slotted v-ring, tapered ring and o-ring for O.D. smaller than 3 mm, sealing ring as well as on the correct mounting orientation. A schematic drawing on our labels repeats this information. Push the tubing through the GL socket, place the inner parts on the sealing surface of the GL-thread and finally fix the connection by tightening the screw cap. The screw cap presses firmly the sealing ring and the tapered ring on the GL-threaded counter piece. At the same time, the v-ring is compressed and the tubing is fixed tightly as well. The complete connection is tight. Provided the laboratory screw joint is exposed to changing working temperatures, it might be necessary to tighten the screw joints once more due to different expansion coefficients of the used materials PTFE and PPS/ETFE.

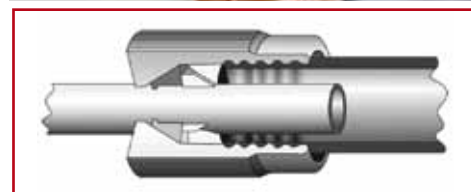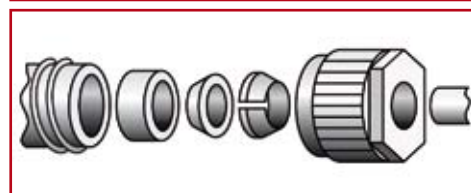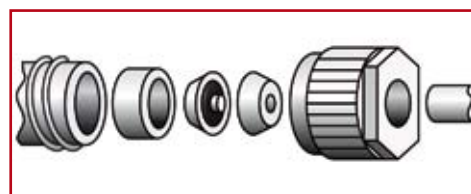

# Tubing - Useful Hints

## Thin tubing at vacuum and high temperatures

At high temperatures, under vacuum or with thin wall thickness we recommend to support the tubing in the laboratory screw joint. This can for example be made by using a short piece of glass or metal tube. Consequently, the tubing cannot turn off to the inside and become leaky. This trick allows also to connect elastic, gummy tubing to GL threads by means of BOLA Laboratory Screw Joints.



## Dimensional tolerances of PTFE, PFA and FEP tubing

All tubing listed herein match the sizes of the BOLA screw joint system. Therefore you can be sure that all fittings and connectors fit together. Practice has proved that all kinds of tubing have certain tolerances in both outer diameter and wall thickness. All tubing stated herein have been checked several times. This inspection based on strict rules stipulated by BOLA that exceed the demands for dimensions or quality control usually applied on the market.

In addition to the outer diameter, the wall thickness is important to evaluate the quality of tubing. We, at BOLA have stipulated stricter limits for the tolerances of the wall thickness than usually applied. Above all, we do not allow cumulative tolerances of the tubing dimensions to result in incorrect wall thickness. Thus, the wall thickness may only vary according to the outer diameter as stated in the chart on the right.

In addition, all tubing is carefully tested whether they show any faults in material (e. g. inclusion of impurities), any longitudinal or horizontal nerves or any reliefs at the outer and inner diameter.

## Processing of heat shrinkable PTFE tubing

Shrinking should be done at a temperature of +340 °C +/-10 °C. (At approx. +327 °C the appearance of PTFE changes from white to transparent). Please note that the part to be coated has to withstand the shrinking temperature. Temperatures exceeding +350 °C lead to overheating of the heat shrinkable tubing and destroy its plastic memory (shrinking capacity). Thus, the tubing becomes unusable. Steady heating and cooling from all sides provides the best result, otherwise creases and tearing can arise. Appropriate heat sources are ovens or air heaters. We strongly advise against using gas flames as this can lead very easily to irregular overheating. Longitudinal shrinkage can occur during shrinking. The longitudinal shrinkage is approx. 15 %.

Nominal outer-Ø mm	0.4–2.9	3.0–10.0	10.1–16.0	16.1–22.0	> 22.1
Tolerance outer-Ø mm	± 0.05	± 0.10	± 0.15	± 0.20	± 0.20

Wall thickness mm	0.1–0.3	0.4–1.0	1.1–2.0	> 2.1
Tolerance mm	± 0.025	± 0.05	± 0.10	± 0.20

### Example:

Nominal outer-Ø 16 mm ; min.-Ø 15.85 mm; max.-Ø 16.15 mm  
Wall thickness 1 mm ; min. wall. 0.95 mm; max. wall. 1.05 mm

Both tolerances must not be added so that an even bigger discrepancy of outer or inner diameter would be possible!

### Safety instructions:

Use adequate ventilation to assure removal of toxic vapours which may be produced by overheating!



# Tubing - Useful Hints

## Bending radius of PTFE, PFA and FEP tubing


During the assembly of devices with fluoroplastic tubing we are often confronted with the problem of how to create the smallest bending radius when the space is limited. To avoid buckling of the tubing with all its negative aspects, the following graph will be helpful to determine the smallest possible bending radius.

Take the outer diameter indicated on the horizontal axis, then follow the line upwards until it crosses with the appropriate wall thickness. From this intersection, follow the line to the left until it reaches the vertical axis which shows the minimum bending radius.

Rule of thumb for the bending radius:

$$\frac{\text{outer}^2 - \emptyset}{\text{wall thickness}} = \text{min. bending radius}$$

As reference value, the smallest possible bending radius can be determined by the square of the outer diameter divided by the wall thickness.

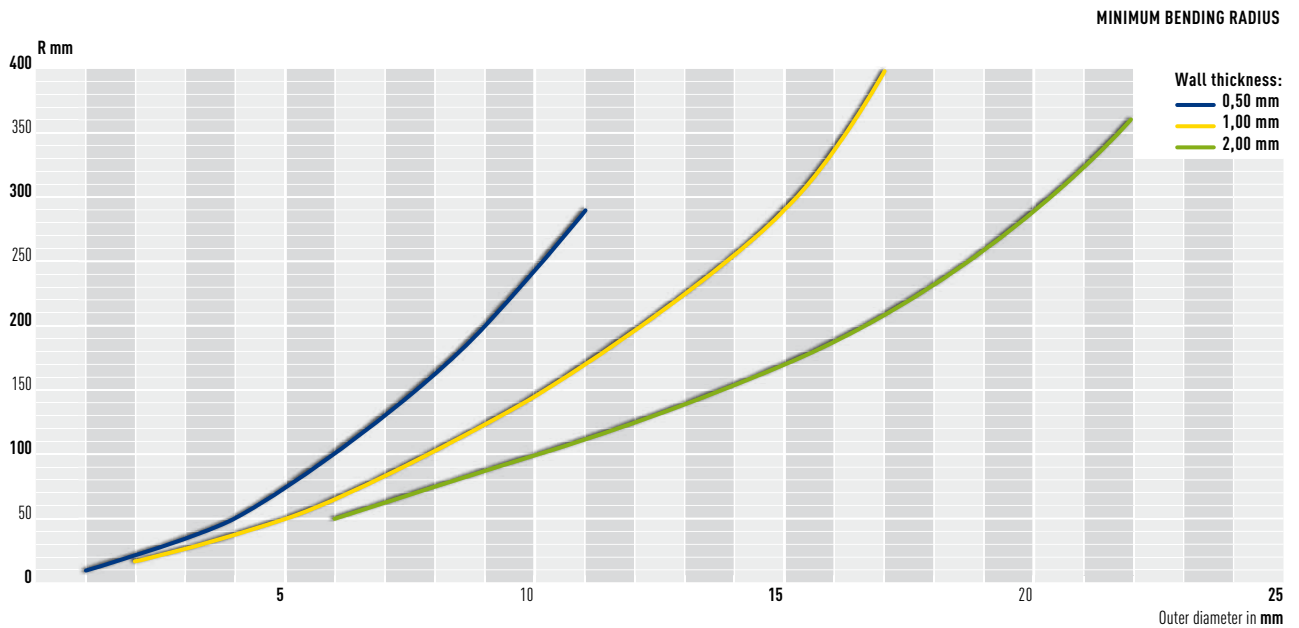

**Example:** A PTFE tubing with outer diameter 10 mm and a wall thickness of 2 mm has a minimum bending radius of 100 mm.




# Tubing - Useful Hints

## Permeability of PTFE and PFA


Because of its special processing and the resulting structural conditions, PTFE has a higher permeability than other thermoplastics. PFA has at the same wall thickness a lower permeability than PTFE due to its tight molecular structure. The gap between PTFE and PFA is closed through TFM-PTFE. This modified PTFE version is on the one hand processed as PTFE, but on the other hand it shows properties that are close to the fluoro thermoplasts PFA and FEP due to its special molecular structure.

For applications with low permeability rates, we recommend to use PFA tubing or alternatively FEP.


In the following graphs, the permeability of PTFE, TFM-PTFE and PFA is specified in dependence of the wall thickness and at different temperatures and in different media. From this follows that modified PTFE makes use of its excellent properties, especially at elevated temperatures and in hydrous media.

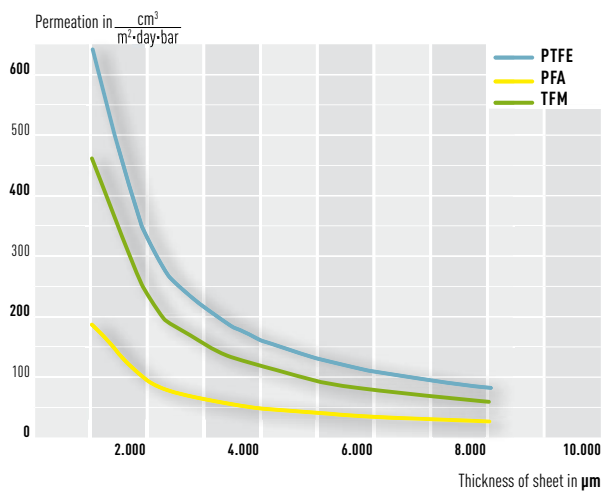

**Fig. 1:** Permeation of HCL (dried hydrogen chloride) at 20 °C through sheets made of PTFE, TFM and PFA

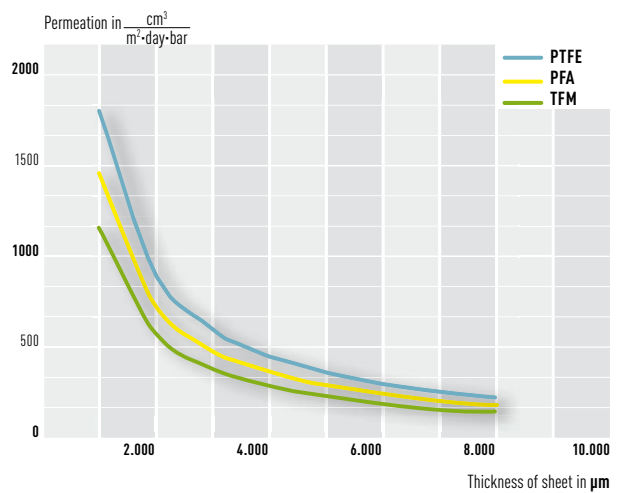

**Fig. 2:** Permeation of HCL (dried hydrogen chloride) at 100 °C through sheets made of PTFE, TFM and PFA

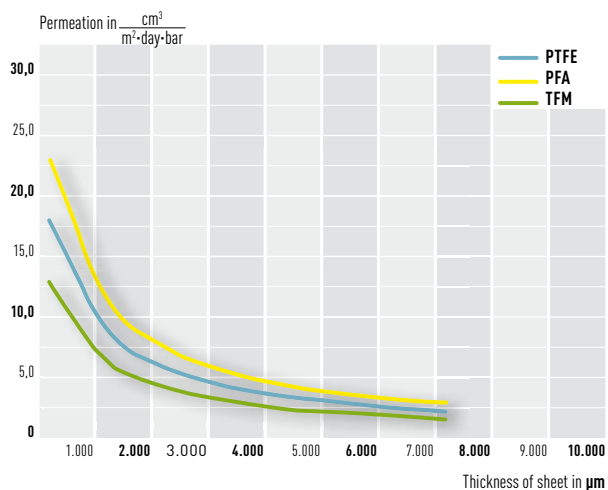

**Fig. 3:** Permeation of H<sub>2</sub>O at 100 °C through sheets made of PTFE, TFM and PFA

## Choice of Stirring Elements

With the following we would like to assist you in the choice of stirrer shafts. All stated values are experienced data established by experimentation and practical testing. All stirring elements are made for clockwise rotation (view from the top of the stirring agitator).

The **diameter of the stirring shaft** depends on the products used as well as on their viscosity. The higher the viscosity, the larger the shaft diameter. If you are in doubt, you should choose always the larger shaft diameter, in most cases it is possible to reduce the chucking diameter.

Stirrer shafts with a diameter of 8, 10 and 16 mm are most commonly used. For standard applications up to a rotation speed of 350 rpm and a max. length of 600 mm, a shaft diameter of 10 mm will be sufficient. For stirring of high viscous products or shaft lengths over 600 mm, it should be checked whether the use of a stirrer shaft with 16 mm will make sense. Furthermore, adequate stirrer bearings and chucks at the agitator should be available.

### Propeller stirrer shafts

Stirrer shaft with several, inclined, arched and partly twisted blades. Also with draught tube. Stirring effect is based on a mainly axial flow which moves away from the agitator; changes in the blade inclination or rotating direction result in a change of the flow direction.

$$R = (0.2 \text{ to } 0.4) \times D$$

$$B = (1.0 \text{ to } 1.5) \times R$$

**Do not forget** that the ideal diameter of the stirring element also will go through the "bottleneck" of your vessel, e. g. a ground joint or a flange. A tiltable stirrer blade might be helpful.

### Example Propeller Stirrer Shaft:



Assumption: Inner diameter of the vessel ( $D$ ) = 300 mm

1. Determination of the outer diameter of the stirring element  
 $R = (0.2 \text{ to } 0.4) \times D$ , thereafter follows 90 mm =  $0.3 \times 300$  mm.  
 Recommended outer diameter of the stirrer element is 90 mm.

2. Determination of the distance of the stirrer to the bottom  
 $B = (1 \text{ to } 1.5) \times R$ , thereafter follows 120 mm =  $1.2 \times 90$  mm.  
 The recommended distance of the stirrer to the bottom is 120 mm.

### Signs and symbols:

- D** Inner diameter of the vessel
- R** Outer diameter of the stirring element (stirring diameter)
- B** Distance of the stirrer to the bottom
- H** Height of the stirring element





### Discoidal stirrer shafts

Stirrer shaft with a blade with several, plane or curved paddles. Stirring effect is based on a radial, outwards directed flow with axial suction from the bottom and the top. The dispersing liquid is exposed to a high shearing.

$$R = (0.3 \text{ to } 0.4) \times D$$

$$H = 0.2 \times R$$

$$B = R$$





### Impeller stirrer shafts

Stirrer shaft with three angular, arched paddles. The stirring effect is based on a radial flow which is diverted axially due to the ground level position of the stirrer.

$$R = (0.50 \text{ to } 0.70) \times D$$

$$H = (0.12 \text{ to } 0.17) \times R$$

$$B = (0.08 \text{ to } 0.18) \times R$$





### Stirrer Shafts with rigid paddle

Stirrer with a narrow blade. The stirring effect is based on a radial and axial flow. The product is opposed to shear forces ranging from moderate to strong.

$$R = (0.70 \text{ to } 0.9) \times D$$

$$H = (0.05 \text{ to } 0.1) \times R$$

$$B = (0.10 \text{ to } 0.2) \times R$$





### Stirrer Shafts with rigid blade

Solid, plane blade in user-defined form. Stirring effect due to different rotation speeds of the product displaced by stirring and the residual vessel content.

$$R = (0.4 \text{ to } 0.5) \times D$$

$$H = (0.9 \text{ to } 1) \times R$$

$$B = 0.3 \times R$$





### Stirrer Shafts with angular blades

Stirrer shaft with several inclined, rectangular, straight blades (special form  $\alpha = 90$  degrees, also curved blades). The stirring effect is based on an axially directed flow combined with an increased shear rate. Reversion of the flow can be obtained by changing the inclination of the blades or the rotation direction.

$$R = (0.30 \text{ to } 0.40) \times D$$

$$H = (0.15 \text{ to } 0.25) \times R$$

$$B = (0.50 \text{ to } 1.00) \times R$$





### U-shaped stirrer shafts

Anchor stirrer blade adapted to the vessel's wall, reaches from edge to edge. The stirring effect is based on a mainly tangential flow with poor axial forces.

$$R = (0.90 \text{ to } 0.95) \times D$$

$$H = (0.50 \text{ to } 1.00) \times R$$

$$B = (0.003 \text{ to } 0.005) \times R$$





### Double impulse stirrer shafts

Stirrer shaft with two contrarily aligned blades on a radial arm. The stirring effect is based on an axial flow with poor radial forces. Analogue to the conveying direction of the blades an axial flow arises near to the shaft. The conveying direction of the outer paddles is adapted to the mixing demands.

$$R = 0.70 \times D$$

$$H = 0.20 \times R$$

$$B = 0.28 \times R$$



# Stirrer shafts - Maximum Revolutions per Minute


We would like to give advice on the appropriate RPMs, but unfortunately this question is not easy to answer. The following data are based on field-experience tests done with BOLA stirrer shafts.

Those tests have shown that it is not possible to state a maximum RPM but the range in which the shafts vibrate heavily. Such vibrations are called resonance. At a certain speed, a superposition of the oscillations takes place and the resonance becomes visible as vibrations. Due to those vibrations the bearings of the agitator are exposed to high stresses and in worst case accidents can be caused by tipping over agitators. The use

of liquids as medium can reduce vibrations, worn out agitator bearings or insufficient stability of the agitator support increase vibrations.

In practice, these "critical RPMs" should simply be avoided by either staying below or skipping quickly this "critical RPM range" to obtain a quiet running stirrer shaft. **In general:** the longer a stirrer shaft is, the larger its diameter should be.

Diameter of the stirrer shaft incl PTFE coating in mm

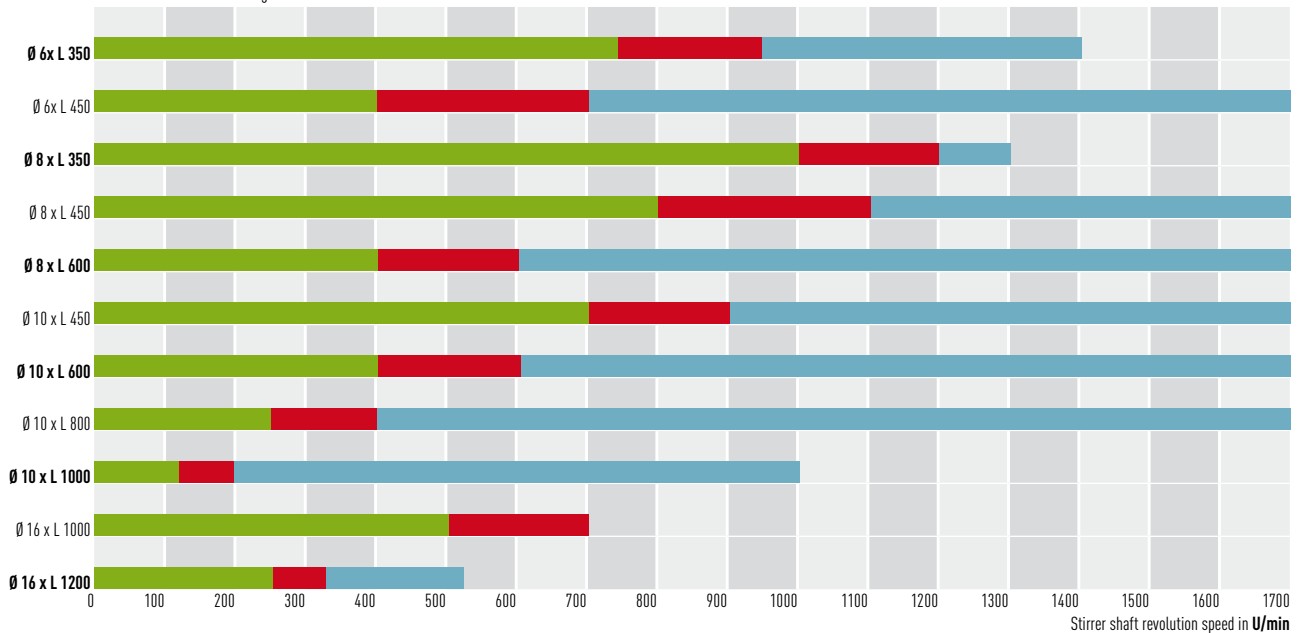

### The chart

shall help you to choose the right stirrer shaft respectively to determine the maximum RPM. As many different parameters affect the quiet running of a stirrer shaft, it is recommended that the user will test it under his own conditions.

**Please note** that for double impulse stirrer shafts the critical RPM range lies 200 rpm below the stated values.


- » **Green Area** – indicates up to which rpm the shaft will not be affected by vibration
- » **Red Area** – marks the critical RPM range. These rpms should be avoided whenever possible.
- » **Blue Area** – is reached after quick skipping of the critical RPM range, vibration seldom occurs, however, agitators and stirrer shafts are extremely stressed by high RPMs. Therefore we recommend to use stirrer shafts only in the green range – if possible.

# Stirrer - Magnetic Stirring

Magnetic stirring is a widely used method of stirring and mixing in liquid media. This process can be used over a broad temperature range and with virtually any chemical agent, as well as in open and closed systems, under pressure or vacuum.

## The basic system consists of two components:


A stirrer magnet placed in the liquid and a magnetic drive located outside the vessel. Both, stirrer magnet and magnetic drive form a magnetic circuit. For trouble-free stirring in liquids with different viscosities the magnetic drive shall have a wide range of different speeds. That is why the strength and form of the magnetic circuit between stirrer magnet and drive magnet is so important.

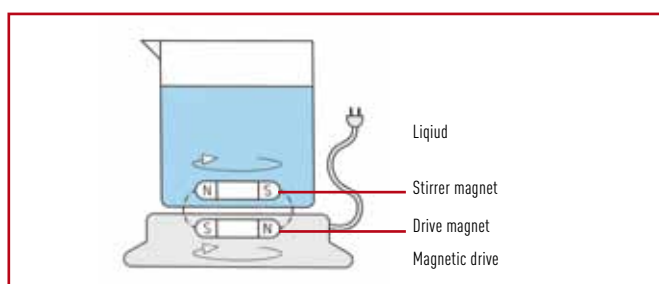

The **stirrer magnet** is a bar magnet encapsulated in a material which protects the magnet and prevents contamination of the liquid medium.

The core of the stirrer magnet is usually Alnico V, a less used alternative is Samarium-Cobalt. Due to its exceptional chemical and thermal (-200 °C to +260 °C) properties, Polytetrafluoroethylene is the most preferred encapsulant. It can easily be processed, is readily sterilised and satisfies FDA and USP Class IV requirements.

In principle, it is difficult to find the most effective magnetic stirring bar for a particular application, but important factors are the vessel shape and the viscosity of the stirring medium. In a petri dish, a long stirring bar at low speed will be effective, in a round bottom vessel egg-shaped (oval) magnetic stirrers will be a suitable choice. The ideal configuration is where the magnet of the stirring bar and the magnet of the drive are of equal length and with a minimum distance between them.

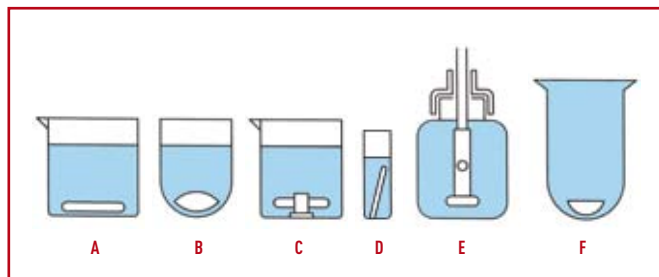


A Cylindrical magnetic stirring bar » B Oval or Egg-shaped magnetic stirring bar » C Magnetic stirring bar with bearing neck » D Magnetic stirring bar for cuvettes » E Magnetic stirring bar for culture bottles » F Custom manufacture for flanged reactors

The increase of the magnetic strength by using a SmCo magnet may be advantageous for many applications. However, this can have also negative consequences:

## » Migration

Where the stirrer magnet and drive magnet have very different lengths, the stirrer magnet can migrate to a pole of the drive magnet.

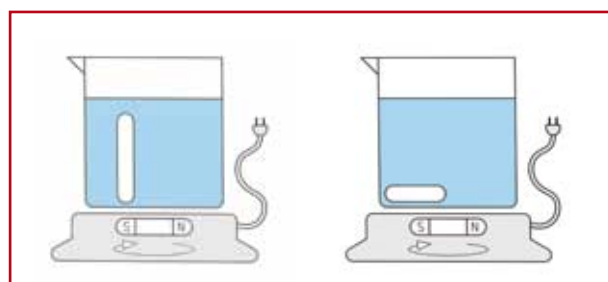

## » Braking

A very powerful force between drive and stirrer magnet can result in a braking effect. Due to the pressure of the stirrer magnet on the bottom of the vessel, the speed of rotation is reduced and rotation can even be prevented.

In general, no advice for or against a certain stirring bar form can be given. In case of doubt, a test of different stirring bars under your own conditions may be helpful.

The second part of this stirring system is the **magnetic drive** that consists in its simplest form of a simple, speed controlled induction motor or a stepper motor. In some cases the motor incorporates automatic reversing to improve mixing. Normally, the drive magnet is a simple square bar magnet, a U-magnet or a composite SmCo-magnet. Its rotation induces rotation of the stirrer magnet in the liquid. The designated speed can be adjusted by an incorporated speed control.


# Determination – Thread Types

Choosing a suitable fitting, screw cap or multiple distributor with the correct thread type and size is not as easy as it might seem with regards to the multitude of thread types.

On the following pages we have summarized the most common threads that we use at BOLA for our fittings, screw caps and multiple distributors.

Please use a sliding calliper for the determination of a thread type. Use it for the determination of the thread O. D. and the thread pitch. The pitch is the distance from one thread crest to the other as shown on our schematic drawings. Now the thread type can be determined by comparing the original thread with our figures. Once you have found a similar type, the actual thread size is identified by comparing the measured dimensions (thread O. D. and pitch) with the typical dimensions stated in the related chart.

Of course we will help you if you should still have problems in determining your thread. Just send us a sample or counterpiece, we will be glad to help you with your choice. But please understand that we are not able to determine threads on faxed or scanned copies or pictures.




## NPT (National Pipe Taper) Thread, American Pipe Thread or BSP (British Standard Pipe) Thread

Easy recognisable by its tapered outer and inner diameter which is self sealing. Therefore, NPT threads are also known as "sealing thread" or "tightly threaded connection".

Thread	Type	O. D. mm	Pitch mm
NPT	1/8"	9,9	27 turns at 1" = 0,94
NPT	1/4"	13,2	18 turns at 1" = 1,41
NPT	3/8"	16,6	18 turns at 1" = 1,41
NPT	1/2"	20,6	14 turns at 1" = 1,81
NPT	3/4"	26,0	14 turns at 1" = 1,81
NPT	1"	32,5	11,5 turns at 1" = 2,21

Example:

**NPT 3/8"** – O. D. = 16,6 mm

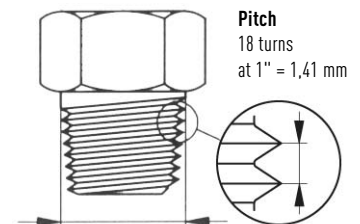

## G or R (Whitworth) or BSP (British Standard Pipe) Thread


Cylindrical threads which are mainly used in countries with imperial system. The size of e. g. R 3/4" does not stand for a diameter. Thus the corresponding size has to be determined according to charts.

Please note for the final determination whether you have a fitting with G- or R-threads: G-threads, male as well as female, are cylindrical whereas you have to distinguish that male R-threads have a conical form and its female counterpart is cylindrical.

Thread	Type	O. D. mm	Pitch mm
G or R	1/8"	9,6	28 turns at 1" = 0,91
G or R	1/4"	13,0	19 turns at 1" = 1,34
G or R	3/8"	16,5	19 turns at 1" = 1,34
G or R	1/2"	20,8	14 turns at 1" = 1,81
G or R	5/8"	22,8	14 turns at 1" = 1,81
G or R	3/4"	26,3	14 turns at 1" = 1,81

Example:

**G 3/8"** – O. D. = 16,5 mm



# Determination – Thread Types


## M thread (metric ISO-thread) – standard in Europe

Cylindrical inner and outer diameter which is precise in millimetres. The extremely fine taper of this thread allows the best possible force transmission. Metric threads are designated by a capital M plus an indication of their nominal outer diameter, for instance M 10. A pitch deviating from the standard is marked with an appendix like for instance M 10 x 0.75.

Thread	Type	O. D. mm	Pitch mm
M	5	5	0,80
M	6	6	1,00
M	8	8	1,25
M	10	10	1,50
M	12	12	1,75
M	16	16	2,00

Example:

**M 10** – O. D. = 10 mm



## UNF 1/4" 28G thread

It has its origin in the USA. Mainly used in chromatography / HPLC applications. Most common sizes are UNF 1/4" 28G and UNF 10 32G. The digits 28 G and 32 G stand for the number of thread pitches at a length of one inch (25.4 mm).

## UNF 1/4" 28G versus M 6


Without exception all BOLA HPLC Fittings come with the most common HPLC thread UNF 1/4" 28G. In addition, fittings and distributors with the very similar thread M 6 are used.

These threads can only be distinguished by exact determination of their outer diameter or by using a test mandrel (it is possible to screw in a tube end fitting in the counterpart of the other thread for at least 2-3 rotations). The UNF 1/4" thread has an outer diameter of 6.35 mm, the M 6 thread has precisely 6 mm (work tolerances are possible). We recommend to use only the UNF 1/4"-28 G thread to avoid confusion and double inventory.

Thread	Type	O. D. mm	Pitch mm
UNF	1/4" 28G	6,2	28 turns at 1" = 0,91
UNF	3/8" 24G	9,4	24 turns at 1" = 1,06
UNF	1/2" 20G	12,6	20 turns at 1" = 1,27
UNF	5/8" 18G	15,7	18 turns at 1" = 1,41
UNF	3/4" 16G	18,9	16 turns at 1" = 1,59
UNF	1" 12G	25,2	12 turns at 1" = 2,12

Example:

**UNF 1/4"-28G** – O. D. = 6,2 mm

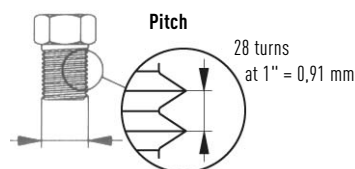

## Canister Thread S


Coarse buttress thread commonly used for many plastic containers and flasks.

On the market you can find canisters with known standardized threads as well as models which are made as per special manufacturers' specifications. Just contact us if you have problems to determine your canister thread.

Thread	Type	O. D. mm	Pitch mm
S	40	39,5	3,5
S	55	54	5,0
S	60	59,5	6,0
S	65	65,0	6,0
S	71	70,5	6,0
S	90	89,5	6,0

Example:

**S 65** – O. D. = 65,0 mm

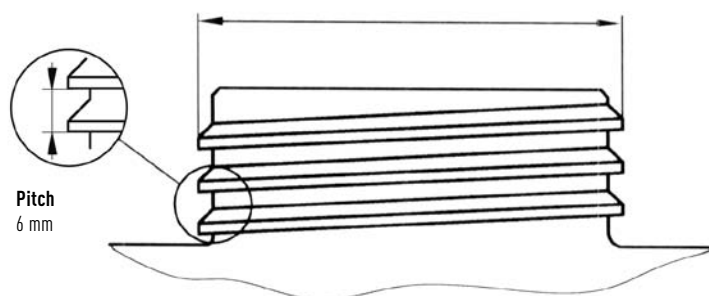

# Determination – Thread Types

## Barrel Threads **Mauser 2"**, **G 2"/R 2"** and **Tri Sure 2"**


Coarse buttress threads which can be distinguished by their pitch. On the market you can find barrels with known standardized threads as well as models which are made as per special manufacturers' specifications. Just contact us if you have problems to determine your barrel thread.

Thread	Type	O. D. mm	Pitch mm
Mauser 2"	BSC 70 x 6	69,5	6,00
G2" / R 2"	BSP 2"	59,6	11 turns at 1"=2,3
Tri Sure 2"	BSC 56 x 4	56,6	4,00

### Example:

**BCS 70 x 6 MAUSER 2"®** – O. D. = 69,5 mm

Pitch  
6 mm

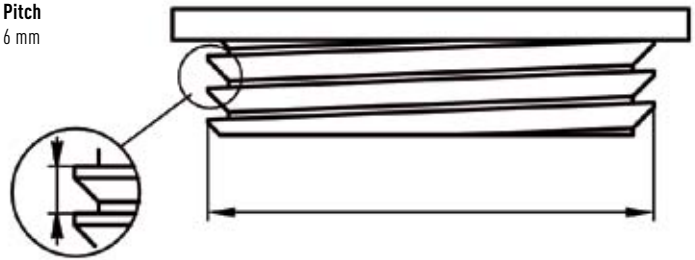


## GL Threads

GL threads are round threads, i. e. there are only round and no sharp ends at the flanks of the screw thread. Due to its simple shape and the round ends of the flanks, this thread can be easily formed on glass pipes. The extremely high pitch and the large flanks give this thread an important carrying power.

Thread	Type	O. D. mm	Pitch mm
GL	12	12	2,0
GL	14	14	2,5
GL	18	18	3,0
GL	25	25	3,5
GL	32	32	4,0
GL	45	45	4,0
GLS	80	80	15,0

### Example:

**GL 25** – O. D. = 25 mm

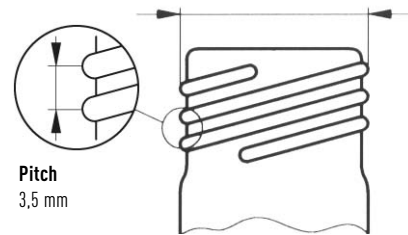

Pitch  
3,5 mm


## Nalgene Threads

The US-based company Nalgene produces amongst others plastic containers and flasks for storing chemicals. Especially Nalgene carboys are widely-used in laboratories. Nalgene threads can be recognized by their high collar on the buttress thread.

Thread	Type	O. D. mm	Pitch mm
Nalgene B53	Typ 2	54,0	6,0
Nalgene B83	Typ 2	88,0	12,7

### Example:

**Nalgene B53** – O. D. = 54,0 mm

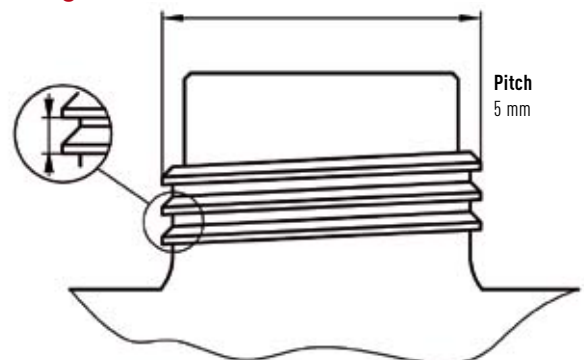

Pitch  
5 mm



## Determination – Thread Types


### GPI Threads

The abbreviation GPI stands for Glass Packaging Institute, the trade association representing the North American glass container industry. The GPI sets voluntary standards, i. e. they are defined as an basis to achieve interchangeability and compatibility of glass containers and their respective closures.

Thread	Type	O. D. mm	Pitch mm
GPI 33	Typ 2	31,8	3,0
GPI 38	Typ 1	37,05	4,0

Example:

**GPI 33** – o. d. = 31,8 mm

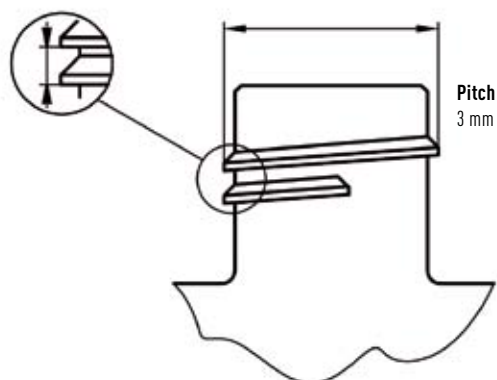

# BOLA's Commitment



## For the environment

BOLA takes its responsibility for the environment seriously. Our responsibility is not only a respectful handling of natural resources but also avoiding waste and integration of recycling in the production process.

- » Even during the machining of PTFE (e. g. drilling, turning or milling) all cuttings are collected by means of suction through a special tube system directly on our machines. All chips as well as remnants of semi-finished items are sorted according to their purity and stored contamination-free in large containers before later being recycled. During recycling, all chips and remnants are converted by a specially developed process into usable semifinished items.
- » With regard to the environment, disposable products are no longer in our mind. Therefore all our products are designed for long-time use.
- » Generation of chips can be avoided by using moulded parts. In addition, moulding reduces the consumption of PTFE powder and energy.
- » Products made of the most common fluoroplastics are free of plasticizers and solvents. Thus, they are not harmful for the environment.

## Free of PFOA / APFO


Formerly, perfluorooctanoic acid (PFOA) respectively sal ammoniac (APFO) have been used as additives in the polymerisation process during the production of polytetrafluorethylene (PTFE).

The use of these additives was obligatory in the emission polymerization process but has also partly been used in the suspension polymerisation process.


Although PFOA respectively APFO are almost completely removed from the final product and can mostly be regained during the production process, the well-known manufacturers of PTFE have committed themselves by self-declaration to waive the use of PFOA and APFO in any production process as of the production year 2015. With the renunciation of PFOA and APFO it is ensured that these chemicals, which have not been classified as toxic so far, do not accumulate in the environment.

By supplier agreements, BOHLENDER GmbH ensures that all fluoroplastic materials used for our products have been manufactured without the use of the additives PFOA and/or APFO. Besides PTFE and PTFE-TFM, this includes also all fluoro-thermoplastics such as PFA, FEP ETFE or PVDF.

### PFOA:



### APFO:

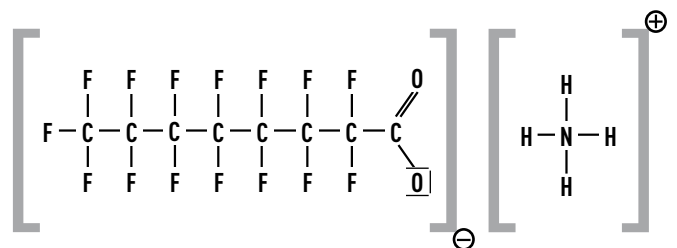



### For the German Stem Cell Donor File

BOHLENDER does not only support the activities of the German Stem Cell Donor File for the typing of stem cells financially. Through the personal typing and registration as a stem cell donor, we would like to give hope to people suffering from leukemia or other disfunctions of haematosi. Nowadays, we can help concerned people through a stem cell donation. If a suitable donor cannot be found within the own family, patients have to rely on an unknown donor. The more typings and registrations, the higher the chance for the patients to get a suitable donation. Saving life through a little blood donation – BOHLENDER supports this activity from the bottom of the heart!

### For promotion of sports and youth

The work with children and the youth in local sports clubs contributes to the advancement of physical, personal and social competences of the children and young adults and supports the competence to take actively part in the social life. As a matter of course, BOHLENDER has supported the local clubs (amongst them soccer and handball clubs) through the sponsoring of their sportswear for several years now. Only the ones who are healthy and fit can cope with the daily challenges in private and professional life.

### For the Civic Foundation Lauda-Koenigshofen

The Civic Foundation Lauda-Koenigshofen was found end of 2013 by dedicated citizens and companies. The targets of this foundation are the development, advancement and appreciation of sustainable and innovative ideas and concepts in Lauda-Koenigshofen and its districts. These targets are reached by the strengthening of the civic engagement and the advancement of a sustainable development of the local community in the fields of family, education, sciences, environmental protection, health, heritage and international understanding. The family company BOHLENDER has its roots in Lauda and has had a deep connection to the city of Lauda-Koenigshofen for a long time now. We at BOHLENDER perfectly identify with the idea and targets of the civic foundation. As an initial founder we respectively engage ourselves.

# Numerical Index

Cat. No.	Page	Cat. No.	Page	Cat. No.	Page	Cat. No.	Page	Cat. No.	Page	Cat. No.	Page	Cat. No.	Page	Cat. No.	Page
<b>A</b>		<b>B</b>		<b>C</b>		<b>D</b>		<b>E</b>		<b>F</b>		<b>H</b>		<b>P</b>	
A 100-	201	B 301-	230	C 429-	38	D 583-	115	D 780-	197	F 728-	249	H 983-	96	P 1950-	194
A 103-	202	B 302-	235	C 430-	39	D 584-	115	D 782-	82	F 730-	244	H 984-	96	P 1962-	194
A 105-	202	B 303-	234	C 432-	136	D 585-	115	D 784-	82	F 731-	244	H 986-	97	P 1980-	195
A 111-	202	B 304-	234	C 433-	135	D 586-	115	D 785-	87	F 738-	245	H 987-	97	P 1992-	195
A 114-	203	B 317-	236	C 435-	38	D 590-	71	D 787-	87	F 740-	242	H 988-	98		
A 117-	200	B 318-	206	C 440-	33	D 593-	71	D 788-	87	F 745-	241	H 989-	97	<b>S</b>	
A 118-	200	B 320-	228	C 441-	35	D 597-	72	D 790-	177	F 746-	241	H 993-	97	S 1800-	164
A 119-	201	B 321-	228	C 442-	35	D 598-	72	D 800-	80	F 755-	242	H 994-	98	S 1803-	163
A 124-	271	B 322-	228	C 443-	33	D 600-	72	D 802-	81	F 757-	242	H 995-	96	S 1805-	162
A 130-	205	B 323-	229	C 445-	34	D 606-	238	D 804-	81	F 760-	253	H 997-	214	S 1810-	155
A 131-	205	B 328-	236	C 446-	35	D 607-	239	D 810-	264	F 761-	254	H 998-	86	S 1810-	250
A 131-	216			C 448-	34	D 608-	238	D 840-	119	F 762-	252	H 999-	98	S 1811-	157
A 135-	211	<b>C</b>		C 450-	42	D 610-	239	D 841-	119	F 763-	254	H 1001-	144	S 1811-	250
A 136-	207	C 276-	128	C 454-	42	D 612-	76	D 842-	119	F 765-	266	H 1124-	167	S 1815-	156
A 137-	208	C 278-	128	C 461-	44	D 613-	76	D 846-	120	F 766-	266	H 1126-	168	S 1815-	250
A 149-	204	C 284-	128	C 463-	44	D 614-	76	D 848-	119	F 770-	246	H 1128-	167	S 1817-	161
A 151-	211	C 348-	55	C 472-	32	D 615-	76	D 849-	119	F 772-	246	H 1132-	168	S 1820-	159
A 155-	204	C 349-	63	C 474-	31	D 616-	77	D 850-	119	F 778-	253	H 1138-	214	S 1822-	154
A 156-	204	C 350-	54	C 476-	31	D 617-	77	D 856-	120	F 780-	261			S 1824-	125
A 158-	203	C 351-	59	C 482-	31	D 618-	79	D 857-	121	F 830-	255	<b>K</b>		S 1827-	126
A 159-	208	C 352-	62	C 484-	30	D 619-	79	D 858-	121	F 833-	255	K 1349-	235	S 1828-	158
A 164-	208	C 353-	57	C 486-	31	D 620-	178	D 859-	121	F 834-	255			S 1833-	163
A 169-	209	C 354-	55	C 488-	26	D 621-	79	D 864-	122	F 836-	256	<b>L</b>		S 1852-	162
A 170-	209	C 355-	62	C 490-	26	D 624-	79	D 865-	122	F 837-	256	L 1390-	197	S 1853-	162
A 171-	210	C 356-	62	C 492-	44	D 625-	108	D 872-	124					S 1855-	127
A 176-	210	C 357-	56	C 502-	43	D 628-	73	D 874-	124	<b>G</b>		<b>N</b>		S 1861-	160
A 177-	210	C 358-	56	C 504-	43	D 629-	73	D 901-	182	G 870-	270	N 1501-	260	S 1862-	160
A 183-	212	C 359-	60	C 512-	43	D 630-	73	D 911-	182	G 876-	272	N 1502-	261	S 1863-	160
A 185-	212	C 360-	60	C 520-	45	D 631-	73	D 915-	181			N 1503-	261	S 1864-	160
A 193-	212	C 361-	54	C 522-	46	D 632-	73	D 917-	183	<b>H</b>		N 1505-	268	S 1870-	166
A 194-	206	C 362-	63	C 576-	36	D 634-	75	D 930-	183	H 898-	124	N 1510-	268	S 1872-	167
A 195-	206	C 363-	64	C 579-	37	D 638-	74			H 900-	102	N 1520-	268	S 1874-	166
A 197-	211	C 364-	64	C 580-	37	D 639-	74	<b>E</b>		H 901-	102	N 1564-	267	S 1880-	158
A 200-	209	C 365-	57	C 581-	36	D 640-	74	E 650-	145	H 902-	103	N 1610-	268	S 1899-	161
A 223-	213	C 367-	61	C 584-	37	D 641-	74	E 652-	142	H 904-	103	N 1616-	268		
A 226-	213	C 368-	59	C 592-	36	D 642-	74	E 654-	142	H 905-	175	N 1650-	263		
A 240-	215	C 369-	61	C 598-	29	D 647-	74	E 661-	111	H 906-	175	N 1654-	264		
A 244-	216	C 371-	58			D 648-	145	E 664-	111	H 907-	175	N 1658-	263		
A 250-	215	C 372-	58	<b>D</b>		D 650-	78	E 667-	111	H 909-	65	N 1660-	259		
A 252-	215	C 374-	21	D 501-	144	D 651-	78	E 672-	142	H 912-	65	N 1662-	260		
		C 375-	47	D 502-	144	D 652-	78	E 674-	143	H 915-	66	N 1666-	265		
<b>B</b>		C 376-	20	D 503-	138	D 681-	253	E 680-	143	H 916-	66	N 1670-	262		
B 150-	220	C 376-	233	D 504-	139	D 690-	102	E 683-	112	H 918-	104	N 1674-	105		
B 152-	222	C 377-	25	D 505-	139	D 692-	101	E 684-	110	H 920-	213	N 1678-	266		
B 153-	224	C 378-	20	D 512-	140	D 693-	123	E 686-	110	H 927-	207	N 1682-	265		
B 154-	223	C 379-	21	D 516-	109	D 695-	123	E 688-	110	H 930-	172	N 1690-	267		
B 155-	222	C 380-	28	D 517-	109	D 696-	90	E 694-	113	H 931-	174	N 1696-	91		
B 156-	223	C 381-	27	D 518-	141	D 697-	90	E 689-	110	H 932-	172	N 1697-	92		
B 170-	132	C 382-	28	D 526-	140	D 698-	90	E 690-	110	H 933-	173	N 1698-	93		
B 172-	136	C 384-	22	D 537-	108	D 701-	91	E 712-	122	H 934-	174	N 1699-	93		
B 173-	136	C 387-	47	D 538-	106	D 720-	179	E 714-	122	H 935-	173			<b>P</b>	
B 174-	134	C 389-	25	D 539-	107	D 730-	105	E 716-	122	H 936-	176	P 1720-	198		
B 280-	227	C 391-	29	D 540-	106	D 731-	254			H 937-	176	P 1724-	198		
B 281-	228	C 392-	24	D 541-	107	D 734-	178	<b>F</b>		H 942-	174	P 1730-	190		
B 282-	228	C 393-	23	D 549-	75	D 736-	92	F 700-	251	H 958-	165	P 1734-	129		
B 283-	228	C 398-	23	D 568-	114	D 737-	92	F 701-	250	H 959-	165	P 1740-	189		
B 284-	229	C 399-	23	D 569-	114	D 738-	104	F 702-	248	H 960-	164	P 1744-	129		
B 285-	229	C 400-	49	D 570-	177	D 739-	104	F 703-	247	H 964-	169	P 1750-	191		
B 286-	232	C 401-	48	D 571-	177	D 744-	85	F 704-	249	H 969-	180	P 1750-	231		
B 287-	231	C 402-	49	D 572-	147	D 746-	85	F 705-	249	H 972-	168	P 1760-	191		
B 288-	232	C 407-	50	D 573-	147	D 748-	84	F 706-	251	H 973-	100	P 1760-	231		
B 289-	233	C 410-	50	D 574-	146	D 750-	86	F 707-	243	H 975-	99	P 1762-	192		
B 290-	230	C 420-	65	D 575-	146	D 754-	86	F 709-	251	H 977-	100	P 1770-	193		
B 291-	229	C 423-	134	D 576-	147	D 760-	88	F 710-	243	H 978-	82	P 1792-	193		
B 292-	233	C 424-	38	D 577-	146	D 762-	89	F 712-	245	H 978-	236	P 1850-	196		
B 293-	234	C 425-	39-41	D 579-	148	D 764-	89	F 716-	246	H 979-	99	P 1860-	196		
B 295-	230	C 426-	40	D 581-	114	D 766-	89	F 717-	246	H 980-	176				
		C 428-	39	D 582-	114	D 772-	123	F 718-	247	H 981-	179				

# Alphabetical Index

<b>A</b>	
Adaptors	
» Adaptors for Prominent Pumps	<b>105, 254</b>
» Adaptors for Temperature Probes	<b>198</b>
» Barrel-GL-Adaptors	<b>92</b>
» Chromatography Adaptors	<b>242</b>
» Glass Flange Metal Adaptors	<b>179</b>
» Ground Joint Adaptors	<b>176</b>
» Ground Joint GL Adaptors	<b>178</b>
» Miniature Screw-In Adaptors	<b>246</b>
» Receiver Adaptors	<b>233</b>
» Scrubber Adaptors for Bottles	<b>259</b>
» Threaded Adaptors	<b>82, 108, 236</b>
Antistatic Explosion-Proof Tubing	<b>125-127</b>
<b>B</b>	
Balls	<b>269</b>
Ball Valves with GL Thread	<b>111</b>
Barrel Aeration	<b>91</b>
Barrel-GL-Adaptors	<b>92</b>
Baskets	<b>214</b>
Beakerliner	<b>63</b>
Beakers	
» Beakers made of PFA	<b>208</b>
» Beakers made of PTFE	<b>207</b>
» Lids made of PTFE	<b>207</b>
» Thermo Beakers	<b>211</b>
Bearing Necks	<b>64</b>
Bellows	
» Bellows	<b>175</b>
» GL Bellows	<b>103</b>
Blades for Tubing Cutter	<b>162</b>
Boiling Stones	<b>168</b>
Bolts	
» Assortments of Tube End Fittings	<b>249</b>
» Connection Bolts	<b>255</b>
» Double Tube End Fittings	<b>247</b>
» Plugs	<b>249</b>
» Screws with Countersunk Head	<b>167</b>
» Screws with Cylindrical Head	<b>167</b>
» Tube End Fittings	<b>248</b>
Bolts and Clamp Rings	<b>50</b>
Bottles	
» Culture Bottles	<b>65</b>
» Micro Scrubber Bottles	<b>201</b>
» Narrow-Mouth Bottles with Conical Neck	<b>202</b>
» Scrubber Bottles	<b>200</b>
» Scrubber Bottles Vitrum	<b>260</b>
» Wash Bottles	<b>203</b>
» Wide-Mouth Bottles	<b>201</b>
» Wide-Mouth Bottles with Conical Neck	<b>202</b>
Bottles Distillation Apparatus	<b>236</b>
Buchner Funnels	<b>264</b>
<b>C</b>	
Capillary Tubing	<b>161</b>
Caps	<b>72, 75, 86, 96-98, 120</b>
Centrifugal Stirrer Blades	<b>50</b>
Centrifuge Tubes	<b>212</b>
Chromatography Adaptors	<b>242</b>
Clamps for Ground Joints	<b>174</b>
Cold Traps	<b>236</b>
Colour Tubing	<b>160</b>
Condensers	<b>229-230</b>
Conductivity Probe	<b>197</b>
Connection Bolts	<b>255</b>
Connectors	
» Cross for GL Thread	<b>107</b>
» Cross for GL Thread EX	<b>121</b>
» Elbow for GL Thread	<b>107</b>
» Elbow for GL Thread EX	<b>121</b>
» Elbow for metric Thread	<b>139</b>
» Ground Joint Tube Fittings with GL Thread	<b>177-178</b>
» Ground Joint Tube Fittings with metric Thread	<b>142, 234</b>
» Hose Connectors	<b>114-115</b>
» Joining Fittings	<b>252</b>
» Luer Connectors	<b>246</b>
» Luer-Lock Connectors	<b>247</b>
» Quick Connectors	<b>108</b>
» Screw-In Tube Fittings with GL Thread	<b>109, 222</b>
» Screw-In Tube Fittings with metric Thread	<b>141</b>
» Screw-In Tube Fittings with UNF Thread	<b>254</b>
» Socket-GL Tube Fittings	<b>177</b>
» Spherical Ground Joint Tube Fittings with GL Thread	<b>177</b>
» Straight for GL Thread	<b>106</b>
» Straight for GL Thread Ex	<b>120</b>
» Straight for metric Thread	<b>138</b>
» T for GL Thread	<b>106</b>
» T for GL Thread EX	<b>121</b>
» T for metric Thread	<b>139</b>
» Transition Fittings	<b>253</b>
» Tubing Connectors	<b>146-148</b>
Control Valves	<b>113, 142</b>
Cordless Pumps for Acids and Caustic Solutions	<b>270</b>
Corrugated Tubing	<b>159</b>
Colour Tubing	<b>160</b>
Couplings	
» Globe Stirrer Couplings	<b>23</b>
» Magnetic Stirrer Couplings	<b>43-46</b>
» Miniature Couplings	<b>243</b>
» Quick Connectors with GL Thread	<b>108</b>
» Threaded Couplings	<b>102</b>
» Universal Couplings	<b>246</b>
» Vario Couplings	<b>253</b>
Crucibles	<b>211</b>
Culture Bottles	<b>65</b>
<b>D</b>	
Digestion Vessels	<b>215-216</b>
Dipper Baskets	<b>214</b>
Dipper Vessels	<b>214</b>
Dirt Traps	<b>105</b>
Discs	
» Filtering Discs	<b>267</b>
» Washers	<b>168, 249</b>
Dishes	
» Evaporating Dishes made of PFA	<b>210</b>
» Evaporating Dishes made of PTFE	<b>209-210</b>
» Watch Dishes	<b>209</b>
Distillation Apparatus	<b>226-236</b>
Distillation Heads	<b>233</b>
Distillation Thermometers	<b>230</b>
Distributors	
» Distributors for Barrels	<b>90</b>
» Distributors for Canisters	<b>88-89</b>
» Distributors for GL 45 Thread	<b>76-80, 238-241</b>
» Distributors for GL 45 Thread EX	<b>122</b>
» Distributors for GL 32 Thread	<b>79</b>
» Distributors for GL 25 Thread	<b>79</b>
» Distributors for GLS 80 Thread	<b>86</b>
» Distributors for S 40 Thread	<b>79</b>
» Distributors for 38/430 Thread	<b>78</b>
» Distributors for HPLC	<b>238-241</b>
» Distributors for Reaction Vessels	<b>84-85</b>
» Distributors with Ground Joint	<b>178, 235</b>
» Distributors with metric Thread	<b>140</b>
» Distributors with Stirrer Bearing	<b>38</b>
» Distributors with Stopcocks	<b>77, 239, 241</b>
» Flexible Distributors	<b>80-81</b>
» Miniature Distributors	<b>243</b>
» Miniature Manifold Blocks	<b>245</b>

# Alphabetical Index

## E

Erlenmeyer Flasks	211
Evaporating Dishes	209-210
EX Distributors for Canisters	123
EX GL Reductions	124
EX Hose Connectors (with Nut)	124
EX Laboratory Screw Joints	119-210
EX Multiple Distributors for Barrels	123
EX Multiple Distributors for Bottles	122
EX Reactor Lids	132-133
EX Stirrer Shafts	128
EX Stopcocks	122
EX Temperature Probes	129
EX Tube Fittings	120-121

## F

Filters	
» Buchner Funnels	264
» Filter Adaptors for Syringes	265
» Filtering Discs	267
» Filtering Membranes	267
» Filtering Rods	268
» Filtering Tiles	268
» Flow Filters	262
» Frits for Suction Filters	266
» Pressure Pre-Filters	261
» Single-Stage Flow Filter	266
» Suction Filters	266
» Three-Stage Flow Filter	265
» Vacuum Filters	263
» Vacuum Filter Funnels	263
» Vacuum Trap	264
Fittings	106-109, 120-121, 138-141
Flanged Corrugated Tubing	158
Flanged Tubing	242
Flanging Tools	250
Flasks	
» Erlenmeyer Flasks	211
» Round Bottom Flasks	203-204
Flat Flange Distillation Apparatus	226-236
Flat Flange Gaskets	228
Flat Flange Joining Pieces	229
Flat Flange Lids	228
Flat Flange Reaction Vessels	
» Flat Flange Reaction Vessels made of PFA	228
» Flat Flange Reaction Vessels made of PTFE	228
Flat Sealing Tapes	165
Flexible Distributors	80-81
Flexible Tubing	125, 154
Flow Filters	262, 265-266
Fluoroplastic Grease Tubes	167
Fluoroplastic Sealing Paste	166
Fluoroplastic Spray	165
Fluorslidepaste	166
Fork Wrenches	74
Frits	261, 266
Funnels	
» Buchner Funnels	264
» Dropping Funnels	229
» Funnels	213
» Funnels with GL Thread	104
» Vacuum Filter Funnels	263

## G

Gas Inlet Tubes	261
Gaskets	
» double-sided	100
» Flat Flange Gaskets	228
» Gaskets for Screw Caps	100
» one-sided	99
» Spherical Ground Joint Sleeves	174

» SVL Gaskets	99
Gassing Stirrer with 4 Blades	26
GL Adaptors	82, 178, 236
GL Aeration	92
GL Dispenser	104
GL Funnels	104
GL Quick Connectors	108
GL Stopcocks	110, 111, 122
GL Thread Adaptor	108
GL Transition Fittings	254
GL Tube Fittings	106-109, 120-121
GL Valves	113
Glass Flange Metal Adaptors	179
Glass Stirrer Bearings	39
Globe Stirrer Couplings	23
G-Magnetic Stirrer Heads	43
Grease Tubes	167
Ground Joint Adaptors	176, 178
Ground Joint Distributors	178, 235
Ground Joint GL Stopcocks	110
Ground Joint Jars	208
Ground Joint Reducing Set	179
Ground Joint Sleeves	172
Ground Joint Swivelling Screw Fittings	101
Ground Joint Tube Fittings	144, 177, 234

## H

Heat Shrinkable Tubing	158
Hexagon Nuts	168
Hose Connectors	
» Hose Connectors GL made of PFA	114
» Hose Connectors GL made of PP	115
» Reducing Tubing Connectors	147
» Screw-In Tubing Connectors	148
» Tubing Connectors Cross	147
» Tubing Connectors Elbow	146
» Tubing Connectors	146
» Tubing Connectors T	146
» Tubing Connectors Y	147
HPLC Distributors	238-241, 243, 245
» Replacement Parts for HPLC Distributors	239
HPLC Stopcocks	244
HPLC Tubing	242, 250
Hydrolyzing and Digestion Vessels	215

## I

Inlet Tubes	261
Inner Parts for Laboratory Screw Joints	72
Inner Parts for Laboratory Screw Joints EX	119
Inner Parts for Laboratory Screw Joints HT	74
Inner Parts for Tube Fittings with metric Thread	144

## J

Jars	
» Jars	205, 216
» Jars with Ground Joint	208
Joining Fittings	252
Joining Pieces	229
Joint Clamps	174
Jumbo Magnetic Stirring Bar Retrievers	58

## L

Laboratory Screw Joints	71-75, 119-120
Leading-In for Sensors	197
Lids	
» Distributors for Reaction Vessels	84-85
» Flat Flange Lids	228
» Lids	207
» Reactor Lids for flat flange	220-221
Liebig Condensers	
» Liebig Condensers „Transparent“	229

# Alphabetical Index

» Liebig Condensers „Vacuum“	230	Pressure Relief Valves	112, 245
» Liebig Condensers „Vertical“	230	Probes	188-197
Liners for Digestion Vessels	215	Pumps	
Links	234	» Adaptors for Prominent Pumps	105, 254
Luer Connectors	246	» Cordless Pumps for Acids and Caustic Solutions	270
Luer-Lock Connectors	247	» Micro Magnet for Glass Pumps	272
		» Sampling Pump	271
<b>M</b>		<b>Q</b>	
Magnetic Stirrer Couplings		Quick Connectors GL	108
» Conductors for Magnetic Stirrer Couplings	44		
» G-Magnetic Stirrer Couplings	43	<b>R</b>	
» P-Magnetic Stirrer Couplings	45-46	Reaction Vessels	206, 228
» Stirrer Shafts for Magnetic Stirrer Couplings	44	Reactor Lids for flat flange	220-221
Magnetic Stirrer Heads		» Screw-in Stirrer Bearings	222
» Magnetic Stirrer Heads with Flange	42	» Screw-in Connector with Ground Joint	223
» Magnetic Stirrer Heads with Ground Joint	42	» Screw-in Fittings GL	222
Magnetic Stirring Bar Retrievers	58	» Screw-in Stopcocks	223
Magnetic Stirring Bars		» Screw-in Stopper	224
» Ball Magnetic Stirring Bars	62	Reactor Lids for flat flange EX	132-133
» Beakerliner	63	» Stirrer Bearings EX	134
» Center Magnetic Stirring Bars	61	» Screw-in Connectors GL EX	136
» Chamfer Magnetic Stirring Bars	62	» Screw-in Connector EX with Ground Joint	134
» Colour Magnetic Stirring Bars	59	» Screw-in Stoppers EX	136
» Crosshead Magnetic Stirring Bars	61	Receiver Adaptors	233
» Cylindrical Magnetic Stirring Bars	54	Reductions	
» Dumbbell-Shaped Magnetic Stirring Bars	60	» Ground Joint Reducing Set	179
» Egg-Shaped Magnetic Stirring Bars	56	» Reducing Screw Thread Adaptor Couplings	103
» Glass Magnetic Stirring Bars	59	» Reducing Tubing Connectors	147
» Magnetic Stirring Bars with Blade	63	» Reductions	103
» Magnetic Stirring Bars with Pivot Ring	55	» Reductions with GLS 80 Thread	87
» Power Magnetic Stirring Bars	57	» Reductions with metric Thread	140
» Square Magnetic Stirring Bars	54	Ring Wrench	91
» Star Magnetic Stirring Bars	62	Rods	
» Star Head Magnetic Stirring Bars	60	» Rods made of microporous PTFE	268
» Tandem Magnetic Stirring Bars	64	» Rods made of PTFE	164
» Triangular Magnetic Stirring Bars	56	Round Bottom Flasks	
» Ultra Magnetic Stirring Bars	57	» Round Bottom Flasks with GL Thread	204
Magnetic Stirring Bar Set	55	» Round Bottom Flasks with Ground Joint	203
Manifold Blocks	245	» Round Bottom Flasks with 3 Ground Joint Necks	204
Measuring Cylinders	208	» Round Bottom Flasks with 2 Ground Joint Necks	204
Membranes		Rupture Membranes for Digestion Vessels	216
» Filtering Membranes	267		
» Membranes for Pressure Compensation	93	<b>S</b>	
» Sealing and Rupture Membranes	216	“Safe-Lab” Nuts	235
Micro Reaction Vessels	206	Sampling Bags	213
Micro Scubber Bottles	201	» Connectors for Sampling Bags	213
Moon-Shaped Stirrer Blades	48-49	Sampling Pump	271
Multiple Distributors for Barrels	90	Scrapers	66
Multiple Distributors for Bottles	76-79, 122	Screw Caps	
Multiple Distributors with Ground Joint	178	» Screw Caps	97-98
		» Screw Caps for Laboratory Screw Joints	72
<b>N</b>		» Screw Caps for Laboratory Screw Joints EX	120
Narrow-Mouth Bottles with Conical Neck	202	» Screw Caps for Laboratory Screw Joints HT	75
Non-Return Valves	143	» Screw Caps High Chem	86
Nuts		» Screw Caps HT	98
» Hexagon Nuts	168	» Screw Caps with Aperture	96-98
» Nuts with metric Thread	144	Screw-In Adaptors	246
» “Safe-Lab” Nuts	235	Screw-In Tube Fittings	254, 141
		Screw-In Tubing Connectors	148
<b>O</b>		Screw Joints	
O-Rings		» Laboratory Screw Joints	71
» O-Rings for Laboratory Flat Flanges	180	» Laboratory Screw Joints EX	119
» O-Rings made of PTFE	180	» Laboratory Screw Joints HT	73
		» Swivelling Screw Fittings	102
<b>P</b>		» Swivelling Screw Fittings with Ground Joint	101
Paste	166	Screws	
Plugs	145, 249	» Screws with Countersunk Head	167
Plugs for Screw Caps	75	» Screws with Cylindrical Head	167
P-Magnetic Stirrer Heads	45-46	Scrubber Adaptors for Bottles	259
Pressure Digestion Vessels	215-216	Scrubber Bottles	200-201, 260
Pressure Pre-Filters	261		

# Alphabetical Index

Scrubber Columns	200	» Vacuum Stopcocks	234
Sealing Membranes for Digestion Vessels	216	Stoppers	
Sealing Paste	166	» Plugs	145, 249
Sealing Tapes	164	» Stoppers	176
Septum	100	Suction Filters	266
Sets for Pressure Compensation	93	SVL Gaskets	99
Sheets		Swivelling Screw Fittings	101-102
» Sheets made of FEP	163		
» Sheets made of PTFE	163	<b>T</b>	
Sleeves		Temperature Probes	
» Sleeves with Gripping Ring	173	» Adaptors for Temperature Probes	198
» Sleeves with Ribs	172	» Double Temperature Probes PT 100 Lemo Compact	189
» Spherical Ground Joint Sleeves	174	» Extension Cable for Temperatures Probes Lemo	198
Slip-On Baffle	26	» Slip-On Baffle	26
Snap Valves	143	» Temperature Probes PT 100	191, 231
Socket-GL Tube Fittings	177	» Temperature Probes PT 1000	194
Spatulas	66	» Temperature Probes K	196
Special Stirrer Bearings	39	» Temperature Probes K with SMP-Connector	196
Spherical Ground Joint-GL Tube Fittings	177	» Temperature Probes PT 100 Lemo	191-192
Spherical Ground Joint Sleeves	174	» Temperature Probes PT 100 Lemo Compact	190
Spiral Tubing	160	» Temperature Probes PT 1000 Lemo	194
Spray	165	» Total Immersion Probes PT 100	192
Stirrer Bearings		» Total Immersion Probes PT 100 Lemo	193
» Glass Stirrer Bearings	39	» Total Immersion Probes PT 1000	195
» Replacement Parts for Stirrer Bearings	40-41	» Total Immersion Probes PT 1000 Lemo	195
» Special Stirrer Bearings	39	Test Tubes	212
» Stirrer Bearings	38, 232	Thermo Beakers	211
» Ultra Stirrer Bearings	40	Thermoelectric Flanging Tools	250
Stirrer Blades	33-35, 48-50	» Flanging Tips	251
» Bolts and Clamp Rings	50	» Standard Construction Kits	251
Stirrer Couplings		» Tubing Holders	251
» Conductors for Magnetic Stirrer Heads	44	Thermometers	
» Globe Stirrer Couplings	23	» Distillation Thermometers	230
» Magnetic Stirrer Couplings	43-46	» Thermometers for Flasks	231
» Stirrer Shafts for Magnetic Stirrer Heads	44	Thermometer Holders	232
Stirrer Heads		Threaded Adaptors	82, 108, 236
» Magnetic Stirrer Heads with Flange	42	Threaded Couplings	102
» Magnetic Stirrer Heads with Ground Joint	42	Threaded Hose Connectors	114-115
Stirrer Shafts		Tiles	
» Centrifugal Stirrer Shafts	25	» Tiles made of microporous PTFE	268
» Discs Stirrer Shafts	29	» Tiles made of PTFE	162
» Double Impulse Stirrer Shafts	29	Total Immersion Probes	
» Double Moon-Shaped Stirrer Shafts	21	» Total Immersion Probes PT 100	192
» Fan-Shaped Stirrer Shafts	28	» Total Immersion Probes PT 100 Lemo	193
» Gassing Stirrer with 4 Blades	26	Transition Fittings	253
» GT Glass Stirrer Shafts	47	Tri-Clamp Components	281-183
» Impeller Stirrer Shafts	25	Tube End Fittings	254
» KPG Glass Stirrer Shafts	47	Tube Fittings	
» Maxi Propeller Stirrer Shafts	24	» with GL Thread	106-109, 254, 253
» Micro Surface Stirrer Shafts	31	» with GL Thread EX	120-121
» Mini Propeller Stirrer Shafts	31	» with metric Thread	138-141, 252
» Moon-Shaped Stirrer Shafts	20, 233	Tubing	
» Propeller Stirrer Shafts	20	» Antistatic Explosion-Proof Tubing	125-127
» Propeller Stirrer Shafts with 4 Blades	30	» Assortment of Remainder Tubing	161
» Solo Stirrer Shafts	32	» Capillary Tubing	161
» Stirrer Shafts with Blade	27	» Colour Tubing	160
» Stirrer Shafts with one Paddle	21	» Corrugated Tubing	159
» Stirrer Shafts with two Paddles	28	» Flanged Tubing	242
» U-Shaped Stirrer Shafts	22	» Flanged Corrugated Tubing	158
Stirrer Shafts with Reduced Chucking Diameter	36-37	» Flexible Tubing	154
Stirring Bar Retrievers	58	» Flexible Tubing EX	125
Stirring Bars	51-64	» Heat Shrinkable Tubing	158
Stopcocks		» Spiral Tubing	160
» Ball Valves with GL Thread	111	» Tubing made of FEP	156, 250
» Miniature 2-Way Stopcocks	244	» Tubing made of PFA	157, 250
» Miniature 3-Way Stopcocks	244	» Tubing made of PTFE	155, 250
» Stopcocks with GL Thread	110-111	» Zebra Explosion-Proof Tubing	127
» Stopcocks with GL Thread and Ground Joint	110	Tubing Connectors	146-148
» Stopcocks with GL Thread EX	122	Tubing Couplings	253
» Stopcocks with Hose Connectors	145	Tubing Cutter	162
» Stopcocks with metric Thread	142	Tubing Holders	251



# Alphabetical Index

Tweezers 65

## U

Ultra Stirrer Bearings 40

Universal Couplings 246

## V

Vacuum Filters 263

Vacuum Filter Funnels 263

Vacuum Stopcocks 234

Vacuum Trap 264

### Valves

» Control Valves with GL Thread 113

» Control Valves with metric Thread 142

» Miniature Pressure-Relief Valves 245

» Non-Return Valves 143

» Pressure-Relief Valves with Manual Ventilation 112

» Snap Valves 143

### Vessels

» Digestion Vessels 215-216

» Flat Flange Reaction Vessels 228

» Micro Reaction Vessels 206

» Dipper Vessels 214

Vials 206

## W

Wash Bottles 203

Washers 168, 249

Watch Dishes 209

Wide Mouth Bottles

## Z

Zebra Explosion-Proof Tubing 127





Best performance for your lab.

Fax  
**+49 (0) 93 46 - 92 86-51**

or by E-Mail:  
**inquiry@bola.de**

As a manufacturing company we can make products to your specifications. Please send us a drawing or a sketch together with answers to the questions listed below.

**Return this form with contact details by fax or e-mail and we will be in touch to discuss details and give you a free, no obligation quote.**

**Sender**

Company \_\_\_\_\_

Department \_\_\_\_\_

Contact person \_\_\_\_\_

Date and time to call \_\_\_\_\_


Address or P.O. Box \_\_\_\_\_

Postal Code and City \_\_\_\_\_

Phone / Fax \_\_\_\_\_

E-Mail \_\_\_\_\_

- » Please describe the product required. \_\_\_\_\_
- » What is the application? \_\_\_\_\_
- » Which are the critical dimensions and tolerances? \_\_\_\_\_
- » Please specify material requirements. \_\_\_\_\_
- » Please specify operating temperature range. \_\_\_\_\_
- » What is the chemical load? \_\_\_\_\_
- » Please state quantities. \_\_\_\_\_
- » What is the budgetary price range per piece? \_\_\_\_\_





## **BOLA**

A PRODUCT BRAND OF  
BOHLENDER GmbH  
Waltersberg 8  
D 97947 Grünsfeld

Phone: +49 (0) 93 46 - 92 86-0

Fax: +49 (0) 93 46 - 92 86-51

Mail: [info@bola.de](mailto:info@bola.de)

[www.bola.de](http://www.bola.de)

### Bank details:

Sparkasse Tauberfranken

Sort code: 673 525 65

Account No.: 4 013 611

IBAN: DE 57 673 525 650 004 013 611

BIC: SOLADES1TBB