

Fixed Bollard 900mm Above Ground 48mm -114mm Diameter Stainless Steel






The stainless steel range of 900mm tall Fixed Bollards are suitable for a range of applications.

The round bollards are available in sizes from 48mm to 204mm diameter stainless steel grade 304 tube. The Fixed Bollard is available with extended legs for casting into concrete or a flange plate for bolting down.

The Stainless Steel Fixed Bollard is ideal for situations where a high quality aesthetically pleasing way to mark boundaries is required.

Removable versions also available.

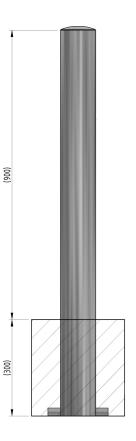

Part Number	Diameter and Fixing Detail	<u>Weight</u>
138 125 049	48mm Stainless Steel Grade 304 - Concrete In	3kg
138 125 050	48mm Stainless Steel Grade 304 - Bolt Down	3kg
138 125 060	60mm Stainless Steel Grade 304 - Concrete In	3kg
138 125 059	60mm Stainless Steel Grade 304 - Bolt Down	3kg
138 125 075	76mm Stainless Steel Grade 304 - Concrete In	4kg
138 125 074	76mm Stainless Steel Grade 304 - Bolt Down	4kg
138 125 090	89mm Stainless Steel Grade 304 - Concrete In	5kg
138 125 087	89mm Stainless Steel Grade 304 - Bolt Down	5kg
138 125 104	101mm Stainless Steel Grade 304 - Concrete In	6kg
138 125 110	101mm Stainless Steel Grade 304 - Bolt Down	6kg
138 125 117	114mm Stainless Steel Grade 304 - Concrete In	7kg
138 125 121	114mm Stainless Steel Grade 304 - Bolt Down	7kg

Product details

- 2mm wall thickness
- Concrete in 300mm (below ground)
- 3 bolts required per bollard (bolt down)

- Round flange plate 120mm x 5mm 48mm and 60mm diameters
- Round flange plate 150mm x 5mm 76mm and 90mm diameters
- Round flange plate 174mm x 5mm 101mm and 114mm diameters

Installation & use

Bolt down to a suitable concrete surface.

Telescopic, removable and concrete in are supplied with welded fixing spikes to ensure firm ground anchorage into concrete.

Telescopic, removable and concrete in require a suitable excavated hole for installing into concrete.

Products are guaranteed for 12 months (if installed and used correctly).



www.autopa.co.uk +44 (0)1788 550556

