


Fixed Bollard 750mm Above Ground 129mm - 204mm Diameter Stainless Steel

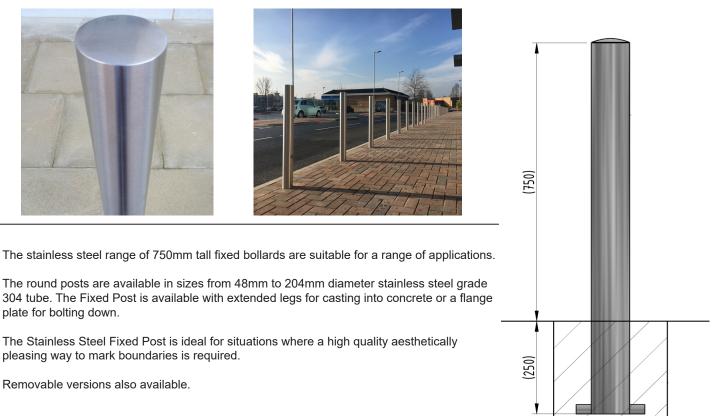

Part Number	Diameter and Fixing Detail	<u>Weight (kg)</u>
138 000 140	129mm Stainless Steel Grade 304 - Concrete In	6kg
138 000 141	129mm Stainless Steel Grade 304 - Bolt Down	6kg
138 000 145	139mm Stainless Steel Grade 304 - Concrete In	7kg
138 000 146	139mm Stainless Steel Grade 304 - Bolt Down	7kg
138 000 150	154mm Stainless Steel Grade 304 - Concrete In	7kg
138 000 150F	154mm Stainless Steel Grade 304 - Bolt Down	7kg
138 000 155	168mm Stainless Steel Grade 304 - Concrete In	8kg
138 000 156	168mm Stainless Steel Grade 304 - Bolt Down	8kg
138 000 160	204mm Stainless Steel Grade 304 - Concrete In	10kg
138 000 161	204mm Stainless Steel Grade 304 - Bolt Down	10kg

Product details

- 2mm wall thickness
- Concrete in 250mm (below ground)
- 3 bolts required per bollard (bolt down)

- Round flange plate 200mm x 5mm 129mm and 139mm diameters
- Round flange plate 250mm x 5mm 154mm and 168mm diameters
- Round flange plate 305mm x 5mm 204mm diameter

Installation & use

Bolt down to a suitable concrete surface. Telescopic, removable and concrete in are supplied with welded fixing spikes to ensure firm ground anchorage into concrete. Telescopic, removable and concrete in require a suitable excavated hole for installing into concrete. Products are guaranteed for 12 months (if installed and used correctly).



www.autopa.co.uk +44 (0)1788 550556

 bsi.
 ISO 9001:2015 Outlivenent
 ISO 14001:2015 Management
 ISO 14001:2015 Management
 ISO 45001 Mediational Mediational Management

 FM 31071
 EMS 503166
 OHS 552103

AUTOPA Limited Cottage Leap, Rugby, Warwickshire CV21 3XP