

Square Fixed Bollard 750mm Above Ground 90mm - 150mm Square Galvanised






The galvanised mild steel range of 750mm tall square fixed bollards are suitable for a range of applications and are ideal as a complement to the Autopa ranges of square Parking Posts, RemovaPosts and RetractaPosts.

The bollards are available in 50mm - 150mm square tube and come finished with a welded flat steel cap.

The Fixed bollard is available with extended legs for casting into concrete or a flange plate for bolting down.

Removable and colour coated versions also available.

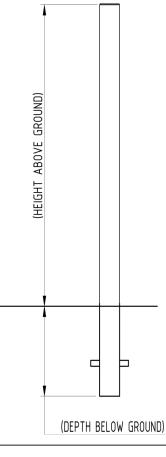

Part Number	Diameter and Fixing Detail	Weight (kg)
138 121 884	90 x 90mm Galvanised - Concrete In	8kg
138 121 884F	90 x 90mm Galvanised - Bolt Down	8kg
138 121 827	100 x 100mm Galvanised - Concrete In	9kg
138 121 827F	100 x 100mm Galvanised - Bolt Down	9kg
138 121 834	120 x 120mm Galvanised - Concrete In	18kg
138 121 834F	120 x 120mm Galvanised - Bolt Down	18kg
138 121 844	150 x 150mm Galvanised - Concrete In	23kg
138 121 844F	150 x 150mm Galvanised - Bolt Down	23kg

Product details

- 3mm wall thickness 90mm and 100mm Diameters
- 5mm wall thickness 120mm and 150mm Diameters
- Concrete in 250mm (below ground)

- 4 bolts required per bollard (bolt down)
- Square flange plate 140mm sq x 10mm 90mm diameter
- Square flange plate 250mm sq x 10mm 100mm to 150mm diameters

Installation & use

Bolt down to a suitable concrete surface.

Telescopic, removable and concrete in are supplied with welded fixing spikes to ensure firm ground anchorage into concrete.

Telescopic, removable and concrete in require a suitable excavated hole for installing into concrete.

Products are guaranteed for 12 months (if installed and used correctly).



www.autopa.co.uk +44 (0)1788 550556

