


## Heavy Duty Power Resistor Enclosures

### Dimensions

For Types BX40, BX75, BX275 & BX375.

Resistor Enclosures - Dimensions (mm)							
TYPE	A	B	C	D	E	F	G
BX40	182	300	133	168	208	38	4
BX75	182	430	153	168	335	38	4
BX275	510	315	187	495	225	40	5
BX375	510	500	187	495	410	40	5

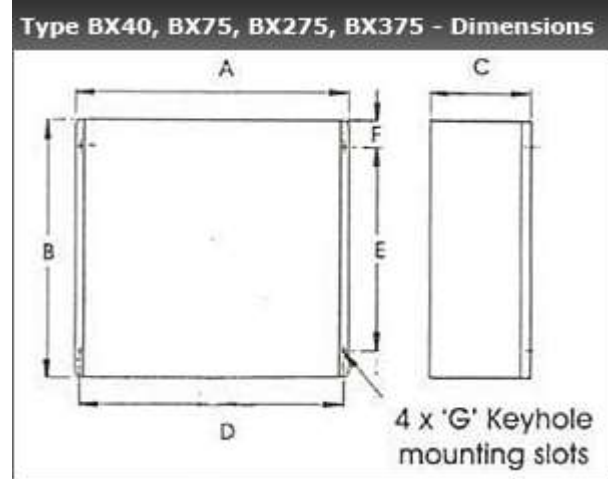

### Ohmic Values & Ratings - Continuous, Short Time & Intermittent

TYPE	CONT	SHORT TIME (SECONDS)			INTERMITTENT (MINUTES)						
		5	10	20	1/2	1	2	3	4	5	
		WATTS	WATTS	WATTS	WATTS	WATTS	WATTS	WATTS	WATTS	WATTS	WATTS
BX40/200	200	4000	3000	1800	1100	660	500	400	300	250	
BX40/300	300	6000	4500	2700	1650	990	750	600	450	375	
BX40/400	400	8000	6000	3600	2200	1320	1000	800	600	500	
BX75/450	450	9000	6700	4000	2500	1500	1130	900	690	570	
BX75/600	600	12300	9200	5500	3200	1930	1460	1170	880	740	
BX75/750	750	14700	11000	6600	4000	2420	1830	1460	1100	920	
BX75/1000	1000	20000	15000	9000	5320	3220	2440	1940	1460	1220	
BX275/1500	1500	29400	22000	13200	8000	4840	3660	2920	2200	1840	
BX275/2000	2000	40000	30000	18000	10650	6450	4880	3890	2930	2450	
BX375/3000	3000	58800	44000	26400	16000	9680	7320	5840	4400	3680	
BX375/4000	4000	80000	60000	36000	21300	12900	9760	7790	5870	4910	
				Operation Once Per Hour		Operating Time in any 15 Minute Period					

The Power in Watts to give a Temperature Rise of 300 °C in the Time stated.



**HVR Pentagon Limited**  
 Unit 2  
 Kings Road Industrial Estate  
 Tyseley  
 Birmingham B11 2AX  
 UK

Tel: + 44 (0) 121 773 2413  
 Fax: + 44 (0) 121 772 7322  
 Email: sales@hvrpentagon.com  
 Web: www.hvrpentagon.com