




Anglia Composites

Tread Covers, Nosings & Solid Plate

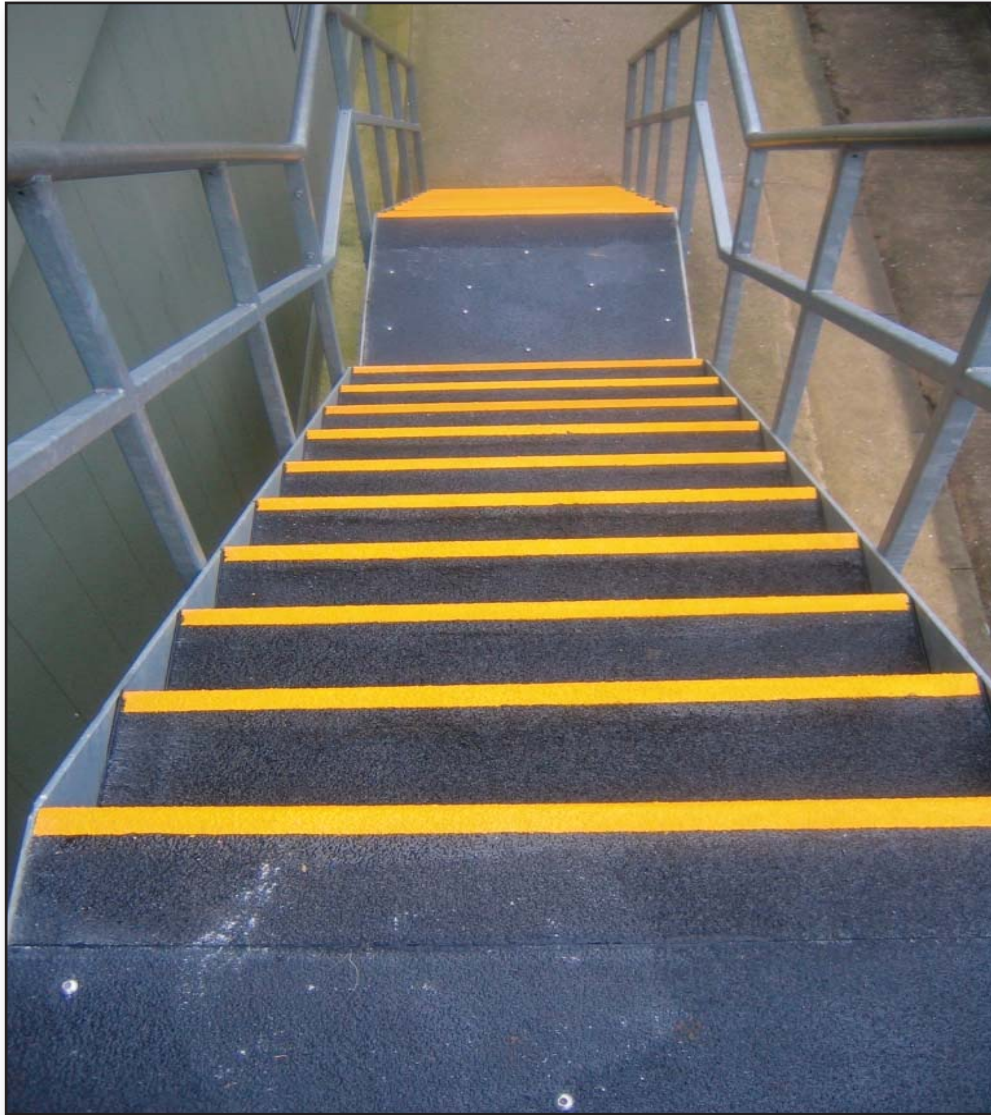

High performance, Corrosion Resistant GRP Tread Covers and Plate for Industry

Tread Covers



Anti-Slip Tread Covers are a simple and cost effective way to provide superior slip resistance on stair ways. They are extremely durable and completely corrosion resistant. They have a contrasting nosing for high visibility. Tread covers can be cut and drilled if required to your exact specification. Internal and external adhesives are available to complete the installation. Landing areas also available utilising our fibreglass plate.

Tread covers have a quartz gritted surface and conform to BS 7976-2 2002 Slip Resistance Test. covers and plate have achieved a rating considered to be "Better than excellent".



Amazing slip resistance

Corrosion resistant

Fast and easy to install

Installation service available

Cost effective

Chemical resistant

A nationwide installation service available if required. Tread covers and landing areas can be cut and drilled free of charge. If you are measuring your tread covers yourself then please remember the 'going' should be an internal measurement. Also allow a total of 5mm on the length of each tread to allow for fitting. Cut to any size up to 3000mm long x 300mm going.




Stair Tread Covers Installation Guide



Apply Adhesive

Before installation make sure the surface is clean, dry and free from any loose material. If you are fixing to concrete steps that are badly worn it may be necessary to effect minor repairs. Installation is improved if the surface is reasonably flat and smooth. Apply adhesive in beads or dabs. *See below for estimated adhesive usage.*

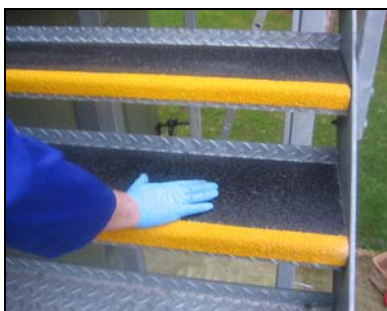

Set In Position

Set the cover in its final position by simply bedding it in. Apply pressure evenly over the whole tread.

Occasionally you may wish to screw the tread covers down instead of (or as well as) using adhesive. We can pre-drill and countersink your covers free of charge.



Seal Edges

Seal the edges to halt excessive moisture ingress with a black silicone sealant. We can supply adhesives for internal and external use. *Treads can be walked on after 6 hours.*

We can also supply sealants and stainless steel fixings if required.




Finished Stairs

Our tread covers are supplied cut to size. If you need to trim the covers on site then use a hard metal blade such as a Bosch **T141 HM** or similar. Landing areas can also be cut to size using larger sheets of gritted plate.


Adhesive usage

The amount of adhesive you need depends on the size of the cover and also the condition of the surface they are being bonded to. For a general guide for tread covers that are 250mm going and 1000mm wide, one 310ml tube will be needed for every three covers.

Anglia Composites Ltd. Call our sales hotline now – 01787 377 322

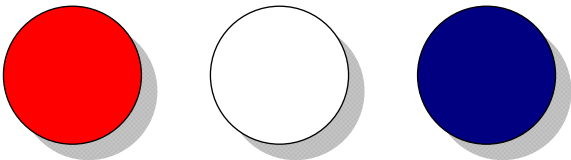

ANTI-SLIP FIBREGLASS GRITTED PLATE

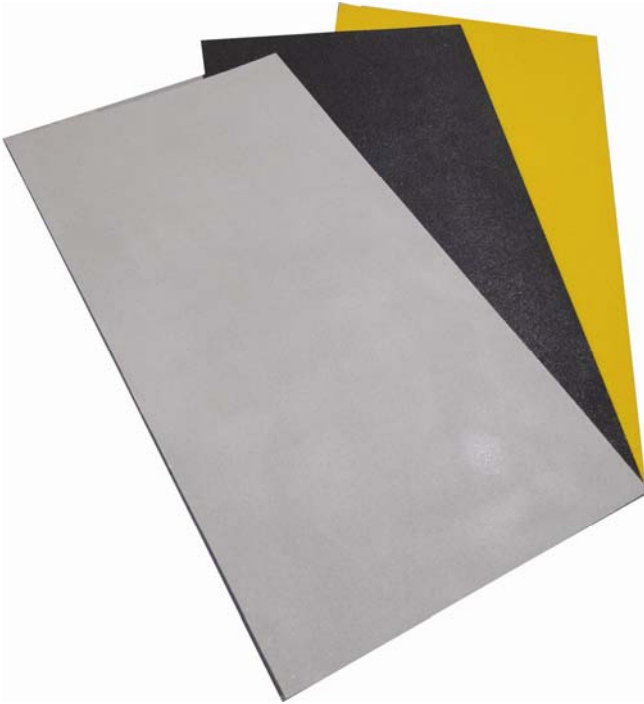

All sheets of plate have a gritted surface and conform to BS 7976-2 2002 Slip Resistance Test. Our plate has achieved a rating considered to be "Better Than Excellent" in both wet and dry conditions.

Sheets can be cut and drilled for you free of charge for easy installation. Powerful adhesives are also available for internal and external use.

If you are using adhesive, please make sure the surface is clean and dry. External adhesive is fast curing. You will have a maximum of 30 minutes depending on temperature. If you require your tread covers and plate to be pre-drilled please let us know what screw size you are using.



Technical Data

Thermal Conductivity	0.2 w/mk
Tensile Strength	123 mpa
Tensile Modulus	7.1 gpa
Flexural strength	193 mpa
Max Sheet Size	3.66m x 1.22m
Weight 4mm	4.8 kgs/m ²
Weight 10mm	12.3 kgs/m ²

We stock a range of plates in various colours, depths and panel sizes. Any colour and panel depth / size can be made to order.

Nosings and Rung Covers



From £3 each

Rung covers are an almost instant way to make a ladder safe. Anglia rung covers fit just about any rung size and can be installed in minutes using powerful fast curing adhesives.

Stair tread nosings are available from stock in any length up to 3000mm. Nosings are gritted for maximum slip resistance. They can be used in new build projects where they can be cemented into place or alternatively powerful internal and external adhesives are available for secondary fixing.



From £4 each



Anglia Composites Ltd - Unit 5 Stour Valley Business Centre - Brundon Lane
Sudbury - Suffolk - CO10 7GB

Tel: 01787 377 322 - Fax: 01787 377 433 - Mob: 07791 269 180

www.angliacomposites.co.uk - info@angliacomposites.co.uk