




Hooped Perimeter Barrier 90mm Diameter Stainless Steel, Concrete In

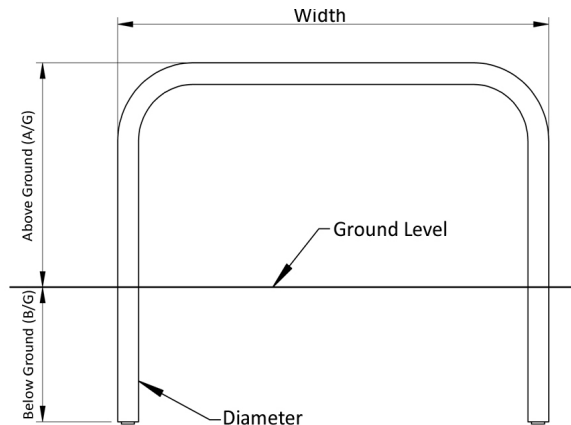

Perimeter Barriers are designed to help secure site perimeters and provide a permanent obstacle to vehicle access, to mark boundaries, define trolley parks and protect vulnerable door entrances and exits.

Suited to sites where aesthetics and security are equally important, perimeter barriers are commonly found outside car showrooms acting as protection for the cars on the forecourt without impeding a customer's view of the vehicles.

Available in a variety of heights and widths, available as concrete in, bolt down or removable for occasional access.

Galvanised, Stainless steel, galvanised and colour coated available.



Part Number	Description, Height above ground x overall width	Weight (kg)
138 205 441	500 x 750 Stainless Steel Grade 304 - Concrete In	8kg
138 205 439	500 x 1000 Stainless Steel Grade 304 - Concrete In	9kg
138 205 435	500 x 1500 Stainless Steel Grade 304 - Concrete In	11kg
138 205 431	500 x 2000 Stainless Steel Grade 304 - Concrete In	14kg
138 205 424	750 x 1000 Stainless Steel Grade 304 - Concrete In	11kg
138 205 420	750 x 1500 Stainless Steel Grade 304 - Concrete In	14kg
138 205 416	750 x 2000 Stainless Steel Grade 304 - Concrete In	16kg
138 205 409	1000 x 1000 Stainless Steel Grade 304 - Concrete In	14kg
138 205 405	1000 x 1500 Stainless Steel Grade 304 - Concrete In	16kg
138 205 401	1000 x 2000 Stainless Steel Grade 304 - Concrete In	18kg

Product details

- 2mm wall thickness
- Concrete in 300mm (below ground)
- Brushed finish

Installation & use

Bolt down to a suitable concrete surface.
Telescopic, removable and concrete in are supplied with welded fixing spikes to ensure firm ground anchorage into concrete.
Telescopic, removable and concrete in require a suitable excavated hole for installing into concrete.
Products are guaranteed for 12 months (if installed and used correctly).



www.autopa.co.uk
+44 (0)1788 550556

AUTOPA Limited
Cottage Leap, Rugby, Warwickshire CV21 3XP

