

## Keep cold and contaminated air outside

For industrial applications, Mark has the Easyair T200 in its product range. This industrial air curtain is available with 3, 4 or 5 fans, which can be combined to create the desired width. The air curtain is suitable for an installation height up to 8 metres.

The EASYAIR T200 blows the warm air located at the top of the room down to the occupied area. Therefore, for this type of air curtain no heat source is required. It works simple and efficiently!

### Features


- Economical
- Sharp pricing
- No maintenance required
- Speed controllable
- Low weight
- Easy installation
- Optional: vertical version
- Optional: gas-fired version

Optional: speed controlled low noise  
1~230V EC-motor with 0-10V control.

### Advantages:

- The highest efficiency in case of speed control
- Up to 50% energy saving in case of partial load
- Almost completely linearly adjustable
- Long lifetime
- Low noise level
- Integrated electronic thermal protection

## Dimensions

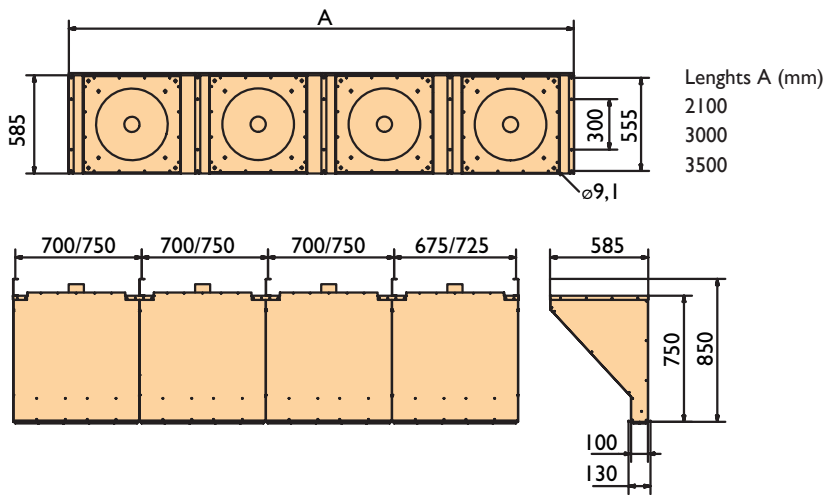


## Technical information

Type	Length	Air displacement	Connection voltage	Current	Weight	Mounting height
	mm	m <sup>3</sup> /h	V	A	kg	m
T200 provided with 3 fans	2100	11200	400	2,01	93	4-6
T200 provided with 4 fans	3000	14900	400	2,68	130	4-6
T200 provided with 5 fans	3500	18650	400	3,35	153	4-6

It is possible to combine the above mentioned Easyair T200 air curtains to create the desired length.

## Assembly/location suggestions



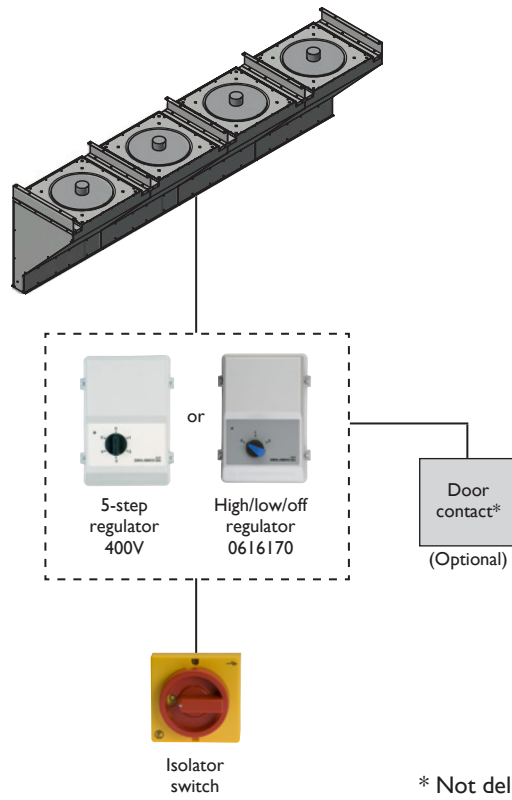

\* Not delivery by Mark.



**mark**<sup>®</sup>  
CLIMATE TECHNOLOGY  
FEELS BETTER, WORKS BETTER  
[WWW.MARKCLIMATE.COM](http://WWW.MARKCLIMATE.COM)

**Distributed by**  
Adremit Limited.  
Unit 5A Commercial Courtyard, Duke Street, Settle,  
North Yorkshire, United Kingdom. BD24 9RH  
T: +44 (0) 1729 824 108  
W: [www.puravent.co.uk](http://www.puravent.co.uk)  
E: [info@puravent.co.uk](mailto:info@puravent.co.uk)

