Ceiling heat recovery unit with an efficiency up to 86%

The Mark ERV is the ideal solution for energy efficient ventilation and a comfortable indoor climate. The appliance is equipped with a high efficiency counter flow heat exchanger with an heat recovery efficiency of 75-86%. This means that 75-86% of the energy expelled is supplied to the fresh intake air. This high efficiency means that in many cases no after-heating is required.

Possible applications for the ERV include offices, showrooms, apartment complexes and schools.


Characteristics

- High efficiency for optimal air comfort
- Exchange of heat and moisture
- Energy-saving BLDC motor with 10 speeds
- Innovative HR counter flow exchanger
- Low weight
- Indoor installation
- Automatic bypass, intelligently controlled by outside temperature
- Plug & play control, optional CO₂ and humidity control function, remote control and Modbus/BMS* control available
- ErP 2018 ready!
- * type 500 and 1000






Dimensions

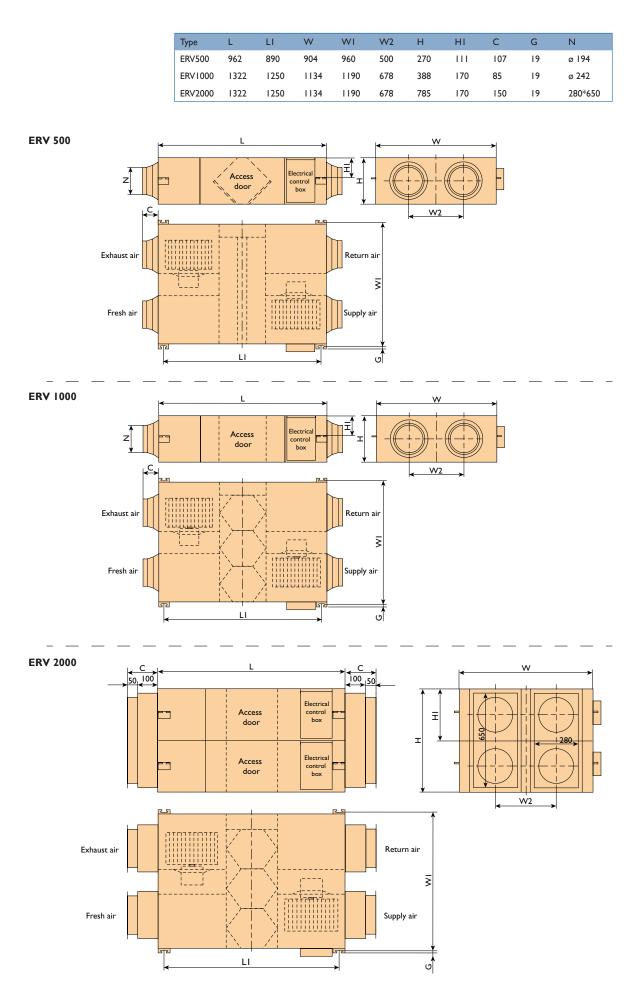

Technical information

Туре		500	1000	2000
Air amount	m3/h	500	1000	2000
External pressure	Pa	50	120	120
Cooling efficiency	%	62-74	65-74	65-74
Heating efficiency	%	67-75	71-78	71-78
Temperature efficiency	%	75-86	75-85	75-85
Noise level	dB(A)	39	43	51.5
Supply voltage	V	220	220	220
Power	W	88	243	486
Weight	kg	43	83	189

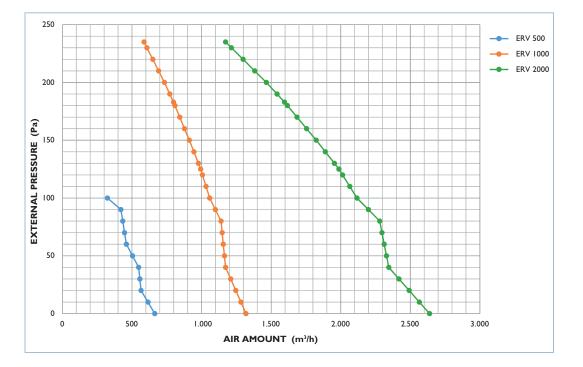





Distributed by Adremit Limited. Unit 5A Commercial Courtyard, Duke Street, Settle, North Yorkshire, United Kingdom. BD24 9RH T: +44 (0) 1729 824 108

W: www.puravent.co.uk

E: info@puravent.co.uk

