



Steel Door Solutions



Made In the UK



Steel Doors designed & built to the ideal requirements of your sector


The Pass door is a brilliant solution for access to your modular building, steel building or garage - or anywhere that needs a good looking, high performance entry door.

Inspiring confidence & trust


- Manufactured in the UK
- Fast turnaround and delivered throughout the UK & Ireland
- CE marked, certified product
- Innovation award winner with Patent Pending design



Steel Buildings



Modular Buildings



External Garages



Flush in Goosewing Grey



Linear Medium in Anthracite

9 fully finished colours, 4 styles



Colour

Choose a finish from our standard or wood effect colour palettes

Standard Colours

WHITE RAL 9016	BLACK RAL 9005	JUNIPER GREEN RAL 160 20 10	OLIVE GREEN BS 12 B 27	ANTHRACITE RAL 7016	VANDYKE BROWN BS 08 B 29	GOOSEWING GREY RAL 080 70 05
-------------------	-------------------	--------------------------------	---------------------------	------------------------	-----------------------------	------------------------------------

Wood Effect



Linear Large in White




Vertical Board in Golden Oak

Feature file - Award winning innovation

Dependable Security

The 3-pin dead bolt lock and four stainless steel hinges, with top and bottom hinges security-pinned, provide robust, dependable security.

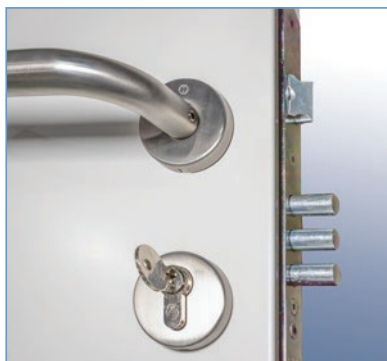

Durable, Stylish Security

The corrosion resistant stainless steel handle, lock, strike plate and hinges provide attractive and durably finished secure access.




3 keys as standard

Supplied with 3 keys as standard. Replacement keys can be duplicated from a standard blank at any locksmith.



Clever design

No rivets or welds to the front face of the door and colour matched frame as standard.

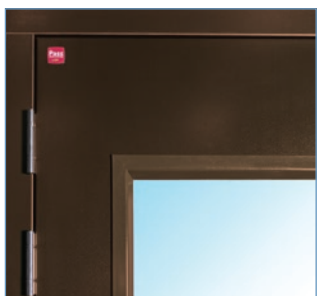

Low profile

Standard low-profile threshold with weatherseal makes it easy to move any wheeled item in or out. Open in or out options.





Year Warranty COMMERCIAL USE Year Warranty RESIDENTIAL USE



Pass door - inside view

The rear face of the door panel on all standard colour and wood effect doors is finished in a soft-white light reflecting finish. The frame will match the finish of the front face.

Shown above is a Goosewing Grey door from the inside - White inner face, Goosewing Grey Frame.




Seal strip

Inward opening doors include a threshold and seal strip onto which the door leaf closes. This helps to reduce water ingress under the door leaf.




All round weather seals

Q-Lon seals runs around the inside of the door frame and also helps to prevent water ingress around the door.

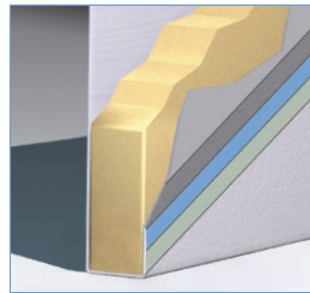


44mm Insulated door

44mm Insulated panel in exterior grade steel is factory coated and provides enhanced weather-beating performance.



Extra strength

Doors are pre-framed with four stainless steel hinges. Top and bottom hinges are security-pinned.

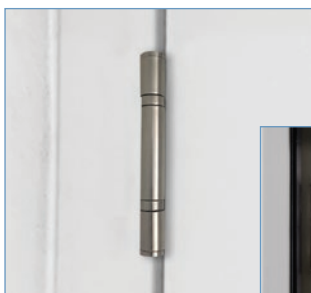

Smart fit

The Smart Fit frame fits in minutes and requires minimal finishing following installation.

External grade steel for

Superior quality




The Door Panel

The insulated door has a sandwich construction of twin corrosion protected steel skins filled with a 44mm insulating core. The rear of the door panel is finished in an off-white light reflecting finish.

Insulated Door Panel

- Sandwich Construction of Steel-Insulation-Steel
- Cold Rolled Steel Core
- Hot Dip Galvanisation
- Chemical Treatment
- Primer Coat
- Finishing Top Coat

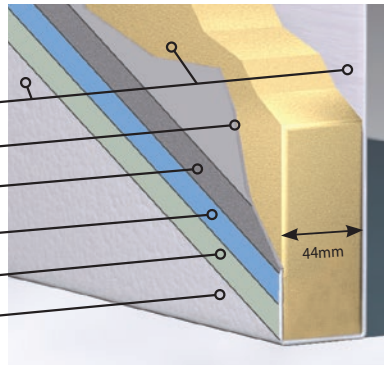

The rear face of the door panel on all standard colour and wood effect doors is finished in a soft-white light reflecting finish. The frame will match the finish of the front face. Shown here is a Goosewing Grey door from the inside - White inner face, Goosewing Grey Frame.


Pass door - inside view



Steel Buildings





Modular Buildings




External Garages

The best performance for your door

The area within the arc of the door's swing must be level or falling away to ensure the door can open unhindered.

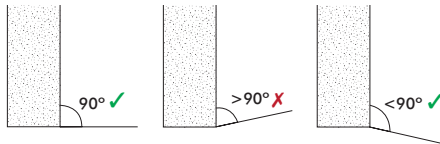

To help assist water draining away from the face the door and prevent water ingress there must be a rebate (minimum 10mm) high behind the door threshold or where the door seal meets a level floor. Without a floor rebate and the floor not sloping away from the external face of the door, it will be susceptible to water ingress as water will be unable to drain away effectively.



Options

Windows: Assembled with clear or wired toughened safety glass (Glass ABS 6206: 1981)



Vertical rectangle
250mm x 1200mm



Square
500mm x 500mm



Thumb turn.

Hardware

- Optional thumb turn
- Door closer

Please contact Pass Door Systems for details.



Door closer. Doors are prepared with reinforcing plates and nutserts for ease of installation.





MCC
MODULAR AND
PORTABLE BUILDINGS
TEL: 028 8075 7447
WWW.MCCBUILDINGSYSTEMS.COM

MCC MODULAR AND
PORTABLE BUILDINGS

The Pass Door Systems' door far exceeds anything we have fitted to date. Our fitting and finishing times have been significantly reduced as the door is designed specifically for modular requirements and the quality is excellent.

Modular & Portable Buildings





Automated manufacturing

Parametric design and a highly automated production facility ensures quality is consistently high and orders can be fulfilled with short lead times and quick delivery.



Raising Standards
Safety Assured



Unit 5 & 6, Woodside Road Industrial Estate,
Broughshane, BT42 4QJ
T: +44 (0) 28 25 44 69 30
E: info@passdoorsystems.com
Web: www.passdoorsystems.com

