

Pneumatic Tank Level Gauge



Model 40AG FSU Shown has a built-in overfill alarm

The PNEUMATIC TANK LEVEL gauge is a Model 40 has an internal pump, a timer circuit and is 230VAC mains powered, Option of 24VDC

Operation

The PNEUMATIC TANK LEVEL gauge uses the hydrostatic principle which has a simple and a proven reliability. This method requires minimum installation time and gives important advantages in the safe measurement of volatile liquids. The operation works by replacing liquid in the balance chamber (fitted into the tank) with air, while excess air escapes via the tanks vent. The resulting pressure in the balance chamber is indicated by the gauge and is proportionate to the head of liquid in the tank. The gauge can be mounted at any position, and may be disconnected from the tank at any time without upsetting the calibration. Maintenance is not normally required, as there are no moving parts external to the unit.

Calibration

Each gauge is individually calibrated and scaled to customer requirements for Rectangular, Cylindrical (Horizontal or Vertical) tanks in litre, gallon, kg, tonne etc.

Installation

The PNEUMATIC LEVEL contents gauge can be mounted in any convenient position up to 200m from the tank without affecting the reading. Installation is simple. Mount the unit with fixing screws and insert the balance chamber through a BSP tank boss on top of the tank allowing it to rest on the bottom, tighten bush and balance chamber connection. Connect the tube to the unit. There is no need to empty the tank. Once the mains or air supply is connected, after a short period, the gauge will read the true contents of the tank.

Dimensions

Unit: 300 H x 200 W x 130mm D

Indicator: 100mm or 160mm

Balance Chamber BC3 For 1" bsp Tank Boss Rigid

Construction:

BC3 is available as follows:

- (1) PVC
- (2) Polypropylene
- (3) PVDF

Metals

- (6) Copper
- (7) Stainless Steel

Maximum tube Length:- 200m

Pneumatic Tank Level Gauge

BC2 – Standard Balance Chamber

Construction: Brass with compression fitting for 6mm tubing

Also Available in: PVC (1) or Stainless Steel (7)

Viscosity Limit: 50 sec, redwood no.1 @ 16°

Requires a 1" bsp Tank Adaptor

BC2 Standard Brass balance chamber

BC2-1 PVC balance chamber



BC1 – as BC2 but with Magnet

Construction: As BC2 but with attached magnet to stabilize the balance chamber in position when tank is being filled.

Requires a 1 ½" bsp Tank Adaptor

Magnet for Standard balance chamber




BC3 – Rigid Balance Chambers

Construction: PVC (1), Copper (6) or Stainless Steel (7).

Requires a 1" bsp Tank Adaptor

Made to customer requirements

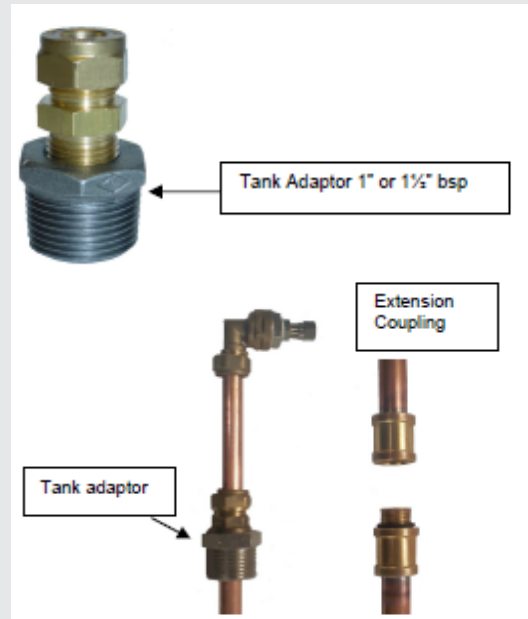

For use with - Models 28PU, 28PUE, 36, 37, 38, 39, 40 & 45