

Tel: 0121 585 8730 Fax: 0121 585 5128 Email sales@sponmech.co.uk

Access Safety Fencing Stock List 2020



- Strong Budget Range 20x20 RHS Frame, 100x20x3mm Mesh
- High Level Panels gives O/A fence height of 2020mm (120mm air gap at bottom)

Standard

hinged door

• **Conforms To:** BS EN ISO 14120:2015 General requirements for the design, construction and selection of fixed and movable guards

Panel Sizes

1900	X	250
1000	T 7	100

- 1900 X 400
- 1900 x 500
- 1900 x 600
- 1900 x 700
- 1900 x 800
- 1900 x 1000
- 1900 x 1200
- 1000 H 1200

Access Doors

SINGLE SWING DOOR

Standard hinged door complete with top rail, hinges and inside/outside locking handle based on 800mm wide standard panel. 940mm o/a width including posts.

Fully assembled and ready to fit.

Optional interlocks supplied and fitted, or free issue locks can be fitted.

Single SLIDING DOOR

With top rail. 1400mm opening. Fully assembled and ready to fit. Complete with inside/outside locking handle.

Includes adjacent 1500 wide panel + 3 60x60 posts, total length of unit 3080mm.

Drawing of Sliding Door available on page 2 of this document.


Other door options include:

Bi-fold, Counterbalanced rise & fall and Cantilever Doors. All to proven standard design.



<u>Posts</u> 40 x 40 x 2020Lg 60 x 60 x 2020Lg

SPONNECH SAFETY SYSTEMS

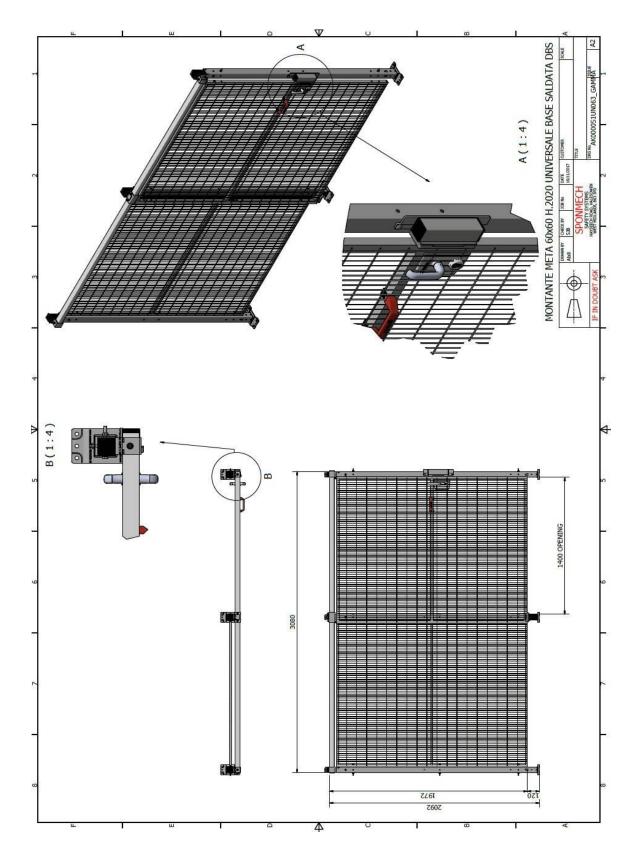

Sponmech Safety Systems Ltd.