


 **INCINER8**
WWW.INCINER8.COM

INCINER8 I8-1000A TECHNICAL DATASHEET



The flagship model within our agricultural lineup is the i8-1000A, it is the biggest machine within our agricultural range and took over three years to develop. The i8-1000A is at the forefront of combustion technology and offers impressive burn rates and large batch sizes while still achieving some of the lowest emissions in its class. The i8-1000A can be customised with viewing windows, external cladding and automatic loading to provide an effective and sustainable waste disposal solution for many different types of agricultural waste. The i8-1000A also has the benefit of being fitted with our NX PLC control panel including smartpanel technology allowing operators to remotely monitor performance and diagnose any issues should they occur.

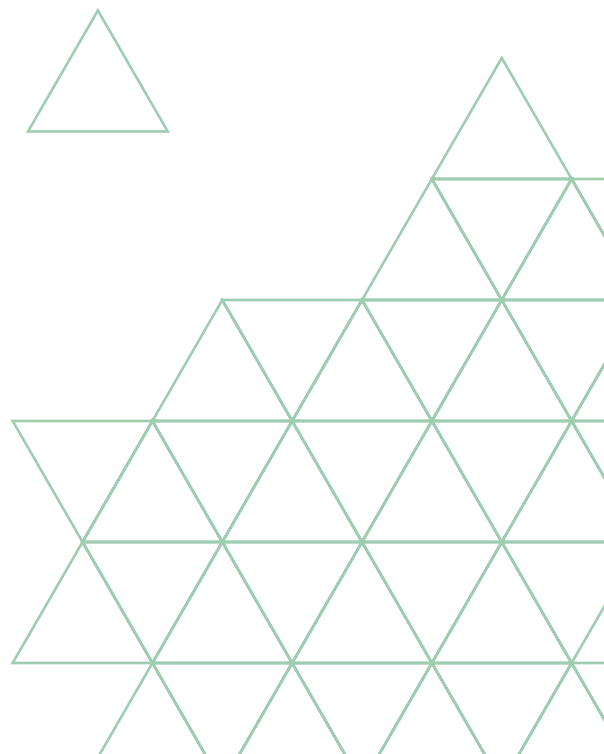

LOAD CAPACITY

Inciner8 uses four main size guides within our comprehensive range to differentiate our models, from S to XL. This allows us to provide you with a machine that perfectly fits your needs and your waste stream.



CORETEX INSULATION

Coretex insulation - Triple insulation Coretex technology uses a combination of high-density insulation board, custom refractory concrete and thick steel to deliver the ultimate incineration insulation.



TOP LOAD

Top loading allows the waste to be dumped in from above making it easy to access for trucks and machinery. It also allows additional extras such as bin tippers and autoloaders to be used within the operation to improve efficiency and incineration times.



HYDRAULIC DOOR

We manufacture our incinerators from heavy-duty steel, hydraulic doors are fitted to some of our larger models to make it easy and effortless to open and close the chamber doors via the control panel making light work of continuous loading.



SMARTPANEL REMOTE MONITORING

Smartpanel remote monitoring is an optional feature that allows users to access the control panel remotely, away from the incinerator. This allows access and technical support from anywhere in the world, allowing data and controls to be viewed by who needs it the most.

Designed and manufactured in Britain to ISO 9001 accredited quality assurance standards. Our machines are widely used across a wide range of sectors, in the UK and around the world, including municipal waste management, manufacturing, mining, and hospitality, as well as tackling serious waste management challenges, including controlled drug disposal, humanitarian response and marine waste.



i8-1000A FEATURES

- Fully insulated chamber to retain heat and improve combustion
- Rapid, complete and efficient waste disposal
- Patented safety handle for easy access to chamber
- High quality refractory lining and insulation
- Easy to use CE7 control panel
- Programmable temperature control for complete combustion
- Secondary chamber* with 2 second retention time
- Fast pre-heat and continual high temperature performance
- Low energy consumption levels

* Our primary and secondary combustion chambers are constructed from superior grade steel and state-of-the-art monolithic concrete refractory with a unique concave design to prevent cold spots and maximize heat retention during the start-up and combustion processes. When the secondary burner is activated a flame curtain is created which ensures the thermal decomposition of smoke and harmful emissions to produce a clean, odourless vapour exiting the chimney stack.

TECHNICAL BREAKDOWN

model: i8-1000A

HT THERMOCOUPLES

Independent control of primary and secondary temperatures via the control panel.

SECONDARY CHAMBER

Retains and re-burns the exhaust gases for minimum of 2 seconds at 850°C.

CHIMNEY STACK

Stainless steel stack for longevity. Fitted with a Velocity Cowl as standard.

PRIMARY CHAMBER

Chamber designed for maximum air flow and circulation which in turn improves efficiency and total burn time.

SAFE USE HANDLES

Easy to open and close loading door. Designed to increase operator safety.

COOL TOUCH CLADDING

Steel cladding to reduce risk of infection and increase longevity of system.

LOW NOX BURNERS

These are some of the cleanest, most efficient burners available today. These can be supplied as gas or oil fired.



HOW INCINERATION WORKS

Incineration is a waste treatment process which utilizes the combustion of organic substances contained within materials to convert waste into ash, heat and flue gas. The ash residue is mostly formed by inorganic constituents of the waste which may take the form of solid lumps or powder.

Heat produced by the incineration process can be fed into a heat exchanger to produce hot water or air which can be used for cleaning or heating purposes. The remaining flue gases are passed through pollution control devices in the form of a secondary combustion chamber or additional filtration (if required) and then expelled to atmosphere.

APPLICATIONS

Our versatile range of medical incinerators are designed for a wide range of waste types. This particular model benefits from a front loading design and very simple operation process. Ideal as a stand-alone machine where limited staff are available to operate.

- All forms of animal by-products
- Soiled animal bedding
- Pet cremation
- Out of date / cross contaminated feeds
- Small slaughterhouse/abattoir waste
- Catteries & kennels
- Hunt & Game waste
- Stable & Stud Farm
- Emergency Outbreaks



For additional information, or to speak to one of our expert team:

Call
+44 (0) 1704 884020

Email
sales@inciner8.com

 **INCINER8**
www.inciner8.com

TECHNICAL SPECIFICATION

model: i8-1000A

OPERATIONAL SPEC

Combustion Chamber Volume (m ³)	8.70m ³
Burn Rate (Kg p/h)	Up to 800Kg
Fuel Consumption (Ltrs p/hour)	40-50 ltrs
Time To Temp	45-60 mins
Gas retention Time (Seconds)	2 secs
Loading Method	Top Load
Fuel Options	Light Oil or Gas/LPG
Electricity Supply	110v or 230v
Control Panel (IP Rating)	IP55
Heat Recovery	Yes
Auto Ash Removal	Yes
Auto Loader Compatible	Yes
Remote Monitoring	Yes
Ash Residue	3-5%
Recommended Operational Temperature	850°C

PHYSICAL SPEC

Assembled L/W/H (mm)	6900 x 2900 x 6260
Assembled Weight (Kg)	24000kg
Door Size (mm)	4000 x 1500mm
Thermocouples (Qty)	7
Steel Thickness (mm)	4mm
No. Of Burners	7
Refractory Composition	Coretex
Operating Footprint	58.41m ²
Cool Touch Cladding	Yes
Viewing Portal	No
Tertiary Air Fan	No

*The above figures are guidelines ONLY.

Ecoflam burners are renowned worldwide for providing high efficiency and reliable operation with significant energy savings and feature extreme ease of installation, maintenance and flexible boiler-burner matching. This model is fitted with low NOx burners as standard to ensure a complete and clean burn cycle, this reduces installation time and maintenance.

ECOFLAM BURNER SPECIFICATIONS

PARAMETER (1/2 HR AV)	LIMITS	MEASURED*
Total Dust	30mg/m ³	12mg/m ³
Sulphur Dioxide	200mg/m ³	2.4mg/m ³
Nitrogen Dioxide	400mg/m ³	60mg/m ³
Carbon Monoxide	100mg/m ³	78.3mg/m ³

*The above figures are guidelines ONLY.

Ecoflam

- MAX 1-12 have electrical frequency 50-60 Hz
- High efficiency fan ventilation system (HPV)
- Low NOx version class 3 with yellow flame
- Designed in compliance with current regulations
- ISO 9001 and VISION 2000 certification
- All burners are fire tested

NB: picture for illustration purposes only



AVERAGE EMISSIONS / EU STANDARDS

All of our secondary combustion chambers are designed to operate at 850 - 1200°C to re-burn waste gases which prevents smoke, odours and harmful emissions. Dioxins and similar gaseous components are destroyed by a combination of homogeneous high temperatures, excess oxygen levels and sufficient gas residence time in the secondary chamber which our incinerators achieve.

Emissions are largely a product of the waste materials therefore care should be taken when selecting the most appropriate method of pollution control to ensure compliance with your local emissions standards, please discuss this with our sales team if you aren't sure.

**CALL INCINER8 AND START BUILDING SOLUTIONS
TO YOUR WASTE CHALLENGES TODAY!
+44 (0) 1704 884020 OR
EMAIL SALES@INCINER8.COM**

For additional information, or to speak to one of our expert team:

Call
+44 (0) 1704 884020

Email
sales@inciner8.com

 **INCINER8**
www.inciner8.com