



CMR Electrical Ltd
Bolton House
Five Chimneys Lane
Hadlow Down
East Sussex
TN22 4DX
Tel: 01825 733600

Single or Two Zone Alarm Annunciators type AS2




Unit Shown Full Size

The AS range of Alarm Annunciators have been designed to advise operators or security staff of any plant room or environmental faults. The unit can interface to any plant containing volt free alarm or fault contacts such as air conditioning plant, water detection systems, generators or UPS systems.

The unit as standard interfaces to Normally Open volt free contacts, but on request can be changed at our factory to any combination of open/closed contacts.

Complete with an audible warning device, mute push button, flashing 8mm red alarm lamp and 8mm Control live green lamp, on units fitted with the sensor monitoring circuit additional 8mm red (fault) / green (Normal) lamps are fitted to each zone.

All AS units have a common alarm set of volt free contacts and an open collector output for onward signalling to Building Management Systems, telephone dialler or control systems.

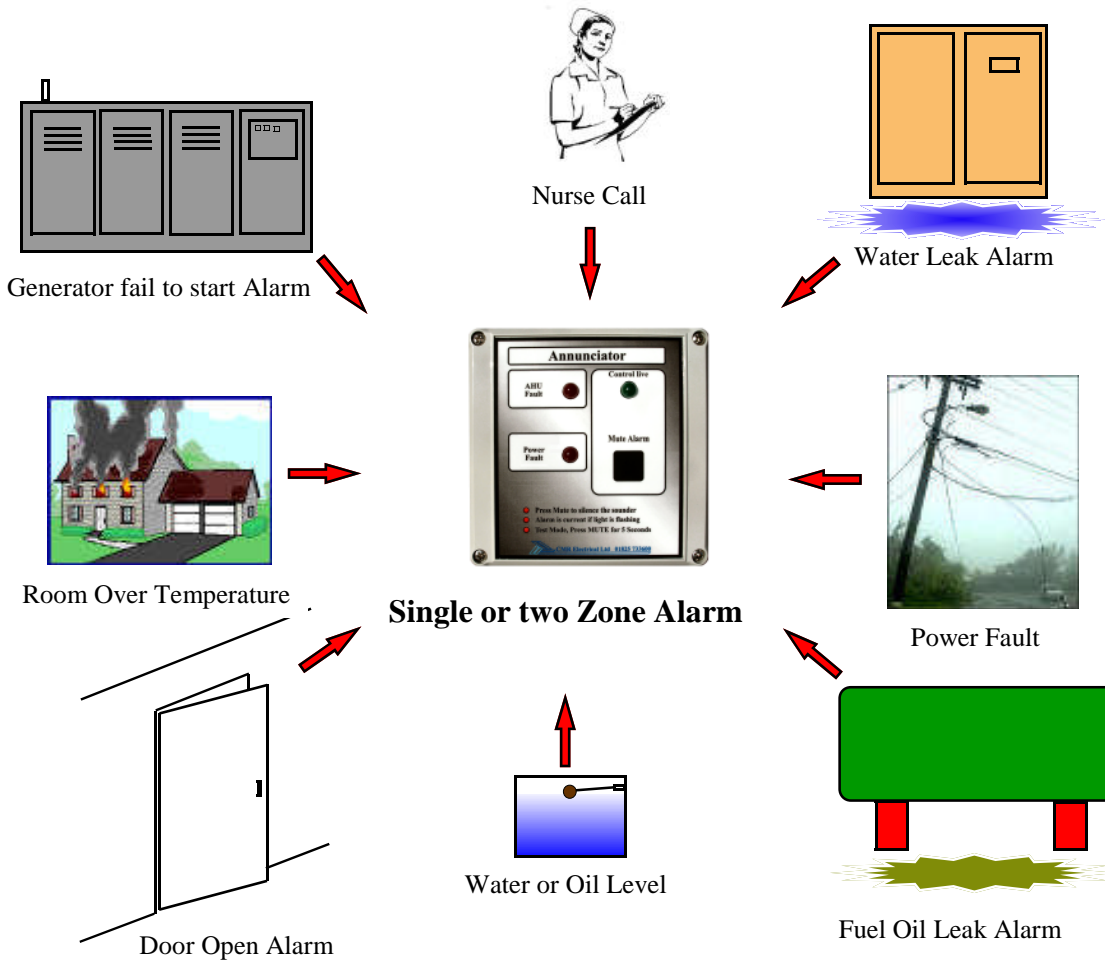

Features

- Large indication LED lamps for ease of Alarm identification from a distance
- On board audible warning device to alert local operators of a problem
- Alarms latched until Mute operated to give indication of transient Alarms
- Individual zone alarm relays to onward signal to a BMS
- Lamps, relay and Horn test Facility to ensure that the unit is working correctly
- Small size foot print, wall or surface mounted

Specification

Housing type	ABS Plastic
Mounting	Wall, flush or surface
Size	122mm wide x 120mm high x 58mm deep
Colour	Light grey
Input power	50 Hz single phase 230VAC +/- 10%
Burden	< 3VA
Power termination	Internal 3 way terminal block
Voltage to plant contacts	12VDC
Connections to plant	Internal terminal block
Access	Top, bottom or back
Output contacts	1 x Volt Free 3 amp changeover