

Plain Round Bollard 1200mm Above Ground 139mm - 219mm Diameter Galvanised






AUTOPA's range of Plain Round Bollards offers a simple and cost effective means of establishing control over parking and access. Plain Round Bollards are ideal for use around pedestrian precincts, pavements, play and parking areas, as part of traffic calming measures, pedestrianisation schemes and as a deterrent to ram-raiders.

The complete range of Plain Round Bollards is available in diameters from 90mm to 219mm and is available with extended legs for casting into concrete or with a flange plate for bolting down.

Colour coated and removable versions are also available.

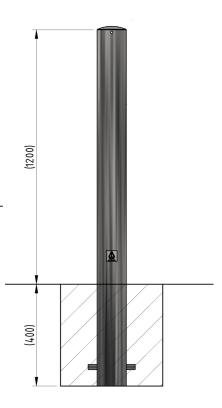

Part Number	<u>Description</u>	Weight (kg)
138 121 610	139mm Galvanised - Concrete In	27kg
138 121 607	139mm Galvanised - Bolt down	27kg
138 121 712	168mm Galvanised - Concrete In	30kg
138 121 709	168mm Galvanised - Bolt down	30kg
138 121 812	193mm Galvanised - Concrete In	37kg
138 121 806	193mm Galvanised - Bolt down	37kg
138 121 907	219mm Galvanised - Concrete In	43kg
138 121 916	219mm Galvanised - Bolt down	43kg

Product details

- 5mm wall thickness
- Concrete in 400mm (below ground)
- 4 bolts required per bollard (bolt down)

Square flange plate – 250mm sq x 10mm – 100mm to 150mm diameters

Installation & use

Bolt down to a suitable concrete surface.

Telescopic, removable and concrete in are supplied with welded fixing spikes to ensure firm ground anchorage into concrete.

Telescopic, removable and concrete in require a suitable excavated hole for installing into concrete.

Products are guaranteed for 12 months (if installed and used correctly).



www.autopa.co.uk +44 (0)1788 550556

