

Fixed Bollard 900mm Above Ground 129mm - 204mm Diameter Stainless Steel






The stainless steel range of 900mm tall Fixed Bollards are suitable for a range of applications.

The round bollards are available in sizes from 48mm to 204mm diameter stainless steel grade 304 tube. The Fixed Bollard is available with extended legs for casting into concrete or a flange plate for bolting down.

The Stainless Steel Fixed Bollard is ideal for situations where a high quality aesthetically pleasing way to mark boundaries is required.

Removable versions also available.

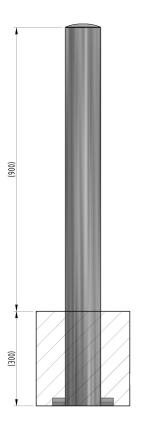

| Part Number | Diameter and Fixing Detail | Weight (kg) |
|-------------|---|-------------|
| 138 125 123 | 129mm Stainless Steel Grade 304 - Concrete In | 7kg |
| 138 125 124 | 129mm Stainless Steel Grade 304 - Bolt Down | 7kg |
| 138 125 142 | 139mm Stainless Steel Grade 304 - Concrete In | 8kg |
| 138 125 143 | 139mm Stainless Steel Grade 304 - Bolt Down | 8kg |
| 138 125 157 | 154mm Stainless Steel Grade 304 - Concrete In | 9kg |
| 138 125 155 | 154mm Stainless Steel Grade 304 - Bolt Down | 9kg |
| 138 125 169 | 168mm Stainless Steel Grade 304 - Concrete In | 10kg |
| 138 125 174 | 168mm Stainless Steel Grade 304 - Bolt Down | 10kg |
| 138 125 201 | 204mm Stainless Steel Grade 304 - Concrete In | 12kg |
| 138 125 199 | 204mm Stainless Steel Grade 304 - Bolt Down | 12kg |

Product details

- · 2mm wall thickness
- Concrete in 300mm (below ground)
- 3 bolts required per bollard (bolt down)

- Round flange plate 200mm x 5mm 129mm and 139mm diameters
- Round flange plate 250mm x 5mm 154mm and 168mm diameters
- Round flange plate 305mm x 5mm 204mm diameter

Installation & use

Bolt down to a suitable concrete surface.

Telescopic, removable and concrete in are supplied with welded fixing spikes to ensure firm ground anchorage into concrete.

Telescopic, removable and concrete in require a suitable excavated hole for installing into concrete.

Products are guaranteed for 12 months (if installed and used correctly).



www.autopa.co.uk +44 (0)1788 550556



