


Plain Round Bollard 1200mm Above Ground 139mm - 219mm Diameter Galvanised & Yellow

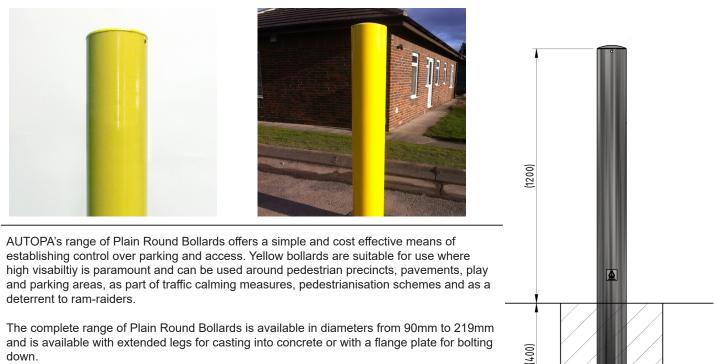

Additional colour coated options and removable versions are also available.

| <u>Part Number</u> | Description | <u>Weight (kg)</u> |
|--------------------|---|--------------------|
| 138 121 620Y | 139mm Galvanised & Yellow - Concrete In | 27kg |
| 138 121 614Y | 139mm Galvanised & Yellow - Bolt Down | 27kg |
| 138 121 712Y | 168mm Galvanised & Yellow - Concrete In | 30kg |
| 138 121 733Y | 168mm Galvanised & Yellow - Bolt Down | 30kg |
| 138 121 807Y | 193mm Galvanised & Yellow - Concrete In | 37kg |
| 138 121 801Y | 193mm Galvanised & Yellow - Bolt Down | 37kg |
| 138 121 907Y | 219mm Galvanised & Yellow - Concrete In | 43kg |
| 138 121 916Y | 219mm Galvanised & Yellow - Bolt Down | 43kg |

Product details

5mm wall thickness

- Square flange plate 250mm sq x 10mm 127mm to 193mm diameters
- Square flange plate 400mm sq x 10mm 219 diameter

Concrete in 400mm (below ground)
4 bolts required per bollard (bolt down)

Installation & use

Bolt down to a suitable concrete surface. Telescopic, removable and concrete in are supplied with welded fixing spikes to ensure firm ground anchorage into concrete. Telescopic, removable and concrete in require a suitable excavated hole for installing into concrete. Products are guaranteed for 12 months (if installed and used correctly).



www.autopa.co.uk &44 (0)1788 550556

bsi, 9001:2015 Quality ment FM 31071 EMS 503166 OHS 552103

AUTOPA Limited Cottage Leap, Rugby, Warwickshire CV21 3XP