

RWM 75 Twin Chamber Baling Press

Take control and convert your dry recyclable packing waste into manageable bales. Recyclers and industrial users of a Riverside vertical baler benefit from waste volume reduction; storage, handling and transportation savings; avoidance of ever-increasing landfill charges; the satisfaction of environmental benefits and even possibly the generation of an additional revenue yield.



RWM 75 Twin Chamber Baling Press

- ✓ 12 month warranty
- ✓ For light use in small shops, Hotels and light industrial applications
- ✓ Additional chambers available
- ✓ Ideal for volume reduction of cardboard and plastic
- ✓ 700 x 500mm top loaded feed aperture for easy loading
- ✓ Can be sited outside
- ✓ 13amp single phase electrics
- ✓ 3.5 Tonne press force
- ✓ 2 Polyester bale tying for a secure bale
- ✓ Supplied with a free bale trolley
- ✓ Bale weights up to 75kg
- ✓ CE approved
- ✓ Fitted retaining claws to prevent material spring back
- ✓ Full stroke ram
- ✓ Powder coated finish for durability



RWM 75 Twin Chamber Baling Press

TECHNICAL SPECIFICATIONS

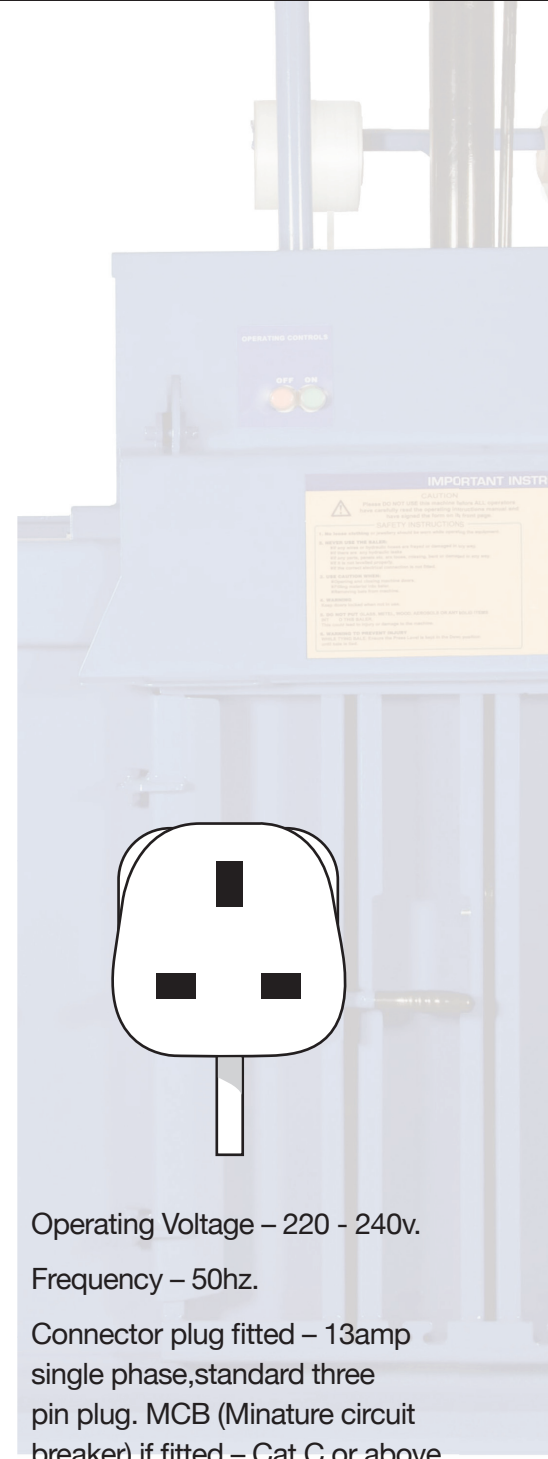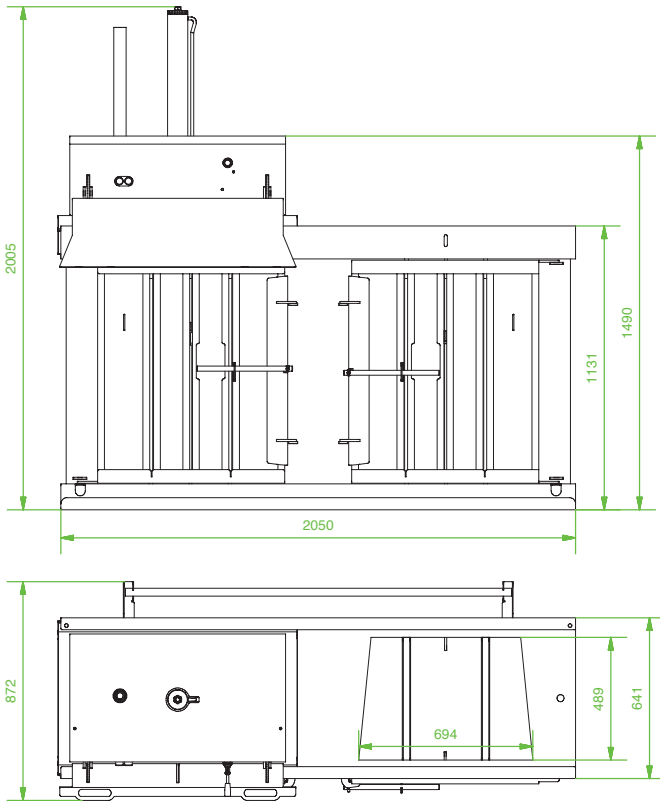

Press Force	3.5 Tonnes
Loading Aperture (W x D)	700 x 500mm
Bale Weight	up to 75 Kg
Bale Dimensions (H x W x D)	1000 x 700 x 500mm
Cycle Time	35 seconds
Noise	72 decibels
Machine weight	562 Kg
Power Supply (kW-V-Hz)	13amp 1.5kW-230V-50Hz
Overall Dimensions (H x W x D)	2005 x 2050 x 872mm
Optional Transportation Height	1500mm

Operating Voltage – 220 - 240v.

Frequency – 50hz.

Connector plug fitted – 13amp single phase, standard three pin plug. MCB (Minature circuit breaker) if fitted – Cat C or above.