

# Top quality metalwork at best prices!

Special discounts on orders over £350! Email us with code 'DIS'  
FREE delivery on orders over £150. Usual delivery 2-4 days.  
PRICES EX VAT. No discount or free delivery on farm/field gates or related accessories.




T: 01424 844702 or 07971 882 241  
E: sales@ironfinals.co.uk

Interactive PDF  
- just click to  
navigate



KEY CLAMP HANDRAILS

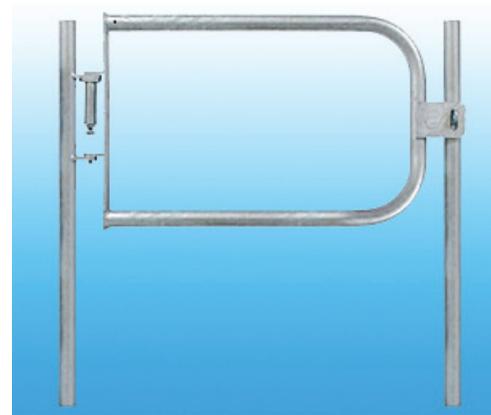

FABRICATED SAFETY GATES



DISABLED ACCESS RAILS



WARM GRIP HANDRAIL



ROOF EDGE PROTECTION



FLOORING & STAIRTREADS



FARM & FIELD GATES

## KEY CLAMP HANDRAILS

Handrails, clamps, tube, angles & connectors, plus other components.

Key clamp fittings and galvanised tube are the ideal solution for easy construction of all safety railings, barriers, guardrails, stair rails and handrails. They are also suitable for a wide variety of easily assembled structures such as climbing frames, platforms, stages and heavy duty storage racks.

Or create your own 'industrial chic' style furniture such as a key clamp table and bench, key clamp bed, shelving or clothes rail!

Spending more than £350? Give us a call for your special discount!



### GALVANISED TUBE

Available in various lengths: 1.044m to 6.5m

#### TUBE SIZES

A Tube: 26.9mm dia

B Tube: 33.7mm dia

C Tube: 42.4mm dia

D Tube: 48.3mm dia

E Tube: 60.3mm dia



### TOP 1

Long Tee  
(For A/B/C/D/E Tube)



### TOP 3

Corner  
(For A/B/C/D/E Tube)



### TOP 7

Swivel Tee  
(For A/B/C/D/E Tube)



### TOP 11

Ramp Tee Section  
(For D Tube)



### ELBOW 1

90° Elbow  
(For A/B/C/D/E Tube)



### ELBOW 2

Variable Elbow  
(For B/C/D Tube)



### ELBOW 11

Ramp 90° Elbow  
(For D Tube)



### MIDDLE 1

Intersection  
(For A/B/C/D/E Tube)



### MIDDLE 2

Side Tee  
(For A/B/C/D/E Tube)



### MIDDLE 3

Corner Intersection  
(For A/B/C/D/E Tube)



### MIDDLE 5

Variable Intersection  
30°-45° (For B/C/D Tube)



### MIDDLE 6

Adjustable Intersection  
(For A/B/C/D/E Tube)



### MIDDLE 7

Swivel Intersection  
(For A/B/C/D Tube)

[GO TO WEBSITE](#)

[MAIN MENU](#)

[< PREVIOUS PAGE](#)

[NEXT PAGE >](#)

# KEY CLAMP HANDRAILS



**MIDDLE 8**  
Side Intersection  
(For A/B/C/D/E Tube)



**MIDDLE 9**  
90° Swivel Intersection  
(For B/C/D Tube)



**MIDDLE 11**  
Ramp Intersection  
(For D Tube)



**MIDDLE 12**  
Ramp Tee  
(For D Tube)



**BASE 1**  
Tall Base  
(For A/B/C/D/E Tube)



**BASE 2**  
Wall Base  
(For A/B/C/D/E Tube)



**BASE 3**  
Side Base  
(For B/C/D Tube)



**BASE 4**  
Triangular Side Base  
(For B/C/D Tube)



**BASE 5**  
Wall Swivel Side Base  
(For A/B/C/D/E Tube)



**BASE 6**  
Side Base  
(For B/C/D Tube)



**BASE 7**  
Wall Handrail Base  
(For B/C/D Tube)



**BASE 8**  
Ground Base  
(For B/C/D Tube)



**BASE 9**  
Cover Shield  
(For B/C/D Tube)



**BASE 10**  
Wall Base Only



**BASE 11**  
Ramp Tall Base  
(For D Tube)

[GO TO WEBSITE](#)

[MAIN MENU](#)

[< PREVIOUS PAGE](#)

[NEXT PAGE >](#)

# KEY CLAMP HANDRAILS



## CROSSOVER 7

Crossover  
(For A/B/C/D/E Tube)



## CROSSOVER 8

Crossover 6 way  
(For A/B/C/D/E Tube)



## CROSSOVER 9

Clamp on Crossover  
(For A/B/C/D Tube)



## CROSSOVER 10

Crossover with outlet  
(For A/B/C/D/E Tube)



## CONNECTOR 1

External Connector  
(For A/B/C/D/E Tube)



## CONNECTOR 2

Internal Connector  
(For B/C/D Tube)



## CONNECTOR 3

Single Mesh Clip  
(For A/B/C/D Tube)




## CONNECTOR 4

Double Mesh Clip  
(For B/C/D Tube)



## CONNECTOR 5

Clamp on Tee  
(For B/C/D/E Tube)



## CONNECTOR 6

Clamp Spigot  
(For B/C/D Tube)



## SUPPORT

Locking Collar  
(For B/C/D Tube)



## HINGE 7

Eye Part  
(For B/C/D Tube)



## HINGE 8

Hook Part  
(For B/C/D Tube)



## HOOK 9

Chain Hook Part  
(For B/C/D Tube)



## PLUG

End Cap  
(For A/B/C/D/E Tube)


[GO TO WEBSITE](#)

[MAIN MENU](#)

[< PREVIOUS PAGE](#)

[NEXT PAGE >](#)

# KEY CLAMP HANDRAILS



**ADJUSTABLE SHORT TEE**  
(For B/C/D Tube)



**CLAMP ON TEE**  
(For A/B/C/D/E Tube)



**RAILING SIDE SUPPORT HORIZONTAL**  
(For B/C/D Tube)




**RAILING SIDE SUPPORT VERTICAL BASE**  
(For B/C/D Tube)



**INTERNAL SWIVEL TEE**  
(For B/C/D Tube)



**SHORT TEE GRADIENT**  
(For C/D Tube)



**CLAMP ON CROSSOVER**  
(For A/B/C/D/E Tube)



**90° CROSSOVER**  
(For A/B/C/D/E Tube)



**COMBINATION SOCKET TEE**  
(For A/B/C/D/E Tube)




**DOUBLE SWIVEL COMBO**  
(For A/B/C/D Tube)



**DOUBLE MALE SECTION**  
(For A/B/C/D/E Tube)



**CORNER SWIVEL**  
(For A/B/C/D Tube)



**IN-LINE SWIVEL FITTING**  
(For B/C/D Tube)



**TOEBOARD ADAPTOR**  
(For D Tube)



**90° CORNER SWIVEL MALE**  
(For A/B/C/D Tube)

[GO TO WEBSITE](#)

[MAIN MENU](#)

[< PREVIOUS PAGE](#)

[NEXT PAGE >](#)

# KEY CLAMP HANDRAILS



**FEMALE SWIVEL  
SECTION**  
(For C/D Tube)



**45° TEE**  
(For B/C/D Tube)



**EAVES FITTING**  
(For D Tube)



**RIDGE FITTING**  
(For D Tube)



**ADJUSTABLE FIXING  
BRACKET**  
(For C/D Tube)



**ADD ON SHORT TEE**  
(For C/D Tube)



**ADD ON CROSSOVER**  
(For C/D Tube)



**ADJUSTABLE SHORT  
TEE 30-60°**  
(For B/C/D Tube)



**ADJUSTABLE 2  
SOCKET CROSS 30-45°**  
(For B/C/D Tube)



**ANGLE BASE FLANGE  
11-30°**  
(For C/D Tube)



**THREE SOCKET TEE  
11-30°**  
(For C/D Tube)




**TWO SOCKET CROSS  
11-30°**  
(For C/D Tube)



**HBEND25113 RETURN  
BEND 33.7MM**  
300mm legs. Self colour.



**HBEND25124 STAIR  
RETURN BEND 33.7MM**  
400mm legs. Self colour.



**HBEND25135 HANDRAIL  
RAMP BEND 33.7MM**  
500mm legs. Self colour.

[GO TO WEBSITE](#)

[MAIN MENU](#)

[< PREVIOUS PAGE](#)

[NEXT PAGE >](#)

## KEY CLAMP HANDRAILS



**HBEND25143 HANDRAIL  
90° BEND 33.7MM**  
300mm legs. Self colour.



**HBEND25213 HANDRAIL  
STANDARD RETURN  
BEND 33.7MM. 25NB.**  
300mm legs. Galvanised.



**HBEND25214  
HANDRAIL STANDARD  
RETURN BEND 33.7MM**  
400mm legs. Galvanised.



**HBEND25224 HANDRAIL  
STANDARD STAIR  
RETURN BEND 33.7MM**  
400mm legs. Galvanised.



**HBEND25235  
HANDRAIL STANDARD  
RAMP BEND 33.7MM**  
500mm legs. Galvanised.



**HBEND25243  
HANDRAIL STANDARD  
90° BEND 33.7MM**  
300mm legs. Galvanised.



**HBEND32213 HANDRAIL  
STANDARD RETURN  
BEND 42.4MM 32NB.**  
300mm legs. Galvanised.



**HBEND32224 HANDRAIL  
STANDARD STAIR  
RETURN BEND 42.4MM**  
400mm legs. Galvanised.



**HBEND32243  
HANDRAIL STANDARD  
90° BEND 42.4MM**  
300mm legs. Galvanised.

[GO TO WEBSITE](#)

[MAIN MENU](#)

[< PREVIOUS PAGE](#)


[NEXT PAGE >](#)

# KEY CLAMP HANDRAILS

Handrail slope fittings  
For railings required on slopes and ramps between 0-11°.

Available to suit tube 'D' (Ø48.3mm).

NB. The tolerance on standard fittings is between 3-5°.

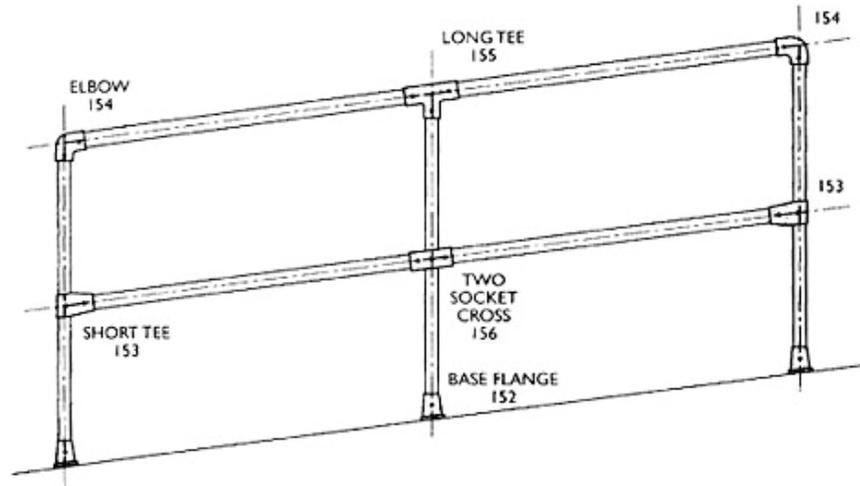

**BASE FLANGE FOR SLOPE UP TO 11°**

Fits 'D' tube only



**SHORT TEE FOR SLOPE UP TO 11°**

Fits 'D' tube only



**ELBOW FOR SLOPE UP TO 11°**

Fits 'D' tube only



**LONG TEE FOR SLOPE UP TO 11°**

Fits 'D' tube only



**TWO SOCKET CROSS FOR SLOPE UP TO 11°**

Fits 'D' tube only



**KEY CLAMP GRUB SCREWS**

(For A/B/C/D/E Tube)

[GO TO WEBSITE](#)

[MAIN MENU](#)

[< PREVIOUS PAGE](#)

[NEXT PAGE >](#)



**KEY CLAMP ALLEN KEY**

(For A/B/C/D/E Tube)

## KEY CLAMP HANDRAILS



### **GALVANISED TUBE HANDRAIL STANDARD 2B-550-550**

10mm flat drilled  $\varnothing 18$  holes  
for M16 bolts  
(For B/C/D Tube)



### **GALVANISED TUBE HANDRAIL STANDARD 3C-550-550**

12mm flat drilled  $\varnothing 18$  holes  
for M16 bolts  
(For B/C/D Tube)



### **GALVANISED TUBE HANDRAIL STANDARD 4D-550-550**

10mm flat drilled  $\varnothing 18$  holes  
for M16 bolts  
(For B/C/D Tube)

[GO TO WEBSITE](#)

[MAIN MENU](#)

[< PREVIOUS PAGE](#)

[NEXT PAGE >](#)

## KEY CLAMP HANDRAILS



Adjustable Railings -  
Galvanised

The pivot point offers  
an adjustable angle  
to handrail standards,  
allowing for instant  
installation of handrail on  
slopes, so no more waiting  
for the fabrication of  
costly raked standards.

Load tested.

No fabrication of raked  
specials required.

Flexible on site  
adjustment.



**ADJUSTABLE RAIL  
FHB2B**  
(For B/C Tube)



**ADJUSTABLE RAIL  
FHB3C**  
(For B/C Tube)



**ADJUSTABLE RAIL  
FHB4D**  
(For B/C Tube)

[GO TO WEBSITE](#)

[MAIN MENU](#)

[< PREVIOUS PAGE](#)

[NEXT PAGE >](#)


## KEY CLAMP HANDRAILS

Pre-assembled safety posts for 'C' tube

These pre-assembled tube clamp posts help reduce installation time.

They are supplied in a standard height of 1100mm and constructed using 'C' tube (Ø42.4mm).

Used in conjunction with tube cross rails of 1450mm, they conform to Building Regulations.




**1603001C END POST ASSEMBLED**

'C' tube 1100mm ø42.4



**1603002C MIDDLE POST ASSEMBLED**

'C' tube 1100mm ø42.4



**1603003C CORNER POST ASSEMBLED**

'C' tube 1100mm ø42.4

[GO TO WEBSITE](#)

[MAIN MENU](#)

[< PREVIOUS PAGE](#)

[NEXT PAGE >](#)


## KEY CLAMP HANDRAILS

Pre-assembled safety posts for 'D' tube

These pre-assembled tube clamp posts help reduce installation time.

They are supplied in a standard height of 1100mm and constructed using 'D' tube (Ø48.3mm).

Used in conjunction with tube cross rails of 1450mm, they conform to Building Regulations.




**1603001D END POST ASSEMBLED**

'D' tube 1100mm ø48.3



**1603002D MIDDLE POST ASSEMBLED**

'D' tube 1100mm ø48.3



**1603003D CORNER POST ASSEMBLED**

'D' tube 1100mm ø48.3

[GO TO WEBSITE](#)

[MAIN MENU](#)

[< PREVIOUS PAGE](#)


[NEXT PAGE >](#)

## PREFABRICATED SAFETY GATES



### FABRICATED SAFETY GATE & 2 POSTS - L/H

33.7mm Tube - Self Closing FSG-LH-33



### FABRICATED SAFETY GATE & 2 POSTS - R/H

33.7mm Tube - Self Closing FSG-RH-33



### FABRICATED SAFETY GATE & 2 POSTS - L/H

42.4mm Tube - Self Closing FSG-LH-42



### FABRICATED SAFETY GATE & 2 POSTS - R/H

42.4mm Tube - Self Closing FSG-RH-42



### RUBBER GATE BUMP STOP

Dia 20mm x L 25mm



### HINGE KIT FOR SAFETY GATE - STAINLESS HKFSG-SS

Weld To Round S/S Tube Sections

- Adjustable closing speed
- Plate with slotted pin
- Plate with pin hole
- Plain plate
- Spring and lock nut
- M8 x 20 countersunk screws
- Washers



### HINGE KIT FOR SAFETY GATE - STAINLESS HKFSG-T

Weld To Tubular Sections

- Adjustable closing speed
- Plate with slotted pin
- Plate with pin hole
- Plain plate
- Spring and lock nut
- M8 x 20 countersunk screws
- Washers



### HINGE KIT FOR SAFETY GATE - STAINLESS HKFSG-SQ

Weld To Square Section

- Adjustable closing speed
- Plate with slotted pin
- Plate with pin hole
- Plain plate
- Spring and lock nut
- M8 x 20 countersunk screws
- Washers



### HINGE KIT FOR SAFETY GATE 25SGH

Weld To Tubular Sections



### HINGE KIT FOR SAFETY GATE 25SGHS

Weld To Square Sections

[GO TO WEBSITE](#)

[MAIN MENU](#)

[< PREVIOUS PAGE](#)

[NEXT PAGE >](#)

## DISABLED ACCESS RAILS

Disabled Access Range

The DDA Range is designed to meet the requirements of part 'M' of the Building Regulations 2004 regarding provisions for disabled people.

The DDA range conforms to the requirement for smooth continuous handrail using 42.4mm O/D galvanised tube.

The Building Regulations state the rail shall be between 40 and 45mm O/D.

All fittings are cast iron and galvanised to BS EN ISO 1461.

Suitable for stairs, ramps and walkways.

For uprights use Type D tube (48.3mm). For horizontals use Type C tube (42.4mm).



**DDA01  
UPRIGHT CONNECTOR**



**DDA02  
HANDRAIL CURVE**



**DDA03  
WALL BRACKET**



**DDA04  
INTERMEDIATE BRACKET**



**DDA05  
END RETURN**



**DDA06  
90° BEND**



**DDA07  
INTERNAL CONNECTOR**



**DDA08  
END CAP**



**DDA09  
ADJUSTABLE BEND**

[GO TO WEBSITE](#)

[MAIN MENU](#)

[< PREVIOUS PAGE](#)

[NEXT PAGE >](#)

# WARM GRIP HANDRAIL

This is the only truly 'warm to touch' handrail system that meets the DDA, Part 'M' Building Regulations.

This high quality PVC coated handrail system is designed for ease of construction.


It is quick and easy install and needs no adhesive.

No additional thermal painting or powder coating is needed because the high quality PVC coating ensures minimal heat conductivity away from the hand.

The system utilises flush fitting handrail components, making it a truly smooth continuous handrail with no uneven or awkward joints. Additionally, the PVC coated steel tube handrail benefits from a raised profile pattern to improve grip.

This revolutionary 'warm to touch' modular handrail system combines maximum flexibility with minimal maintenance. It is weather resistant and UV stable, ensuring it looks good and serves its purpose for many years to come. The system is an ideal external or internal safety rail for industrial or commercial environments with load testing and certification to 0.75kn.

All components of the system are available in high visibility yellow or grey.

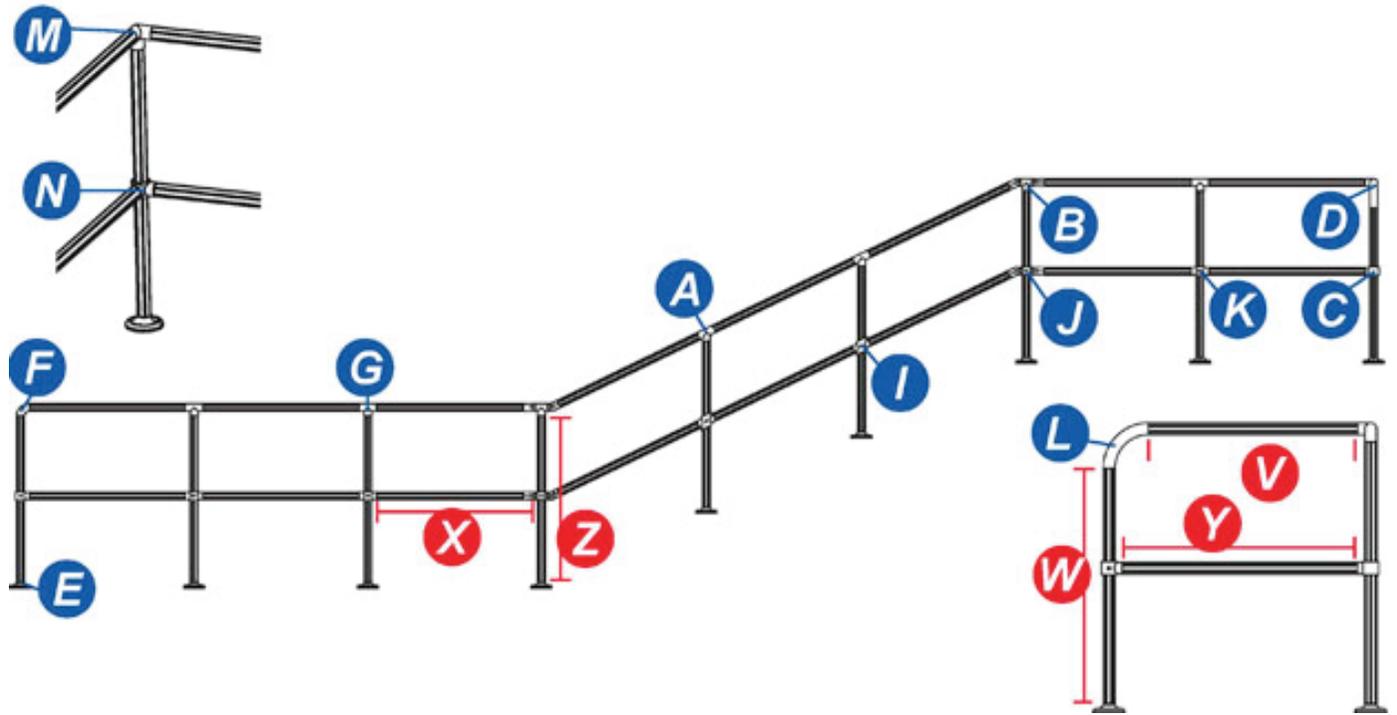

[GO TO WEBSITE](#)

[MAIN MENU](#)

[< PREVIOUS PAGE](#)

[NEXT PAGE >](#)



**A: 63° TEE**  
(YELLOW OR GREY)



**B: ADJUSTABLE TEE**  
(YELLOW OR GREY)



**C: MID RAIL SINGLE**  
(YELLOW OR GREY)



**D: ADJUSTABLE CONNECTOR**  
(YELLOW OR GREY)



**E: BASE FOOT FLANGE**  
(YELLOW OR GREY)

# WARM GRIP HANDRAIL



**F: 90° ELBOW**  
(YELLOW OR GREY)



**G: 90° TEE**  
(YELLOW OR GREY)



**H: SIDE MOUNT BRACKET**  
(YELLOW OR GREY)



**I: 63° MID RAIL DOUBLE**  
(YELLOW OR GREY)



**J: ADJUSTABLE MID RAIL DOUBLE**  
(YELLOW OR GREY)



**K: MID RAIL DOUBLE**  
(YELLOW OR GREY)



**L: HAND RAIL END**  
(YELLOW OR GREY)



**M: 3 WAY ELBOW**  
(YELLOW OR GREY)



**N: MID RAIL CORNER**  
(YELLOW OR GREY)



**SCROLL END**  
(YELLOW OR GREY)



**WALL MOUNTED TEE**  
(YELLOW OR GREY)



**WALL MOUNTED ELBOW**  
(YELLOW OR GREY)



**ADJUSTABLE MID RAIL SINGLE**  
(YELLOW OR GREY)



**V/X/Y: WARMAGRIP HANDRAIL**  
(YELLOW OR GREY)



**W/Z: WARMAGRIP POSTS**  
(YELLOW OR GREY)

[GO TO WEBSITE](#)

[MAIN MENU](#)

[< PREVIOUS PAGE](#)

[NEXT PAGE >](#)

## ROOF EDGE PROTECTION

Safety railing system using counterweights & curved or straight posts.



### GALVANISED 'D' TUBE

Available in various lengths: 1.044m to 6.5m  
D Tube: 48.3mm dia



### COUNTERWEIGHT

Complete with locking collar & 2 metre tube.  
Recycled PVC moulding containing a locking collar and a 2 metre tube. The counterweights are fitted on every other post, maximum distance between counterweights: 4 metres. The counterweight is slim and deemed a low trip hazard.



### CURVED POST

48mm diameter, 1100mm high curved factory assembled upright comprising: 3 cradles, 1 base and an end cap. The curved design allows for shorter counterweight tubes, less counterweights and is less visible from the ground.

### STRAIGHT POST

48mm diameter, 1100mm tall factory assembled upright comprising: 2 cradles, 1 base and an end cap. Maximum distance between post centres: 2 metres.



### 90° ELBOW



### SLEEVE JOINT



### RUN END WEIGHT

Complete with 2 weights, 1 bar, 1 tee, 2 collars & 2 metre tube.



### WALL FLANGE

[GO TO WEBSITE](#)

[MAIN MENU](#)

[< PREVIOUS PAGE](#)

[NEXT PAGE >](#)

# FLOORING & STAIRTREADS

Open steel, expanded metal, gratings, aluminium treadplate, stair tread & planking.

Open Steel Flooring and Stair Treads come in a range of materials and finishes depending on the application.

Pre-fabricated stair treads reduce installation time and can be made to size.


Open Steel Flooring stair treads are strong and durable with slip resistant surfaces and are good structural components for fire escapes and platforms.

Cast Stair Treads complement any traditional external staircase and fire exit.

Aluminium Tread Plate is lightweight, durable, non-slip and low maintenance, making it suitable for a wide range of construction and structural purposes such as vehicle and industry flooring.


Expanded Metal Flooring has a high anti-slip quality used mainly in industrial and factory environment requiring safe and durable flooring surfaces.

Industrial Gratings combine great strength with light structure giving good anti-slip properties - ideal for use on platforms, walkways, gangways, storage floors or where wheeled traffic is in use.

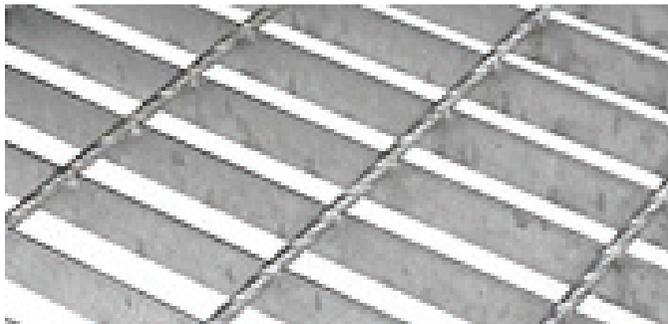

## OPEN STEEL FLOORING

6m x 1m - galvanised

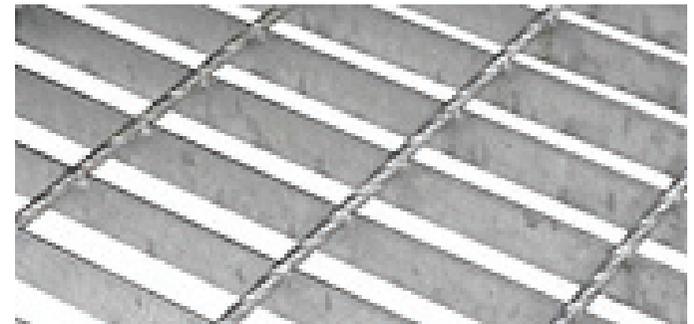

## OPEN STEEL FLOORING

6m x 1m - self-colour



## FLOORING CLIP

41/100 & 30/100



## WALKWAY FIXING CLIP

LRD17A galvanised

Not for use with 2496



## WALKWAY FIXING CLIP

FD943 galvanised

For use with 2496 & 2488s



## ANGLE BRACKET

50x50x160mm. 25x14mm slot holes both sides

[GO TO WEBSITE](#)

[MAIN MENU](#)


[< PREVIOUS PAGE](#)

[NEXT PAGE >](#)



## ANGLE BRACKET


50x50x160mm. 25x14mm slot holes one side.

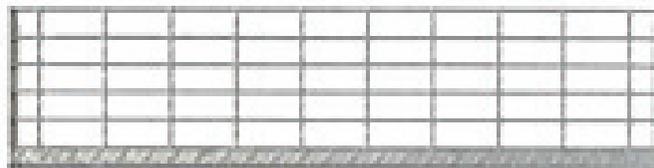

## OPEN STEEL FLOORING STAIR TREAD

Galvanised

41/100-800x242mm-25x5mm

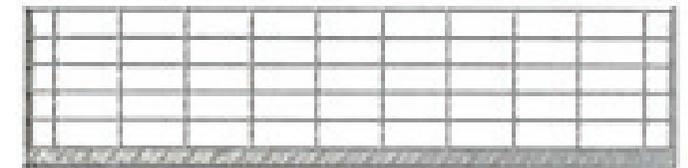


## OPEN STEEL FLOORING STAIR TREAD

Galvanised

41/100-800x283mm-25x5mm


# FLOORING & STAIPTREADS

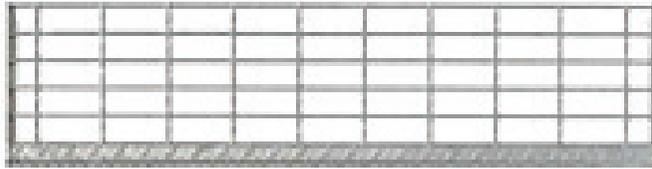

## OPEN STEEL FLOORING STAIR TREAD

Galvanised


41/100-1000x242mm-25x5mm

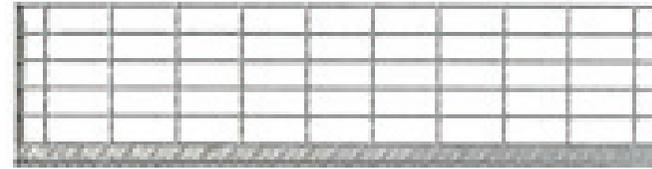

## OPEN STEEL FLOORING STAIR TREAD

Galvanised


41/100-1000x283mm-25x5mm

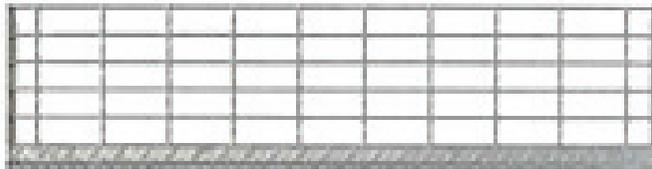

## OPEN STEEL FLOORING STAIR TREAD

Self colour

41/100-800x242mm-25x5mm

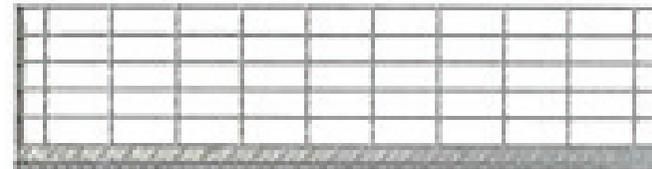

## OPEN STEEL FLOORING STAIR TREAD

Self colour

41/100-800x283mm-25x5mm

[GO TO WEBSITE](#)

[MAIN MENU](#)

[< PREVIOUS PAGE](#)


[NEXT PAGE >](#)



## OPEN STEEL FLOORING STAIR TREAD

Self colour

41/100-1000x242mm-25x5mm

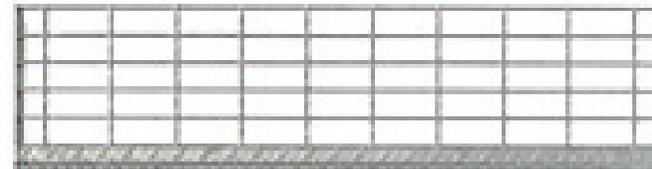

## OPEN STEEL FLOORING STAIR TREAD

Self colour


41/100-1000x283mm-25x5mm

# FLOORING & STAIRTREADS




## END PLATE

For open steel flooring stair treads




## EXPANDED METAL FLOORING 2496

Mild steel 2440x1220mm




## EXPANDED METAL FLOORING 4896

Mild steel 2440x1220mm



## EXPANDED METAL FLOORING 2496A

Aluminium 2440x1220mm



## EXPANDED METAL FLOORING 2496A

Aluminium 2500X1250mm



## METAL FLOOR GRATING

15x30mm mesh - galvanised



## METAL FLOOR GRATING

30x30mm mesh - galvanised



## METAL FLOOR GRATING

30x30mm mesh - self colour



## METAL FLOOR GRATING STEP




## DURBAR STEEL FLOOR PLATES

[GO TO WEBSITE](#)

[MAIN MENU](#)


[< PREVIOUS PAGE](#)

[NEXT PAGE >](#)




## DURBAR INTERMEDIATE LANDING PLATE

1000x1000mm, 3 up, 1 down turn




## DURBAR INTERMEDIATE LANDING PLATE

1250x1250mm, 3 up, 1 down turn




## DDA DURBAR STAIR TREAD 1000X265X4.5MM

50mm turn up / 145mm down



## DDA DURBAR STAIR TREAD 1250X265X4.5MM

50mm turn up / 145mm down



## DURBAR UP/DOWN STAIR TREAD 1000X265X4.5MM

40mm turn up/down

# FLOORING & STAIRTREADS




## DURBAR UP/DOWN STAIR TREAD

1250 x 265 x 4.5mm  
40mm turn up/down



## DURBAR UP/DOWN STAIR TREAD

1250 x 265 x 6mm  
50mm turn up/down



## DURBAR UP/DOWN STAIR TREAD

1500 x 265 x 6mm  
50mm turn up/down



## SPIRAL DURBAR STAIR TREAD

600 x 270 x 4.5mm  
50mm turn up/down  
clockwise



## SPIRAL DURBAR STAIR TREAD

600 x 270 x 4.5mm  
50mm turn up/down  
anti-clockwise



## DURBAR STAIR TREAD

1000 x 265 x 4.5mm  
40mm turn up/down with  
tube



## GALVANISED 'D' TUBE 6M

48.3mm dia, 6m length



## GALVANISED 'D' TUBE 3M

48.3mm dia, 3m length



## DURBAR STAIR TREAD

1000 x 265 x 4.5mm  
40mm turn up/down  
no tube



## STAIR TREAD BRACE

[GO TO WEBSITE](#)

[MAIN MENU](#)

[< PREVIOUS PAGE](#)

[NEXT PAGE >](#)



## ANGLE BRACKET

50 x 50 x 160mm  
with 25 x 14mm slotted  
holes both sides



## ANGLE BRACKET

50 x 50 x 160mm  
with 25 x 14mm slotted  
holes one side

## FLOORING & STAIPTREADS



### DURBAR NON-SLIP NOSING

Highly durable and easy to install to help prevent slips and falls.


25 x 25 x 3 x 1000mm



### PYRAMID NON-SLIP NOSING

Highly durable and easy to install to help prevent slips and falls.

35 x 5 x 3000mm



### ALUMINIUM TREADPLATE

Non-slip for a wide range of construction and structural purposes - lightweight, durable, low maintenance. Five bar pattern.



### ACHIL FIRM-GRIP STAIR TREAD

2mm galvanised

Flat anti-slip with 9mm punched raised holes, and 5mm countersunk hole to drain off water and oil. Specially designed front edge to provide excellent strength; on 30mm width an additional hole to provide an extra fixing point. Designed to British Standard BS EN 14122 Part 3.



### RHINOMIXTE NON-SLIP PLANKING

2mm galvanised

4metres x 50mm.

Holes Ø 5mm burst embossed upwards. Holes Ø 16mm embossed downwards. Open draining surface 21%

Joining clips available.




### RHINOPLUS NON-SLIP PLANKING

2mm galvanised


4metres x 50mm.

Split and embossed serrated surface. Open draining surface 47%. Joining clips available. Recommended for high risk slippery areas.



### O3 PERFORATED PLANK

3mm aluminium



### O2 PERFORATED PLANK

2mm aluminium

[GO TO WEBSITE](#)

[MAIN MENU](#)

[< PREVIOUS PAGE](#)

[NEXT PAGE >](#)

## FARM & FIELD GATES

Metal & wood farm gates, field gates, entrance gates, kissing gates, cattle yard gates, security gates, posts & fittings.

With large stocks we are able to supply you with any style gate required.



### METAL FIELD GATE WITH D-LOOP FASTENING

A superior seven rail field gate.

The punched hole bracing gives this popular mid range gate superior strength to last in the field or farm.

Suitable for most livestock situations.

0.9m - 4.8m length gates available.

50 x 50 rectangular hollow section hang style.

50 x 25 rectangular hollow section latch style.

Sleeved eye holes.



### METAL FIELD GATE WITH SPRING BOLT FASTENING

A superior seven rail field gate.

The punched hole bracing gives this popular mid range gate superior strength to last in the field or farm.

Suitable for most livestock situations.

0.9m - 4.8m length gates available.

50 x 50 rectangular hollow section hang style.

50 x 25 rectangular hollow section latch style.

Sleeved eye holes.



### HEAVY DUTY FARM GATE LOCK

A robust, easy to fit lock for use on metal or wooden gates. The lock couples easy access with deadlocking for security. Pull bolt across to hold gate closed and use key to deadlock for security, more convenient than using a padlock.

5 lever locking mechanism supplied with keep plate, fixing bolts and security nuts.

Lock size: 154 x 130 x 36mm with 77mm throw deadbolt.

Slotted backplate - for use when securing double gates.

Angle bracket - for use when fixing lock to gates with narrow frame section.

[GO TO WEBSITE](#)

[MAIN MENU](#)

[< PREVIOUS PAGE](#)

[NEXT PAGE >](#)

## FARM & FIELD GATES



**GATE PAIR 3660MM (12FT)**



**HALF MESH GATES D-LOOP FASTENING**

A five rail gate with 75mm square mesh covering the lower half. The ideal gate for containing lambs and small dogs. Channel or rectangular hollow section hang style.



**HALF MESH GATES SPRING BOLT FASTENING**

A five rail gate with 75mm square mesh covering the lower half. The ideal gate for containing lambs and small dogs. Channel or rectangular hollow section hang style.



**METAL YARD GATE D-LOOP**

A premier, immensely strong six rail yard gate. The flat bracing and large tube make this an exceptional gate. A very popular field gate. 50 x 50 end style.

[GO TO WEBSITE](#)

[MAIN MENU](#)

[< PREVIOUS PAGE](#)

[NEXT PAGE >](#)

# FARM & FIELD GATES



### METAL YARD GATE SLIDING BOLT

A premier, immensely strong six rail yard gate. The flat bracing and large tube make this an exceptional gate. A very popular field gate. 50 x 50 end style.



### BARRIER GATES 4.57M C/W POSTS


114.3mm dia round metal posts inverted top hinge hanging post. 114.3mm dia round slotted latch posts. Padlockable sliding latch. Hot dip galvanised. Other lengths available 2.4m, 3.05m, 3.6m and 6.1m.

[GO TO WEBSITE](#)

[MAIN MENU](#)


[< PREVIOUS PAGE](#)

[NEXT PAGE >](#)

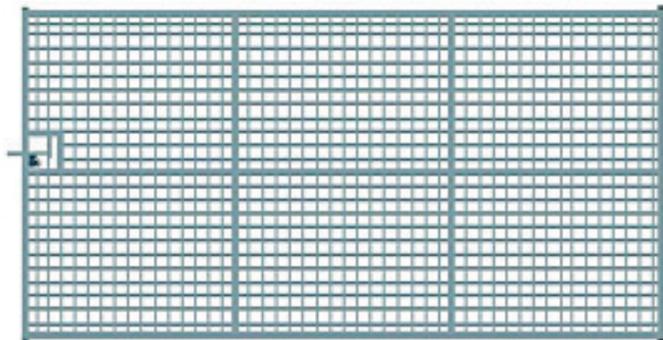

### DEER / SECURITY MESHED GATE KIT 3.6M


3.6m wide, 1.86m high with padlockable sliding bolt c/w timber posts and fitting.

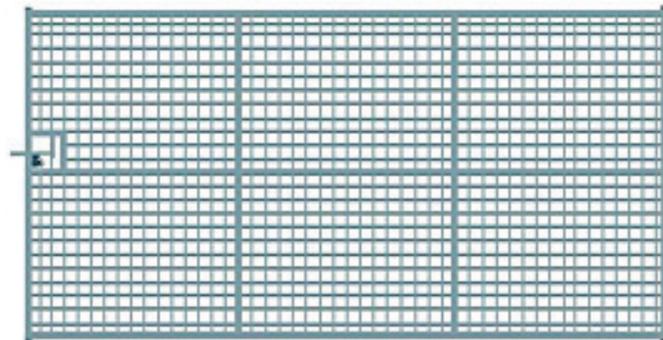

### DEER GATE 3.6M

Fully meshed and is supplied with a padlockable sliding bolt as standard.

## FARM & FIELD GATES

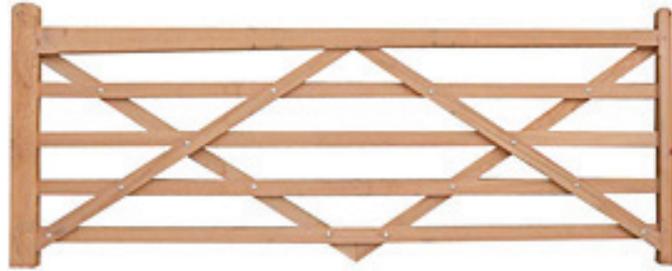

### UNIVERSAL IROKO HARDWOOD GATE

The double cross-bracing gives the universal its distinctive style, commonly seen around the countryside and farm.

The tapered top rail is designed to reduce the pressure on the hanging stile.

Available in both right and left hand hanging. They can be hung as a single leaf or alternatively a combination for wider entrances.

Iroko - The premier hardwood, with the appearance and qualities of teak. Planed and sanded mid brown finish. Much lighter in weight than that of Oak and Keruing, reducing the pressure being put on the fittings and head stock. No treatment required, although a coating of teak oil annually will help maintain its natural colour.



### UNIVERSAL SOFTWOOD GATE KIT 3.6M

A high quality treated softwood gate kit. This product is exceptionally good value and very popular gate for field, farm and entrance.

Gate Kit Includes:

1 x 3.6m wide x 1.2m tall softwood gate

1 x 2.4m x 175 x 175mm four way weathered post

1 x 2.1m x 175 x 175mm four way weathered post

1 x 600mm adjustable hanging kit - galvanised

1 x spring catch set - galvanised.

All gate posts are now UC4 timber which comes with a 15 years desired life.

Other sizes available, please email or call for more details.

[GO TO WEBSITE](#)

[MAIN MENU](#)

[< PREVIOUS PAGE](#)

[NEXT PAGE >](#)

## FARM & FIELD GATES



### UNIVERSAL SOFTWOOD GATE - HANG LEFT

The double cross-bracing gives the universal its distinctive style, commonly seen around the countryside and farm.

The tapered top rail is designed to reduce the pressure on the hanging stile.

They can be hung as a single leaf or alternatively a combination for wider entrances

A high specification gate made from kiln dried Scandinavian Redwood with a top quality semi-planed all over finish.

The hanging style is ex125mm x 75mm with an ex75mm x 75mm closing stile and an ex100mm x 75mm top rail.

Height to top of hanging stile is 47ins, Height to top of top rail is 44ins Standard sizes range from 0.9m to 3.66m

Gates with widths up to 15ft wide are possible.

Pressure treated with Tanalith E in a natural wood.

These gates are ideal for an entrance gate, and strong enough for a field gate.

Posts & fittings also required.



### UNIVERSAL SOFTWOOD GATE - HANG RIGHT

The double cross-bracing gives the universal its distinctive style, commonly seen around the countryside and farm.

The tapered top rail is designed to reduce the pressure on the hanging stile.

They can be hung as a single leaf or alternatively a combination for wider entrances

A high specification gate made from kiln dried Scandinavian Redwood with a top quality semi-planed all over finish.

The hanging style is ex125mm x 75mm with an ex75mm x 75mm closing stile and an ex100mm x 75mm top rail.

Height to top of hanging stile is 47ins, Height to top of top rail is 44ins Standard sizes range from 0.9m to 3.66m

Gates with widths up to 15ft wide are possible.

Pressure treated with Tanalith E in a natural wood.

These gates are ideal for an entrance gate, and strong enough for a field gate.

Posts & fittings also required.



### HEAVY DUTY FARM GATE LOCK

A robust, easy to fit lock for use on metal or wooden gates. The lock couples easy access with deadlocking for security. Pull bolt across to hold gate closed and use key to deadlock for security, more convenient than using a padlock.

5 lever locking mechanism supplied with keep plate, fixing bolts and security nuts.

Lock size: 154 x 130 x 36mm with 77mm throw deadbolt.

Slotted backplate - for use when securing double gates.

Angle bracket - for use when fixing lock to gates with narrow frame section.

[GO TO WEBSITE](#)

[MAIN MENU](#)

[< PREVIOUS PAGE](#)

[NEXT PAGE >](#)

## FARM & FIELD GATES



### YEOMAN SOFTWOOD GATE KIT 3.6M - HANG LEFT

Gate Kit Includes:

1 x 3.6m softwood Yeoman entrance gate

1 x galvanised fittings

2 x 2.4m x 175mm x 175mm UC4 four way weathered posts.



### YEOMAN SOFTWOOD GATE KIT 3.6M - HANG RIGHT

Gate Kit Includes:

1 x 3.6m softwood Yeoman entrance gate

1 x galvanised fittings

2 x 2.4m x 175mm x 175mm UC4 four way weathered posts.



### YEOMAN SOFTWOOD WOODEN GATE - HANG LEFT

Manufactured by Wheelwrights in years gone by, the Yeoman still remains the premier entrance gate to enhance any property.

This gate can be hung on its own, single leaf, left or righthanded, or as a pair in any combination.

For example - a 3.0 metre for car access with a 1.2m pedestrian access.



### YEOMAN SOFTWOOD WOODEN GATE - HANG RIGHT

Manufactured by Wheelwrights in years gone by, the Yeoman still remains the premier entrance gate to enhance any property.

This gate can be hung on its own, single leaf, left or righthanded, or as a pair in any combination.

For example - a 3.0 metre for car access with a 1.2m pedestrian access.

[GO TO WEBSITE](#)

[MAIN MENU](#)

[< PREVIOUS PAGE](#)

[NEXT PAGE >](#)

## FARM & FIELD GATES



### CLEFT CHESTNUT FENCING - 87 METRES

For additional barbed wire or mesh panel please call us on 01424 844702 or 07971 882241.



### BRIDLE GATE IN FRAME - 6 RAIL GALVANISED

1540mm wide x 1220mm high supplied in one unit, for added strength and ease of installation.

The standard gate has a fitted self closing mechanism, this can be ordered without if required.

An extended handle enables easy opening from horseback, and a lower handle for wheelchair users.

Galvanised finish, price includes posts.



### BRIDLE GATE IN FRAME - 5 RAIL GALVANISED WITH PART MESHED BASE

1540mm wide x 1220mm high supplied in one unit, for added strength and ease of installation.

The standard gate has a fitted self closing mechanism, this can be ordered without if required.

An extended handle enables easy opening from horseback, and a lower handle for wheelchair users.

Galvanised finish, price includes posts.



### KISSING GATE - GALVANISED

Kissing gates are a common site in the English countryside and are used for public access within a fence line. The benefit of using a kissing gate over a stile is access is easier for the less mobile and ramblers with dogs.

A very strong galvanised system.

Made from 40mm galvanised steel this product could potentially last a lifetime.

Simple to install, the framework bolts the system together to prevent any post movement while the gate self closes against the frame.

[GO TO WEBSITE](#)

[MAIN MENU](#)

[< PREVIOUS PAGE](#)

[NEXT PAGE >](#)

## FARM & FIELD GATES



**BOLT-ON SUPPORT WHEEL**




**GRAVITY CATCH TO FIX IN CONCRETE - GALVANISED**



**GATE POST - UC4 TREATED REDWOOD**

2.1m 175 x 175mm treated UC4 timber gate post with a pyramid top.



**19MM HOOK ON HINGE PLATE - GALVANISED**



**K POST MIX - RAPID SETTING CONCRETE 20KG**

K POST is a rapid setting concrete for securing metal, wood and concrete posts and is now available in showerproof 20kg sacks.

Suitable for use on fences, decking, gazebos etc.

Ready to use.

No mixing is required.

Application is in 3 easy steps.

Sets in 5 to 10 minutes.

Finished job within hours.

New showerproof, tough packaging benefits:- Store on-site in all weathers - No need to cover - Stronger more durable 20kg sacks - Reduces waste and damage - Non-slip bag - Cleaner and safer handling.



**PADLOCKABLE GARAGE DROP BOLT**



**SPRING CATCH SET**



**STANDALONE DOGWAY**

The Dogway is made from recycled plastic and timber with Galvanised steel brackets.

Height is 1-2m and 500mm wide post to post.

The handle for the latch is easy to use from either side and the latch is light to lift.

The Standalone Dogway is designed to fit in the fenceline alongside a stile.



**WOODEN GATE HINGE/ HANGING SET 600MM GALVANISED**

A 600mm adjustable hinge set, complete with bolt and drive to hang a gate.

Suitable for gates 2.4m - 4.2m to be used with wooden posts.

[GO TO WEBSITE](#)

[MAIN MENU](#)


[< PREVIOUS PAGE](#)

[NEXT PAGE >](#)



**BOLT-ON DROP BOLT**

## FARM & FIELD GATES



### **HANGING POST 114.3MM O.D - GALVANISED**

114.3mm (4.5") overall diameter, galvanized steel hanging post to suit our range of metal gates.



### **SLOTTED POSTS 114.3MM O.D. GALVANISED**

114.3mm (4.5") diameter galvanized steel slotted post to suit our range of metal gates with a S-bolt fastening.



### **METAL GATE FIXING KIT**

Includes all the fixings needed to hang and close our range of metal gates on wooden posts.

Includes:

- 1 x Hinge hook to bolt
- 1 x Hinge hook to drive
- 1 x large auto catch
- 2 x 75mm coach screw.



### **SIMPLE DROP OVER FRAME**



### **PADLOCKABLE HEAVY DUTY DROP OVER FRAME FOR GATE PAIRS - GALVANISED**

[GO TO WEBSITE](#)

[MAIN MENU](#)

[< PREVIOUS PAGE](#)

[NEXT PAGE >](#)