

Wetterschutzkappe | Protection-cap



Ansaugsperr / Lecksicherung


Anti-suction-device / Safety leak cap screw



Stellschraube | Adjustment Screw



hygroskop. Scheiben | Hygroscopic Discs

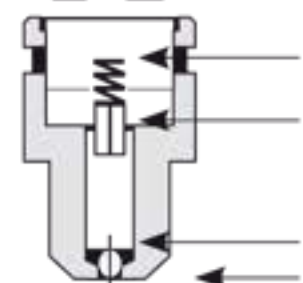

Druckfeder Gehäuse (ms58 vern.) | Spring Housing (ms58)

Dichtzylinder | Sealing-cylinder

O-Ring | O-Ring

Außengewinde M11x1 | Male Thread M11x1


Lecksicherungs-Kappe (ms58 vern.)

Safety leak cap (ms58 nickel plated)



Außengewinde G 1/8" ms58 vern.  
Male Thread G 1/8" ms58

hygroskop. Scheiben  
Hygroscopic Discs

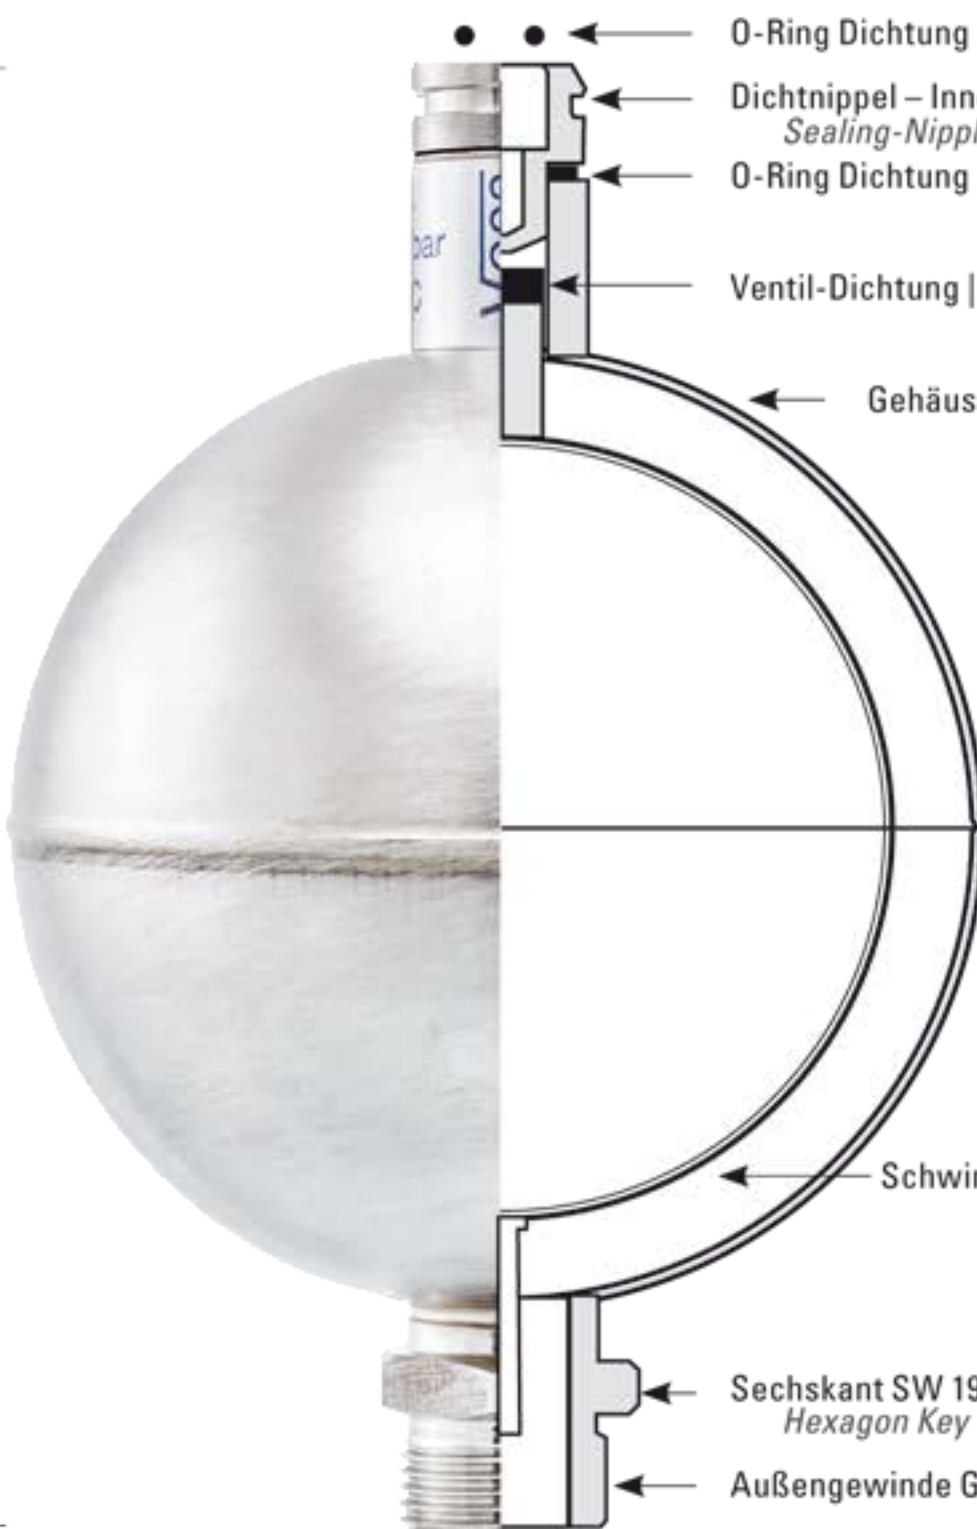

O-Ring Dichtung | O-Ring Gasket

Dichtnippel – Innengewinde G 1/8"

Sealing-Nipple – Female thread G 1/8"

O-Ring Dichtung | O-Ring Gasket

Ventil-Dichtung | Valve Gasket

Gehäuse | Housing

Schwimmer aus Edelstahl (AISI 316Ti)

Float Stainless Steel (AISI 316Ti)

Sechskant SW 19


Hexagon Key Width 19mm

Außengewinde G 3/8" | Male Thread G 3/8"

80 mm

Wir empfehlen den PURG-INOX 2000 mit Kugelhahn-Absperrung aus Edelstahl zu montieren. Kugelhahn-Absperrung G 3/8"

We recommend to mount PURG-INOX 2000 on a Ball Valve Shut-off. Ball valve Shut-off G 3/8"

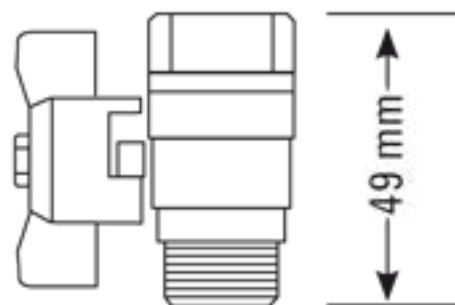

G 3/8"