




Pass-Through Chillers

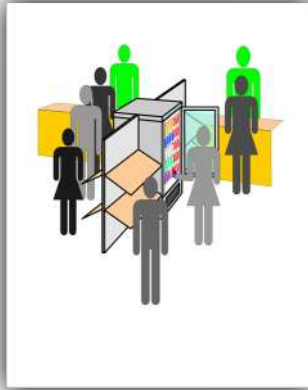

The **eCold** range... ...saving pounds and the planet.

The *eCold* range is designed to be good to your pocket as well as the environment. Low-voltage fans and LED lighting put very little waste heat into the cabinet and improved insulation and efficient compressors maximise cooling performance while using less energy. *eCold* cabinets are also designed to be virtually maintenance-free, with no fluorescent tubes to change, and condensers that never require unblocking.

Details

Pass-through *eCold* cabinets are available in four sizes and can be used in island bars, for back-filled sites or, in the case of the 125P, in till areas to encourage impulse sales. Designed primarily for the storage and display of bottled beverages, these cabinets are also suitable for foodstuffs. They are manufactured from rust resistant zinc-coated steel with a hard wearing powder-coat finish, or from brushed stainless steel. The standard painted finishes are black and silver but other RAL and Pantone colour finishes are available to special order. The interior is stucco aluminium or stainless steel. The interior is fan assisted for consistent chilling performance and the maintenance-free condenser is fan-cooled for increased efficiency. The doors are double glazed, hinged and lockable (not 125P). Solid doors are available as an option for all models. A top mounted lightbox is also available, great for product branding.

Cabinet Specifications

Features

- Fan assisted evaporator for rapid cooling
- Fan assisted, maintenance-free condenser
- Automatic defrost and re-evaporation
- Digital temperature controller
- LED lighting gives excellent product display
- Double glazed doors (lockable on 276E models & 7050)

Options

- Solid door(s)
- Choice of black or silver painted exterior
- Other colours to special order
- Stainless steel exterior and/or interior
- Stainless steel doorframes/solid doors
- 14 - 16°C temp range for red wine
- Topmounted lightbox (adds 180mm to height)
- Fixed glass panel (276E models only)
- Sliding doors to front OR rear, not both (276E models only)
- R134a refrigerant, 60Hz electrics to special order



	125P	276E	276E SLIM	7050
H (mm)	1250	905	905	1740
W (mm)	550	1000	1000	1000
D (mm)	680	750	600	750
Shelves	3	2	2	5
Capacity (ltr)	215	290	210	720
Refrigerant Charge (g)	59	85	58	125 (x2)
Power Rating (W)	110	130	130	300 (x2)
Weight (kg)	62	100	98	120

