


EUROWEB

l a s h i n g s y s t e m s

CB25

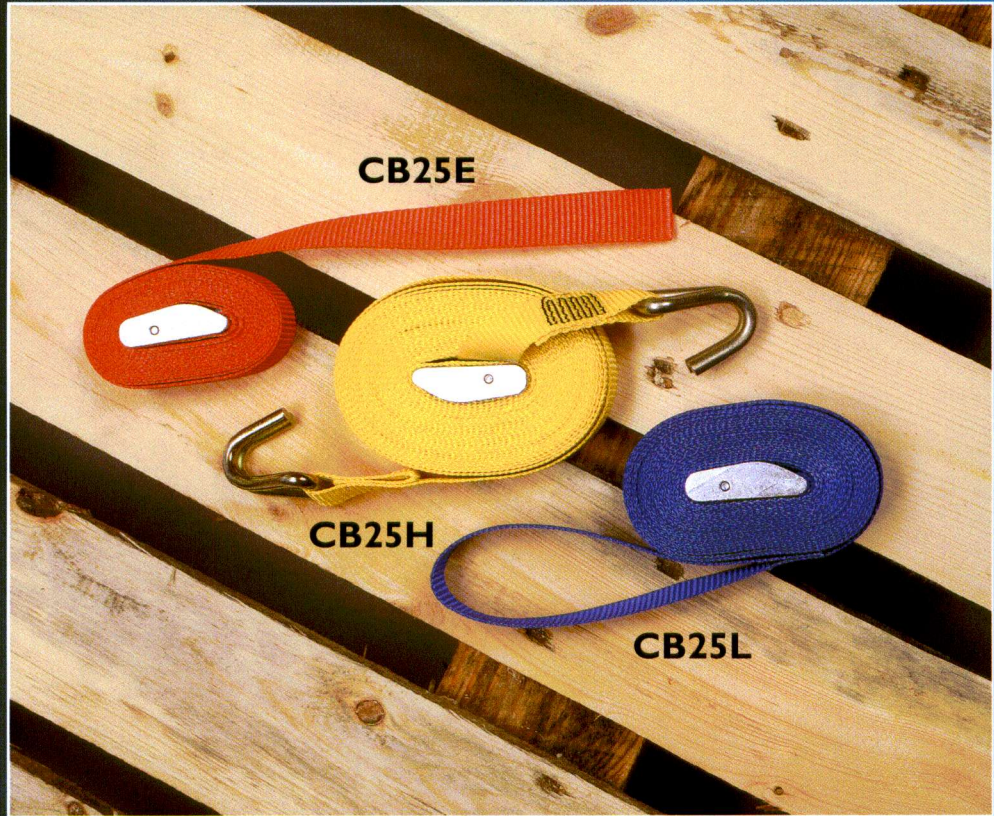

SPECIFICATION

The CB25 system is a multipurpose system for light duty applications. The 25mm polyester webbing is used in conjunction with a 400kg cam buckle to give a Rated Assembly Strength (RAS) of 200kg.

CB25 H	WIRE HOOK
CB25 L	LOOPED END
CB25 E	ENDLESS STRAP
CB25 S	PLASTIC COATED S HOOK

The RAS is half the breaking strength and a minimum of two straps on a load should always be used.

Heavier duty systems are available using 25, 35 and 50mm cam buckles.



GTF

EUROWEB LASHING SYSTEMS
22-22A Hawthorn Road Industrial Estate,
Eastbourne, East Sussex BN23 6QA
Tel: +44 (0)1323 646925 Fax: +44 (0)1323 728463
email: sales@euro-web.uk.com www.euro-web.uk.com