

EUROWEB

l a s h i n g s y s t e m s

RL50



SPECIFICATION

The RL50 system is recommended for heavy commercial vehicles and is extensively used by the transport industry. It is manufactured to BS 5759, has a break strength of 5000kg and for calculating loads, has a Rated Assembly Strength (RAS) of 2500kg.

The system is manufactured using 50mm polyester webbing. A wide range of end fittings are available.

RL50E	ENDLESS STRAP
RL50D	DELTA
RL50 HDR	CHASSIS HOOK
RL50 TSH	TWISTED SNAP HOOK
RL50 FSH	FLAT SNAP HOOK

It is recommended that a minimum of two systems are used to secure a load and that the RAS is strictly adhered to.

EUROWEB LASHING SYSTEMS
22-22A Hawthorn Road Industrial Estate,
Eastbourne, East Sussex BN23 6QA

Tel: +44 (0)1323 646925 Fax: +44 (0)1323 728463
email: sales@euro-web.uk.com www.euro-web.uk.com




GTF



EUROWEB

l a s h i n g s y s t e m s


RL50




RB5050WH



RB5040NH




RB5050LWH





- 1: CL5050(DF)
- 2: RL5030
- 3: DR5050(F)



- 4: TSH5050
- 5: FSH5050
- 6: FSH4525



- 7: WH5050T
- 8: WH5050 (SNAP)
- 9: WH5050

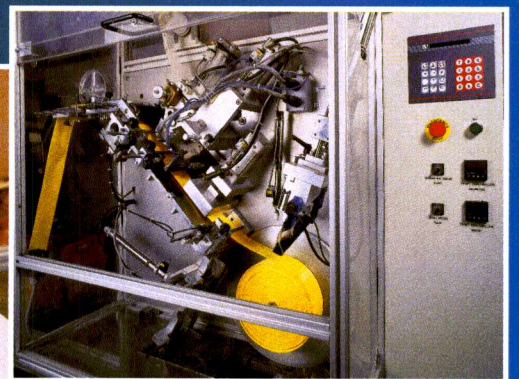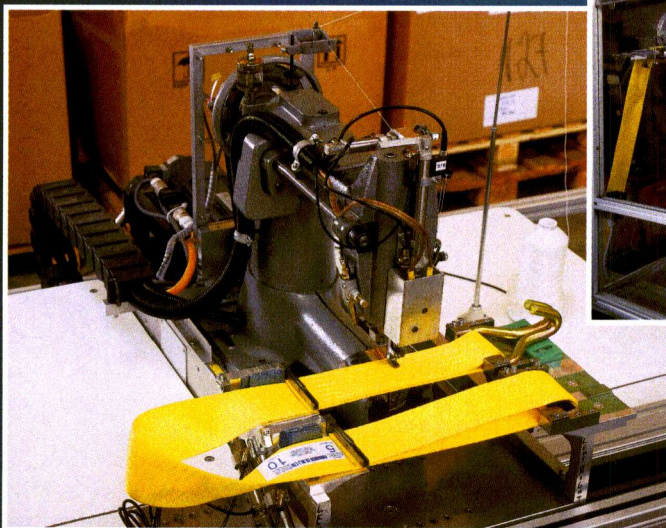

GTF