


## Removable Parking Post (RPP) 900mm Galvanised & Colour





The Removable Parking Post is suitable for areas where occasional access is required. The post is typically locked in place over night and removed during the day. Additional ground sockets are available for storing the post in a convenient location when not in use.

The RPP is available in galvanised and galvanised and coated finish. The post is supplied without a padlock thus allowing the user to specify their own preferred lock (The RSP variant includes a High Security Lock).

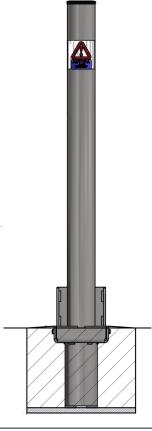

Part Number	<u>Description</u>	<u>Lift Weight (kg)</u>	Weight (kg)
138 100 241	60mm Galvanised - Removable	6kg	10kg
138 100 242B	60mm Galvanised & Black - Removable	6kg	10kg
138 100 242Y	60mm Galvanised & Yellow - Removable	6kg	10kg
138 100 242	60mm Galvanised & Colour - Removable	6kg	10kg
138 100 601	76mm Galvanised - Removable	6kg	10kg
138 100 603	76mm Galvanised & Black - Removable	6kg	10kg
138 100 602	76mm Galvanised & Yellow - Removable	6kg	10kg
138 100 604	76mm Galvanised & Colour - Removable	6kg	10kg
138 100 291	90mm Galvanised - Removable	6kg	10kg
138 100 292B	90mm Galvanised & Black - Removable	6kg	10kg
138 100 292Y	90mm Galvanised & Yellow - Removable	6kg	10kg
138 100 292	90mm Galvanised & Colour - Removable	6kg	10kg

## **Product details**

- 900mm (Height above ground)
- 3mm wall thickness
- 60mm, 76mm, and 90mm diameter

- · Socket 220mm (below ground)
- Price excludes padlock to secure

## Installation & use

Bolt down to a suitable concrete surface.

Telescopic, removable and concrete in are supplied with welded fixing spikes to ensure firm ground anchorage into concrete.

Telescopic, removable and concrete in require a suitable excavated hole for installing into concrete.

Products are guaranteed for 12 months (if installed and used correctly).



www.autopa.co.uk +44 (0)1788 550556

