

1.1730 Tool Steel

Quality 1.1730 tool steel cut and delivered straight to your tool room, whatever size you need.

1.1730 carbon tool steel stockholders and suppliers, delivering to the whole of the UK.

1.1730 is a medium carbon unalloyed tool steel grade offering reasonable tensile strength. This grade can be hardened and tempered to produce a good surface hardness with moderate wear resistance. 1.1730 is widely used for components that require good machinability and wear resistant properties but does not justify the costs of an alloyed tool steel. Available from stock in round bar and cut plate. We welcome export enquiries for tool steel. Please contact our sales office and consult our shipping policy for further details.

Popular [tool steel](#) grades we supply


[O1](#) | [D2](#) | [D3](#) | [O2](#) | [D6](#) | [A2](#) | [S1](#) | [H13](#) | [P20](#) | [P20S](#) | [420](#) | [1.2083](#) | [2767](#) | [M2](#) | [M42](#) | [Ground Flat Stock 1.1730](#)

Form of Supply

West Yorkshire Steel are steel stockholders and suppliers of 1.1730 steel round, square and flat. The steel can be sawn to your required length in 1 off or multiple cut pieces. Ground 1.1730 steel bar can be supplied, providing a precision ground steel bar to tight tolerances.

Applications

1.1730 is suitable for many general engineering applications, such as bolsters, bending dies, guide plates, jigs and fixtures.

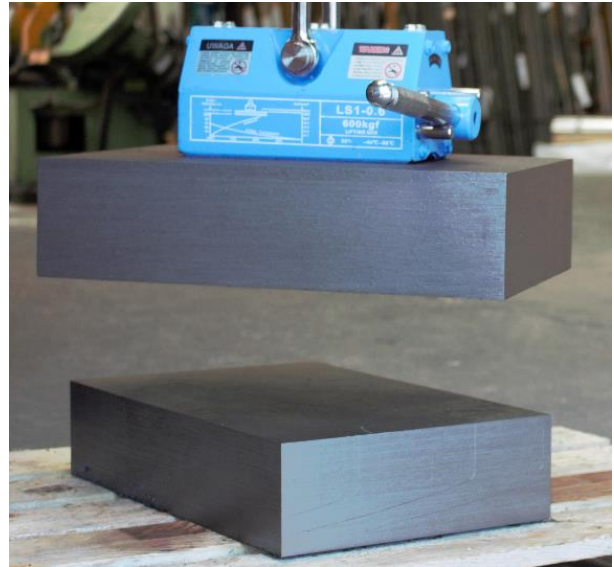

Contact our experienced sales team who will assist you with your enquiry.

- Sheet
- Flat
- Plate
- Diameter

Typical Analysis

Carbon	0.45%	Silicon	0.25%
Sulphur	0.03% max	Manganese	0.60%
Phosphorous	0.03% max		

Ground Flat Stock

Precision ground flat stock / gauge plate can be supplied in 500mm / 1000mm lengths. Non-standard sizes can be produced in approximately 2 to 3 weeks.

Forging

Preheat carefully, then raise the steel to a temperature of 1100°C for forging. Do not forge below 850°C. After forging cool slowly, preferably in a furnace.

Annealing

Heat slowly to 680-710°C, soak well. Cool slowly in the furnace.

Hardening

Heat the component slowly to 820-870°C and allow it to be heated through. Quench in oil or water.

Tempering

Temper immediately after quenching whilst tools are still hand warm. Re-heat to the tempering temperature then soak for one hour per 25 millimetre of total thickness (2 hours minimum) Cool in air.

Welding

We recommend you contact your welding consumables supplier who should provide you full assistance and information on welding 1.1730 steel

Heat Treatment

Heat treatment temperatures, including rate of heating, cooling and soaking times will vary due to factors such as the shape and size of each 1.1730 steel component. Other considerations during heat treatment include the type of furnace, the quenching medium and work piece transfer facilities. Please consult your heat treatment provider for full guidance on heat treatment of 1.1730 steel.

Certification

1.1730 steel is available with a cast and analysis certificate, please request when placing any orders.

Quality Assured Supply

1.1730 tool steel is supplied in accordance with our ISO 9001:2015 registration.



West Yorkshire Steel Ltd
Sandbeck Industrial Estate,
Wetherby, Leeds,
LS22 7DN UK

Call: 01937 584440
Fax: 01937 580128
Email: sales@westyorkssteel.com
 

QUOTE ME



Information provided on our datasheets has been drawn from various recognised sources, including British, European and International Standards, recognised industry references (printed & online) and manufacturers' data. No guarantee is given that the information is from the latest issue of those sources or about the accuracy of those sources. Material supplied by the Company may vary significantly from this data but will conform to all relevant and applicable standards. Any of the products detailed may be used for a large range of purposes and as WYS has no control over their use; WYS specifically excludes all conditions or warranties expressed or implied by statute or otherwise as to dimensions, properties and/or fitness for any particular purpose, whether expressed or implied. © West Yorkshire Steel Ltd. All Rights Reserved.