


# Deltaqua International. Ltd.

Water Treatment Systems



## NEEDLE VALVE T” Bar HANDLE

**DESIGN STANDARD: ASMEB16.34 GB/T12237**

**THREADED ENDS: 3/4” BSPP、**

**WORKING PRESSURE: 6000 psi**


**TEMPERATURE RANGE:- 20°C~180°C**

**MATERIAL: 316 L**

**TEST&INSPECTION: API598 JB/T9092**

**PRESSURE RATED: 6000 psi**

**TEMPERATURE RATING: 200 Deg C**

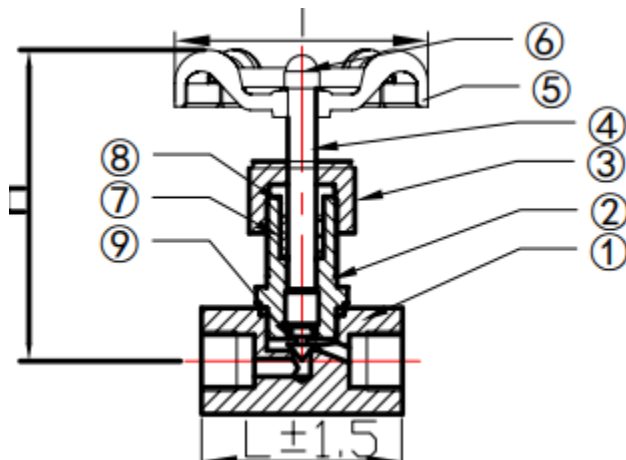

1. Body width 60 mm x 32mm
2. Bonnet
3. Locknut 22mm
4. Stem SS316
5. Handle “T” Bar
6. N/A
7. Packing
8. Packing Gland SS 316
9. Disc SS 316

Unit 1A Red House Farm Industrial Centre – Cransford – Woodbridge– Suffolk – IP13 9NY UK.

Company Registration No. 2961272

Tel: +44(0)1728-664184 – Fax: +44(0)1728-664185

Email: -sales@Deltaqua.co.uk - www.deltaqua.co.uk