

See Page 2 for Product Specification

CUSTOMER APPROVAL SIGNATURE

UNLESS STATED OTHERWISE, GENERAL TOLERANCES TO ISO 2768
TOLERANCE CLASS 'm' FOR MACHINING & 'v' FOR FABRICATION

Additional Site Requirements
Platform fitted with load arrest


Drawn By:	Checked By:	Approved by - Date	Quantity	Date 20/05/2016	Customer Ref.	PH Job Number
Title: Goods Lift Malmesbury, Wiltshire 500 kg General Arrangement			Material As per part		Design State WorkInProgress	
Manual Handling Solutions 58, Paige Close, Watlington, Kings Lynn Norfolk PE33 0TQ Tel 01553 811977 sales@manualhandlingsolutions.co.uk			Drg No. Q125247_GF_MASTER		Dimensions mm	
Part No. GF_MASTER			Reference Q125247		Scale on A3 1:45	
			Edition B		Projection 1st Angle	
			Sheet Number 1 of 2			

* Minimum structural opening

Malmesbury Wiltshire (Q125247B)

Product Specification

Operation	Lifting and lowering GOODS ONLY (no passengers)
Maximum Working Load	500 kg
Number of Stops	2 (Ground + 1)
Travel	Ground to First Floor - 3294 mm (inc. Sump) First to Second Floor - 0 mm
Usable Platform Size	2500 mm (w) x 1500 mm (d)
Platform Guarding	900 mm high barriers to suit loading direction - No gates
Lift Speed	0.2 m/s
Power Supply Required	415 V, 2.2 kW, Three phase and Neutral supply terminated in a double pole isolator at lower level
Controls	Hold to run push button controls (12 v), with emergency stop, adjacent to the gates at each level
Drive Type	Suspension chains with hydraulic motor drive (Twin Mast)
Power Pack	Mounted remotely to suit application on a floor mounted stand
Loading Configuration	Load Through
Closed Height	50 mm platform thickness
Ramp	500mm fixed ramp provided
Lift Pit	Floor mounted, no pit required
External Shaft Footprint	3360 mm (w) x 1780 mm (d)
Shaft Enclosure	Self supporting steel frame, 1" x 1" mesh filled
Door Type	Electrically Interlocked 2200 mm high double gates
Lift & Guard Colour	std matt black
Documentation	CE Mark and Declaration of Conformity Operation and Maintenance Manual issue on completion LOLER Report of Thorough Examination and Test issued on commissioning
Training	Operator training carried out on completion
Duty Cycles	Based on 10 cycles per hour on a single shift basis
Warranty	12 months parts and labour for customers in the U.K. mainland only. Others are on a parts only basis.
Unit Mass	1450 Kg

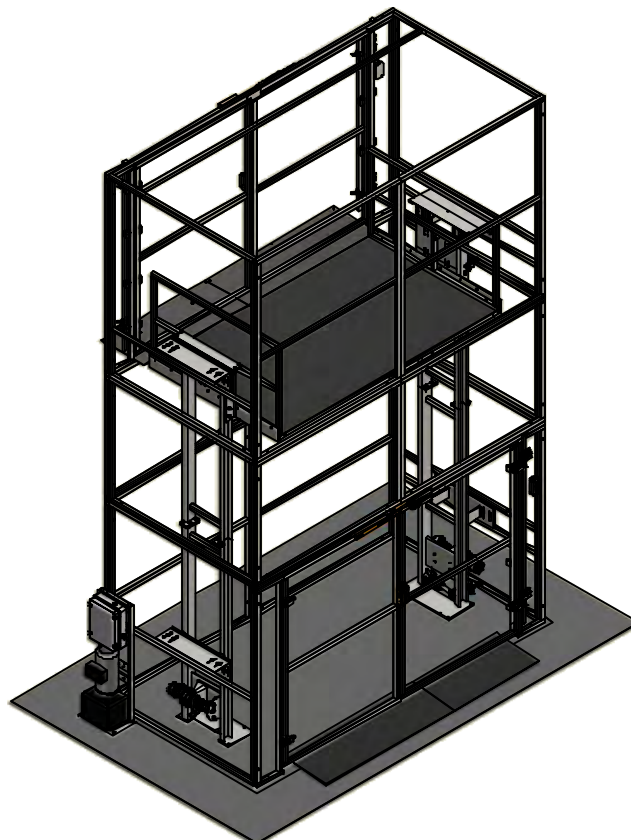

CAD version of your Lift