


## Durapac CB-35 Static Compactor

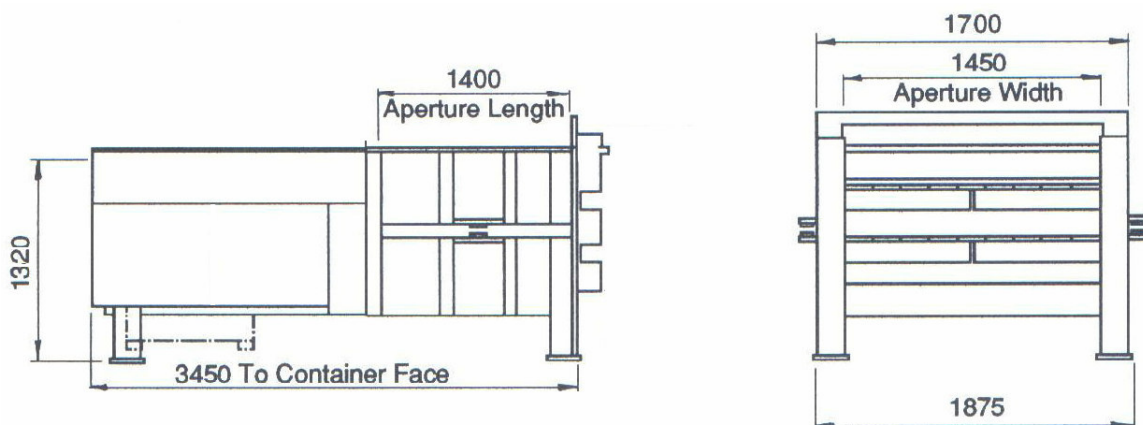

### **Compact & Bale Limited**

Unit 6, The Hop Kilns, Goblands Farm Business Centre,  
Court Lane, Hadlow, Tonbridge, Kent TN11 0LT

T: + 44 (0)1732 85 22 44 F: + 44 (0)1732 85 11 33

E: [info@compact-and-bale.com](mailto:info@compact-and-bale.com) W: [www.compact-and-bale.com](http://www.compact-and-bale.com)

**Technical Specification**

<b>Data:</b>	<b>CB-35</b>
Motor rating	7.5 kw
Charge box volume	1.85m <sup>3</sup>
Volume per stroke	1.44 m <sup>3</sup>
Volume per hour	148 m <sup>3</sup>
Cycle time	35 secs
Compaction Force	35 tonne
Operating pressure	2300 psi
Clear aperture length	1400 mm
Clear aperture width	1450 mm
Charge box depth	900 mm
Loading height	800 mm
Aperture height	920 mm
Ram depth	700 mm
Penetration into container	355 mm
Overall length (to container face)	3450 mm
Overall width	1700 mm
Height to top of charge box	1320 mm
Dock height	1320 mm
Power supply (415v, 3 phase + e + n)	32A M50 (or type D)
Oil reservoir capacity	120 litres
Total weight	2,950 kg

Machines are supplied with up to 6m of 5 core, 4mm, braided, flexible control cable complete with 5-pin socket.