


Grade 80 "Economy" Clevis Sling Hooks with Safety Catch



- Grade 80 alloy steel.
- Painted finish.
- Marked with manufacturers mark/ID, grade 8, size and part number.
- Minimum breaking load is 4 x W.L.L, proof load is 2 x W.L.L.
- Spare safety catch kits available.

code	chain dia. (mm)	A (mm)	D (mm)	H (mm)	R (mm)	O (mm)	G (mm)	W.L.L (tonnes)	weight (kgs/each)
K1501	7/8	9.5	37	32.5	85.5	29	17	2	0.52
K1502	10	13	46	35	104	39	23	3.15	1.05
K1503	13	16.5	56	42.5	128	47	26	5.3	2
K1504	16	21.5	60	54	150	55	34	8	3.7




Grade 80 "Economy" Eye Type Sling Hooks with Safety Catch



- Grade 80 alloy steel.
- Painted finish.
- Marked with manufacturers mark/ID, grade 8, size and part number.
- Minimum breaking load is 4 x W.L.L, proof load is 2 x W.L.L.
- Spare safety catch kits available.

code	chain dia. (mm)	R (mm)	E (mm)	O (mm)	D (mm)	F (mm)	G (mm)	H (mm)	W.L.L (tonnes)	weight (kgs/each)
K1551	7/8	100	11	30	26	25	17	22	2	0.4
K1552	10	119	15	34	39	38	23	33	3.15	0.9
K1553	13	151	19	39	54	43	26	43	5.3	1.7
K1554	16	182	23	46	64	50	34	50	8	3.2

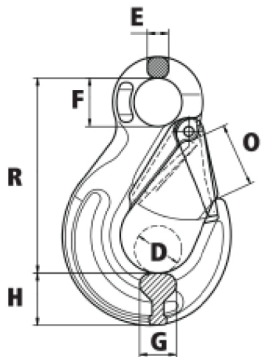

NEVER EXCEED MAXIMUM CAPACITY

Ensure operator follows safe use instruction guidelines