


Grade 80 "Economy" Component Connector



- Grade 80 alloy steel.
- Painted finish.
- Marked with manufacturers mark/ID, grade 8, size and part number.
- Minimum breaking load is 4 x W.L.L, proof load is 2 x W.L.L.
- Spare pins and bushes available.

code	chain dia. (mm)	O (mm)	R (mm)	G (mm)	W.L.L (tonnes)	weight (kgs/each)
K1610	7/8	18	62.5	8.5	2	0.146
K1603	10	25	68	10.8	3.15	0.3
K1604	13	29	87	15	5.3	0.7
K1605	16	34.5	108.4	19.8	8	1.1
K1606	20	41	121.5	24	12.5	1.8




Grade 80 "Economy" Clevis Self Locking Hook



- Grade 80 alloy steel.
- Painted finish.
- Marked with manufacturers mark/ID, grade 8, size and part number.
- Minimum breaking load is 4 x W.L.L, proof load is 2 x W.L.L.
- Spare triggers available.

code	chain dia. (mm)	O (mm)	A (mm)	H (mm)	D (mm)	R (mm)	G (mm)	W.L.L (tonnes)	weight (kgs/each)
K1801	7/8	34	9.5	24	46	121	30	2	0.8
K1802	10	44	12	28.5	56	146	44	3.15	1.5
K1803	13	52	15	40	69	182	56	5.3	2.8
K1804	16	60	18	50.5	86	218	71	8	5.6

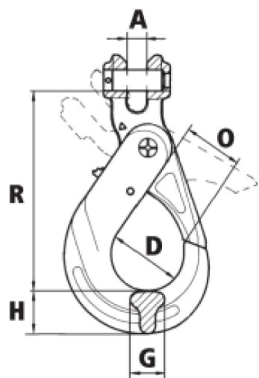

NEVER EXCEED MAXIMUM CAPACITY

Ensure operator follows safe use instruction guidelines